

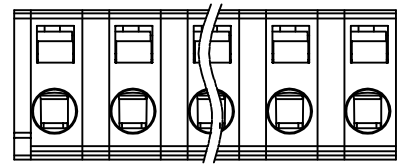
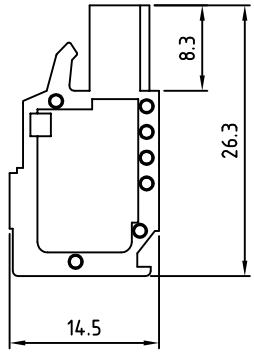
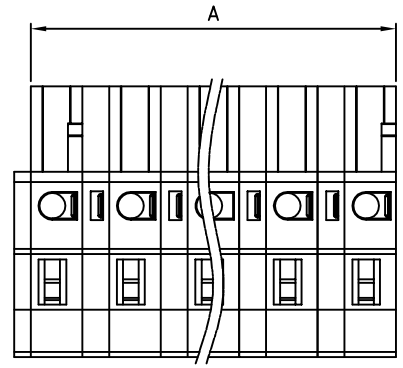


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

- Material:
- Insulator(housing): Thermoplastic (UL94V-0)
 - Wire guard: Stainless steel
 - Terminal Body(contact pin): PhBz.
 - Insulator(Cover): Thermoplastic (UL94V-0)
- Electrical: cULus
- Voltage rating: 300 V
 - Current rating: 15 A
 - Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
 - Wire strip length: 6-7 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -33°C to +105°C
- RoHS Compliant

PART NUMBER:
OSTHIXX3050

↓	↓
No. of Poles	COLOR:
02: 2 Poles	0: Black
03: 3 Poles	5: Green (Standard)
... ..	6: Blue
16 16 Poles	8: Grey

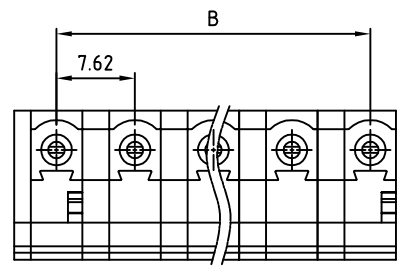

POLE		2	3	4	5	6	7	8
A		12.62	20.24	27.86	35.48	43.10	50.72	58.34
B		7.62	15.24	22.86	30.48	38.10	45.72	53.34
Tol.		±0.10			±0.15			
POLE	9	10	11	12	13	14	15	16
A	65.96	73.58	81.20	88.82	96.44	104.06	111.68	119.30
B	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
Tol.	±0.20				±0.30			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE: OSTHI 7.62mm With Hook Series

PART NO. OSTHIXX3050 DWG NO. OSTHIXX3050.DWG

APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Tony 2007.12.04	Tony 2007.12.04		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°

SHEET: 01/01 REV.: B