
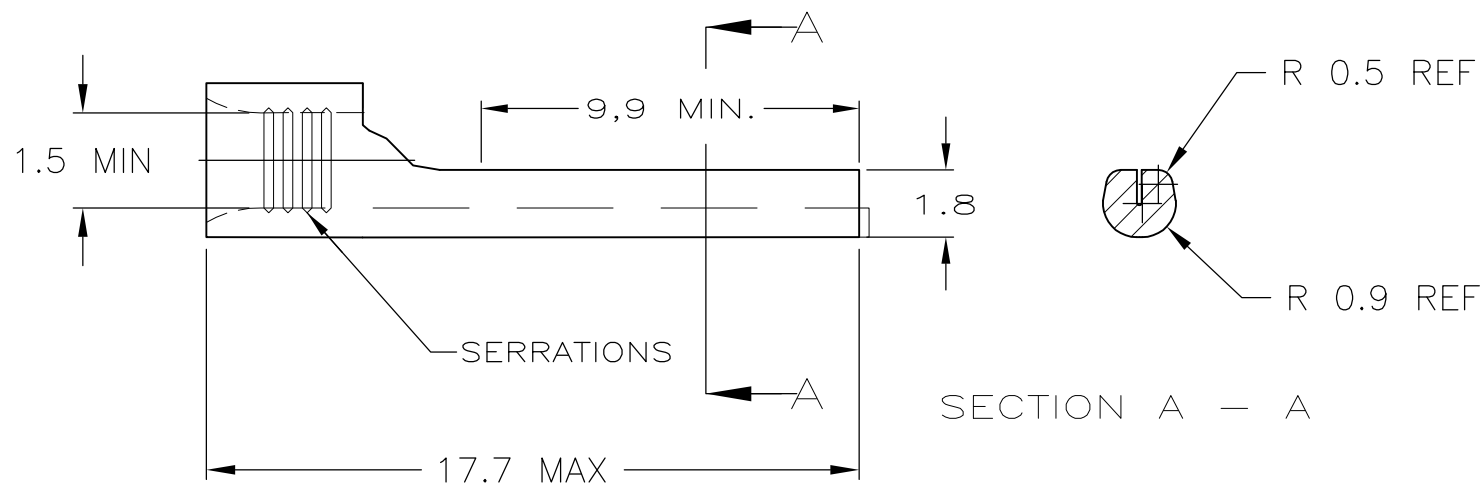


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	86	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER ECR 10-007446	10AUG10	JR	TM

- 1 170°C MAXIMUM OPERATING TEMPERATURE
- 2 STOCK 0.77±0.04 THK
- 3 WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² [509-3,260 CMA]
SOLID OR STRANDED
- △ 4 PRELIMINARY - NOT FOR PRODUCTION

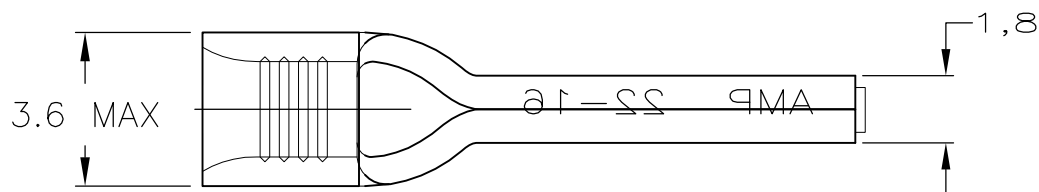

TAPE & REEL	TIN PLATED PER ASTM B-545 0.00254 MIN EXT THK	COPPER PER ASTM B-152, ANNEALED	△ 4 2-165166-1
LOOSE PIECE	TIN PLATED PER ASTM B-545 0.00254 MIN EXT THK	COPPER PER ASTM B-152, ANNEALED	165166-0
PACKAGING	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 04DEC08	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK T MICHIELUTTI 04DEC08	NAME PIDG WIRE PIN (LONG) 22-16	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHIELUTTI 04DEC08	PRODUCT SPEC -	
0 PLC ± -		APPLICATION SPEC -		
1 PLC ± 0.2		SIZE A3		
2 PLC ± -		CAGE CODE 00779		
3 PLC ± -		DRAWING NO C-165166		
4 PLC ± -		RESTRICTED TO -		
ANGLES ± -		WEIGHT -		
MATERIAL -		CUSTOMER DRAWING		
FINISH -		SCALE 5:1 SHEET 1 OF 1 REV B		