
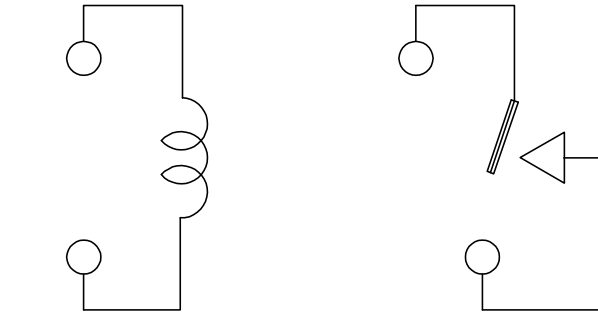
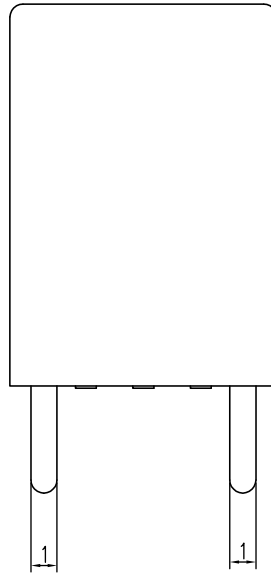
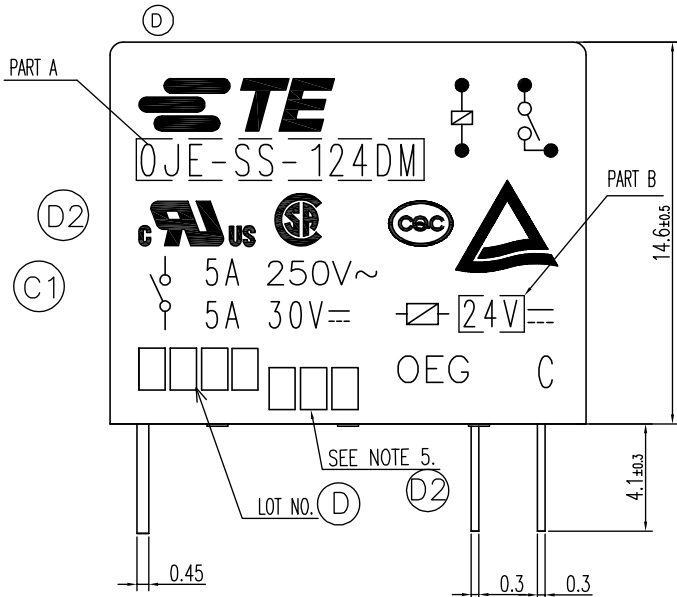


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-		D2	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-001771	21Aug2012	YS.H	BH.Y

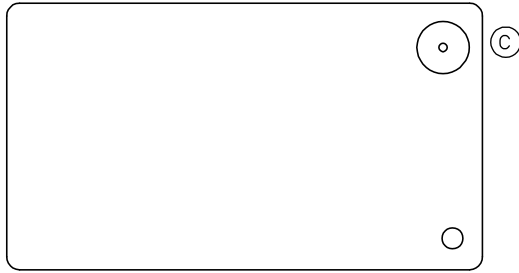

CONNECTION FIGURE


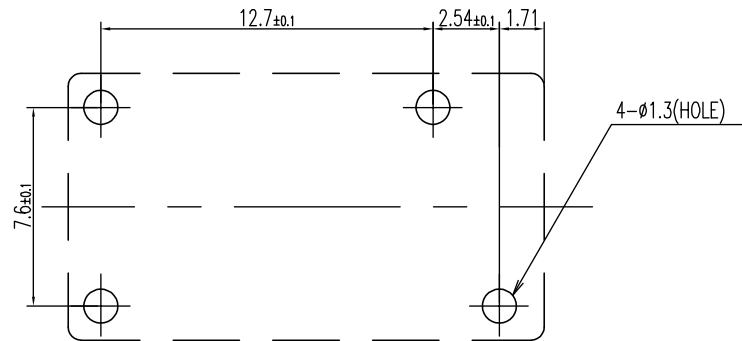


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

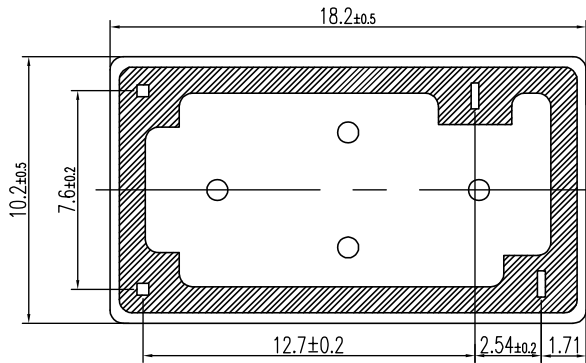

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.Sasaki					
DIMENSIONS: mm		CHK	Y.Oikawa					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.Nagai					
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	-					
MATERIAL	FINISH	APPLICATION SPEC	-		NAME	OJE-SS-DM CUSTOMER DRAWING		
-	-	WEIGHT	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		CUSTOMER DRAWING		A3	00779	G=	1461104	-
-		SCALE		5:1	SHEET		1 of 2	REV
-		-		-		-		D2


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

Ⓣ	PART STATUS	PART NO	TYPE NAME	PRODUCT SPEC	PART B	PART A	TYPE
Ⓣ	OBSOLETE	1461104-3	OJE-SS-148DM	108-79033	48V	OJE-SS-148DM	g
	ACTIVE	6-1419128-2	OJE-SS-124DM	108-79032	24V	OJE-SS-124DM	f
	ACTIVE	4-1419128-2	OJE-SS-112DM	108-79031	12V	OJE-SS-112DM	e
	ACTIVE	3-1419128-3	OJE-SS-109DM	108-79030	9V	OJE-SS-109DM	d
Ⓣ	OBSOLETE	3-1419128-1	OJE-SS-106DM	108-79029	6V	OJE-SS-106DM	c
	ACTIVE	2-1419128-8	OJE-SS-105DM	108-79028	5V	OJE-SS-105DM	b
Ⓣ	OBSOLETE	1461104-1	OJE-SS-103DM	108-79027	3V	OJE-SS-103DM	a

RELAY TYPE

Ⓣ Ⓞ NOTES:  
 1.LOT NO. SYSTEM AS FOLLOWING:



Ⓣ 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

Ⓣ 3.FOR THE TIN-PLATING OF THE PINS:  
 +0.1mm FOR WIDTH,THICKNESS AND DIAMETER.  
 +0.5mm FOR LENGTH.

Ⓣ 4.MARKING FROM INK TO LASER.

Ⓣ 5.ADD LOT NO. SYSTEM AS FOLLOWING;



I, DIGITS FOR DAY OF THE WEEK  
 1...MONDAY IN THIS WEEK;  
 2...TUESDAY IN THIS WEEK;  
 .....  
 7...SUNDAY IN THIS WEEK  
 II, DIGITS FOR SHIFT OF THE DAY  
 1...DAY SHIFT IN THIS DAY;  
 2...NIGHT SHIFT IN THIS DAY;  
 III, ONE CHARACTER

DISTINGUISH THE LINE  
 IDENTITY, SUCH AS: A,B.....Z

		EPOXY RESIN	SEAL	ITEM
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	PBP	NO.TERMINAL	5
	SOLDER DIP	PBS	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	-	
		CHK	H.Sasaki	
		APVD	Y.Oikawa	
DIMENSIONS: mm		PRODUCT SPEC	A.Nagai	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	-	
0 PLC ± -		WEIGHT	-	
1 PLC ± -		CUSTOMER DRAWING	SCALE 5:1 SHEET 2 of 2 REV D2	
2 PLC ± -				
3 PLC ± -				
4 PLC ± -				
ANGLES ± -				
FINISH				
MATERIAL				



OJE-SS-DM CUSTOMER DRAWING

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	G= 1461104	-