
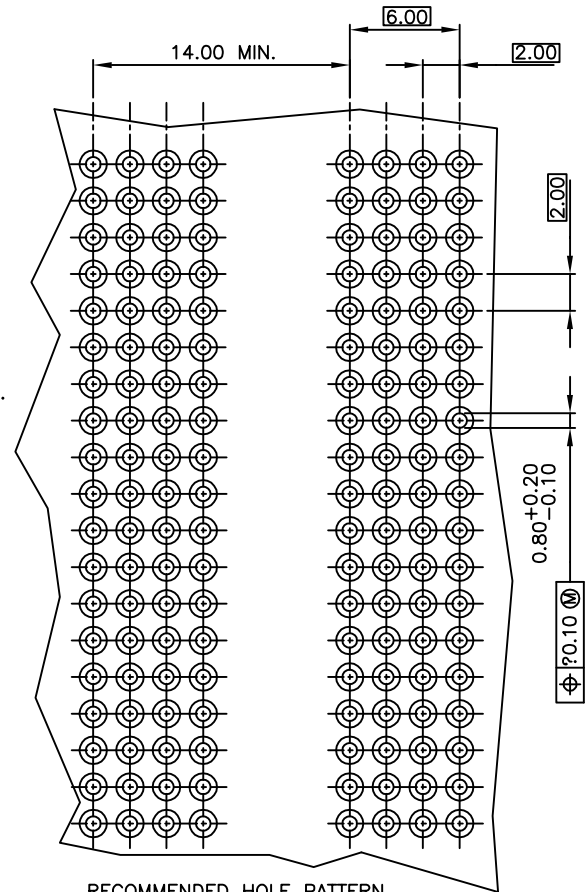
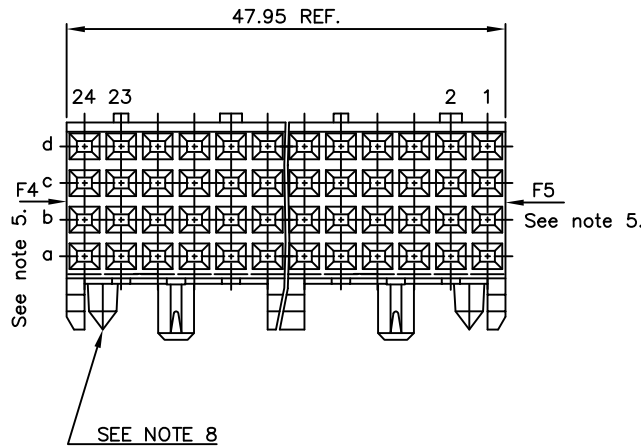



PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88963-X01	5.00 REF.
88963-X11	3.35 REF.
88963-X01LF	5.00 REF.
88963-X11LF	3.35 REF.

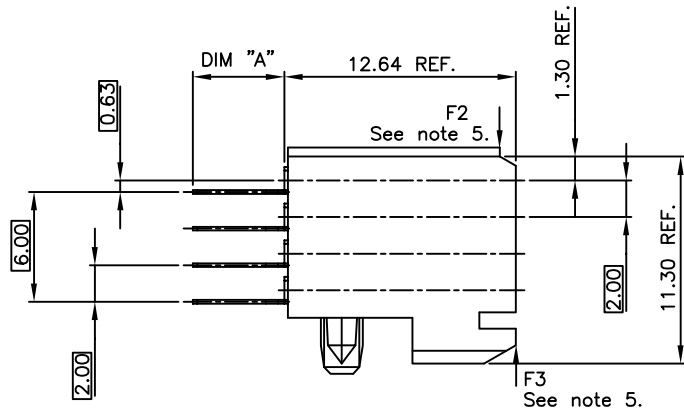

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

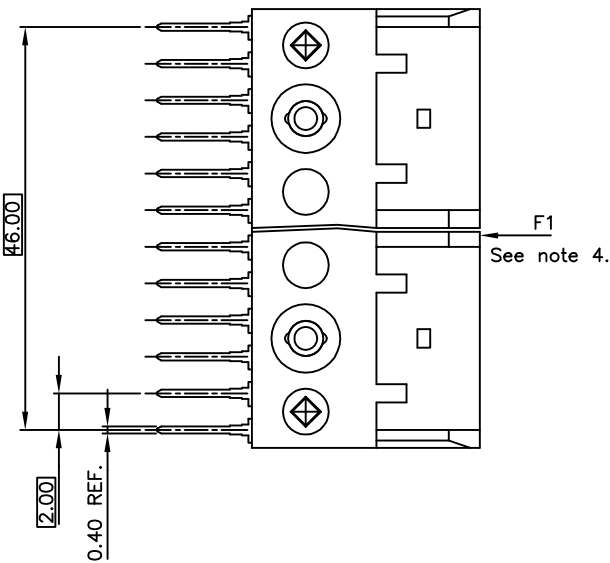

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR PURE FOR Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 50 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY	ELECTRONICS www.fciconnect.com	
H	D008-0171	TER	8/26/08	linear	projection	title STR FEMALE STB SIGNAL 48MM
J	D008-0088	Cent	06/06/06	-	ϕ	product family METRAL (tm)
-	-	-	-	angles	mm	code 213
D	H40355	DOB	940712	dr	H.Bouwknegt	930120
E	V91450	DOB	990827	engr	H.Bouwknegt	931122
F	D005-0468	CLU	051121	chr	J.Wintjes	930121
G	D007-0170	Cent	05/22/07	app	H.Bouwknegt	930121
sheet	revision	J		scale	5:1	size A2
index	sheet	1		dwg no	88963	sheet 1 of 1