


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT 1984


LOC	DIST	P	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14			E	REVISED & REDRAWN PER 0720-0303-93	9-30-93	BB

REVISIONS	
DESCRIPTION	DATE
REVISED & REDRAWN PER 0720-0303-93	9-30-93

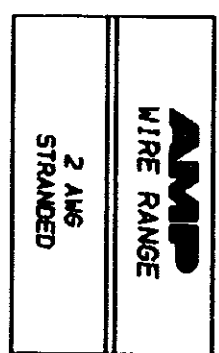

**METRIC**  
DIMENSIONS LISTED IN mm [ INCHES ]

NOTE:  
1. WIRE INSULATION DIA 15.11 [ 0.595 ] MAX

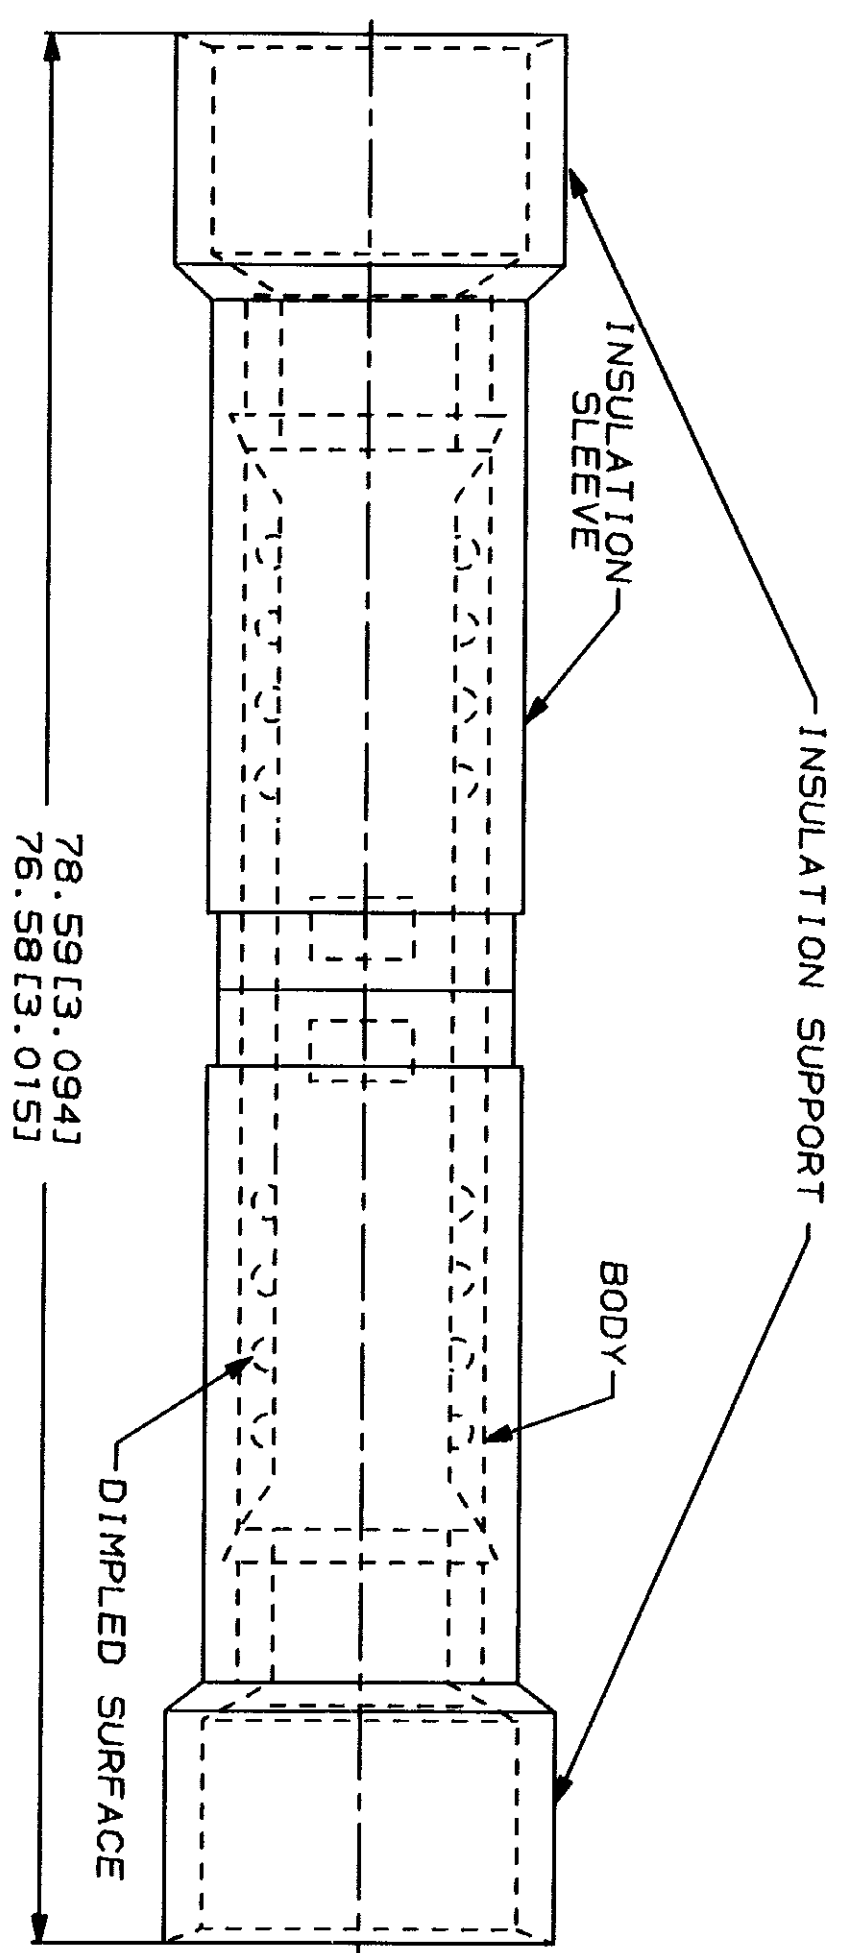

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 6-30-93 S.S. GILLEN		50 QTY		LOOSE PC PACKAGE TYPE		324663 PART NO	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS 1-800-522-6752		VOLTAGE RATING: 600 V MAX		TOLERANCES ON: 2 PLC DEC ± 0.20 (0.008) 3 PLC DEC ± .15 (0.006) ANGLES		CHK 6-30-93 R. HERVEY		APPD 6-30-93 B. BLISS		AMP		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION TOOLING INFORMATION 1-800-722-1111		CIRCULAR MIL AREA: 26,85-42,41mm² [ 52,600-83,700 ]		MATERIAL COPPER PER ASTM B-152 NYLON, COLOR RED		APPD 6-30-93 R. BLISS		PRODUCT SPEC		SPLICE, BUTT, MULTIPLE TO MULTIPLE, TERMINYL, WIRE SIZE: 2 AWG		DRAWING NO 00779 324663	
FOR ORDER ENTRY 1-800-526-5142		STRANDED		FINISH TIN PLATE PER MIL-T-10727		APPLICATION SPEC		WEIGHT		SCALE B NTS		DRAWING NO 324663 1 OF 1	

AMP 1420-15 REV 3-92 10 JAN 1984 16:10:44 AMP10744 <UJ128A>DEPT1132>AMP10744>U. TERMINYL-SPLICE-CUST CUSTOMER DRAWING