



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10⁴ MΩ MIN

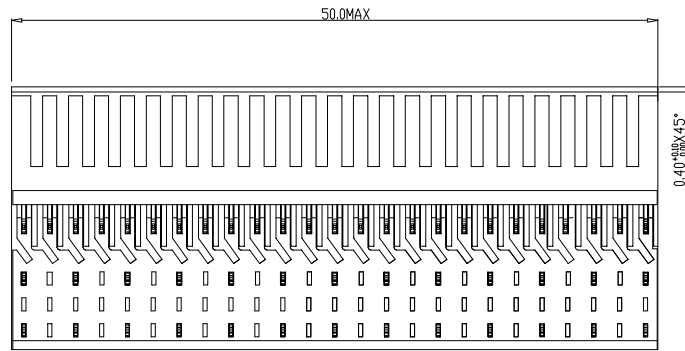

NOTES

1. LEAD FREE INDICATOR :LF=LEAD FREE
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

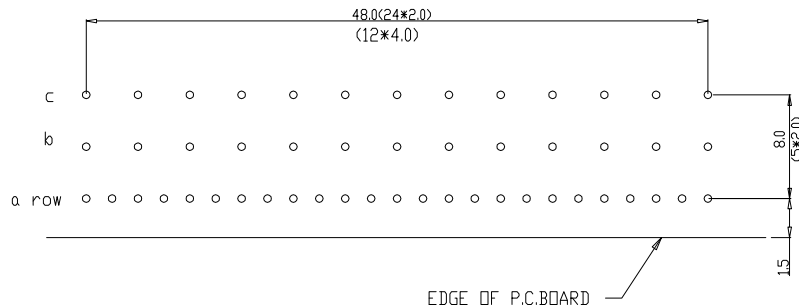

Material		Spec ref	
Mat code	Heatreat	✓	TOLERANCE 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HÖEKEN
Plating/Finish	Dr	10 2 92	J.V.B
Dr	10 2 92	J.V.B	Product family
Chr	Chr	Chr	Model Name
Appr	Appr	Appr	Model Revision
Dr	10 2 92	J.V.B	size
Chr	Chr	Chr	Scale
Appr	Appr	Appr	REL Level
Dr	10 2 92	J.V.B	Product family
Chr	Chr	Chr	Model Name
Appr	Appr	Appr	Model Revision
Dr	10 2 92	J.V.B	size
Chr	Chr	Chr	Scale
Appr	Appr	Appr	REL Level
Dr	10 2 92	J.V.B	Product family
Chr	Chr	Chr	Model Name
Appr	Appr	Appr	Model Revision
Dr	10 2 92	J.V.B	size
Chr	Chr	Chr	Scale
Appr	Appr	Appr	REL Level

rev	ecn no	dr	date
A	CONVERSION REVISION 06	KN	14-9-01
B	105-0093	MINI	17-06-05
C	DG05-0278	keson	02-08-05
D	DG07-0362	keson	05/09/07
E	DG10-0110	NZ	05/30/10
-	-	-	-
06	BEC 9.3546	RM	11-06-01

FCI	MPACS 5+2R RA RCP CONN TYPE B	BS.C .202468.004	Rev. E
Pro/E file	CAT.NO. HM2R02PACA10----	CUSTOMER DRAWING	sheet 1 of 1

This drawing is the property of FCI. It is to be used for manufacturing purposes only. All rights reserved. No part of this drawing may be reproduced without the prior written permission of FCI. Copyright © 2011.