

注記  
NOTES

- △1 CKT.NO.1を基準に偶数番目のソルダーテール。  
EVEN NO. SOLDER TAIL.
- △2 CKT.NO.1を基準に奇数番目のソルダーテール。  
ODD NO. SOLDER TAIL.

3. 材料


MATERIAL

ターミナル:リン青銅、ニッケル下地、錫ビスマスめっき (t=0.32)  
 TERMINAL:PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING.  
 ハウジング:66ナイロン、UL94V-0  
 HOUSING:66NYLON, UL94V-0  
 アクチュエータ:ポリエステル、UL94V-0  
 ACTUATOR:POLYESTER, UL94V-0

4. 本製品は、52030-\*\*10の鉛フリー品である。  
 THIS PRODUCT IS LEAD FREE OF 52030-\*\*10.


35.3	31.2	52030-3029	30
34.3	30.2	52030-2929	29
33.3	29.2	52030-2829	28
32.3	28.2	52030-2729	27
31.3	27.2	52030-2629	26
30.3	26.2	52030-2529	25
29.3	25.2	52030-2429	24
28.3	24.2	52030-2329	23
27.3	23.2	52030-2229	22
26.3	22.2	52030-2129	21
25.3	21.2	52030-2029	20
24.3	20.2	52030-1929	19
23.3	19.2	52030-1829	18
22.3	18.2	52030-1729	17
21.3	17.2	52030-1629	16
20.3	16.2	52030-1529	15
19.3	15.2	52030-1429	14
18.3	14.2	52030-1329	13
17.3	13.2	52030-1229	12
16.3	12.2	52030-1129	11
15.3	11.2	52030-1029	10
14.3	10.2	52030-0929	9
13.3	9.2	52030-0829	8
12.3	8.2	52030-0729	7
11.3	7.2	52030-0629	6
10.3	6.2	52030-0529	5
9.3	5.2	52030-0429	4
8.3	4.2	52030-0329	3
B	A	オーダー番号 ORDER NO.	極数 CKT.

QUALITY SYMBOLS ▽A = 0 ▽E = 0 ▽F = 0 ▼ = 0 ▽C = 0 ⊠ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS <b>MM</b>		SCALE <b>10:1</b>								
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 °		DRWN BY <b>JASANUMA</b>		DATE <b>2015/12/01</b>						<b>1.0 FPC CONN ZIF (ST)</b>		
	4 PLACES ± 0.2 3 PLACES ± 0.2 2 PLACES ± 0.2 1 PLACE ± 0.25 0 PLACES ± 0.3		CHK'D BY <b>KTAKAHASHI</b>		DATE <b>2015/12/08</b>		<b>PRODUCT CUSTOMER DRAWING</b>						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR BY <b>YNOGAWA</b>		DATE <b>2015/12/09</b>						SERIES <b>52030</b>		MATERIAL NUMBER <b>SEE CHART</b>
EC NO: 102046 DRWN: JASANUMA CHK'D: KTAKAHASHI APPR: YNOGAWA		A3		THIRD ANGLE PROJECTION		DOCUMENT NUMBER <b>520301000</b>		DOC TYPE <b>PSD</b>		DOC PART <b>000</b>		SHEET NUMBER <b>1 OF 2</b>	

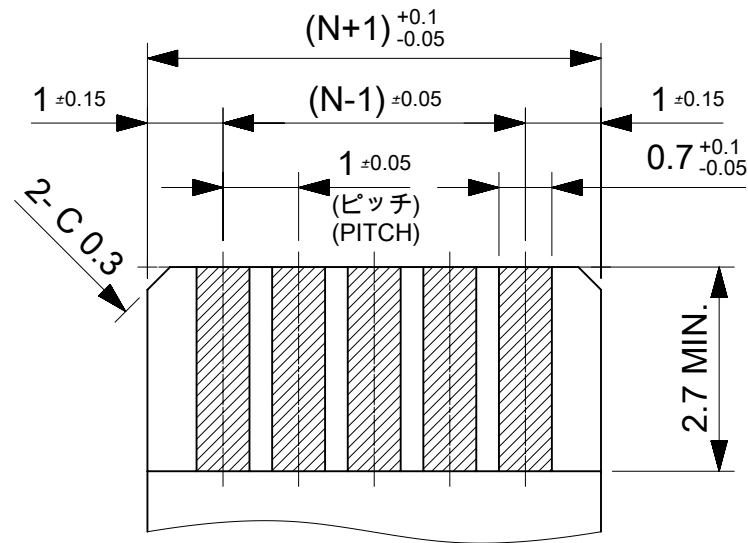

(仕上がり厚さ:0.3±0.05)  
(THICKNESS:0.3±0.05)

適合FPC推奨寸法  
APPLICABLE FPC RECOMMENDED DIM.

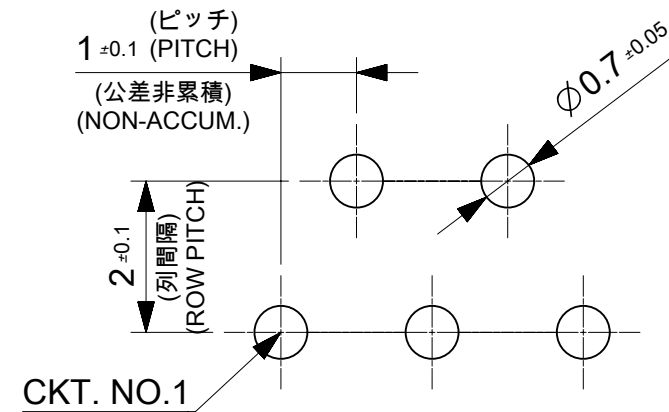

基板取付穴推奨寸法(t=1.6)  
RECOMMENDED P.C.BOARD HOLE DIM.(t=1.6)  
(マウント面)  
(MOUNT SURFACE)

FPCについて:

打ち抜き方向は、導体側から補強板側を推奨致します。  
補強フィルム材質は、ポリイミドを推奨致します。  
接着剤は、熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.  
RECOMMENDED MATERIAL:  
STIFFENER FILM: POLYIMIDE  
BONDING AGENT: THEROSETTING BONDING AGENT

<b>QUALITY SYMBOLS</b> ▽A = 0 ▽E = 0 ▽F = 0 ▼ = 0 ▽C = 0 ⊠ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	EC NO: 102046 DRWN: JASANUMA CHK'D: KTAKAHASHI APPR: YNOGAWA	2015/12/01 2015/12/08 2015/12/09	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE				
			ANGULAR TOL ± 3.0 °		MM	1:1				
			4 PLACES ± 0.2	3 PLACES ± 0.2	DRWN BY	DATE	1.0 FPC CONN ZIF (ST)			
			2 PLACES ± 0.2	1 PLACE ± 0.25	JASANUMA	2015/12/01				
			0 PLACES ± 0.3	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			
			KTAKAHASHI	2015/12/08						
			APPR BY	DATE	SERIES	MATERIAL NUMBER	CUSTOMER			
			YNOGAWA	2015/12/09	52030	SEE CHART	GENERAL			
			DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	
		A3		520301000		PSD	000	2 OF 2		