



Toner Cartridge Bag

The Toner Cartridge Bag is an opaque construction that provides moisture barrier protection. This bag features a tough polyester outer layer, an aluminum layer for moisture protection, and a heat sealable black polyethylene. Open Top and ZipTop reclosable styles are available.

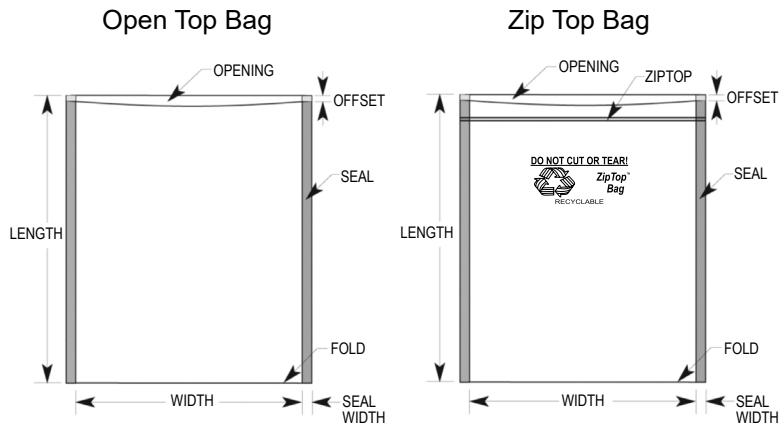

Tolerance: Width -0, +1/4"
 Length +/- 1/8" Offset 0 to 1/4"
 Seal width 3/8" with a tolerance of +/- 1/8"

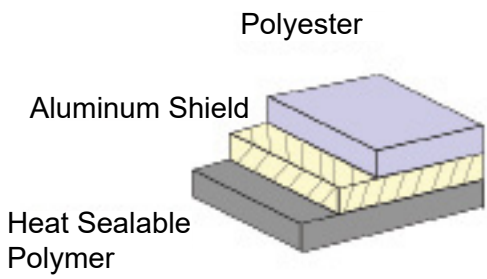

Physical	Typical Value	Testing Method
Moisture Vapor Transmission Rate (MVTR)	< 0.05 grams/100 sq. in./24 hrs.*	MIL-STD-3010C Method 3030
Tensile Strength	6000 PSI, 41 MPa	ASTM D882
Puncture Resistance	13 lbs, 58 N	MIL-STD-3010 Method 2065
Seal Strength	11 lbs, 49 N	ASTM D882
Thickness	1.9 mils, 0.05 mm +/-15%	MIL-STD-3010 Method 1003
Heat Sealing Conditions		Typical Value
Temperature	250°F – 400°F, 121°C – 190°C	
Time	0.5 – 3.0 seconds	
Pressure	30 – 60 PSI, 206 – 414 KPa	

*Standard deviation of 0.007 grams/100 sq. in./24 hrs.

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

RoHS 2, REACH, and Conflict Minerals Statement
 None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Specifications and procedures subject to change without notice.



TONER CARTRIDGE BAG		
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	DRAWING NUMBER TONER CARTRIDGE BAGS	DATE March 2016