

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

1. MATERIAL: HOUSING: GLASS FILED THERMO PLASTIC POLYESTER(94V-0), COLOR: BLACK
 CONTACT: COPPER ALLOY
 RETENTION LEG: PRE-TIN COPPER ALLOY

REVISONS		DATE	DWN	APVD
P	LTR	DESCRIPTION		
B		REVISED	14JUL2010	HMR TM
C		REVISED	17DEC2012	H.M N.Y

1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂(94V-0)、色:黒
 コンタクト:銅合金
 リテンションレグ:錫めっき済銅合金

2. めっき:全面:ニッケル下地めっき1.27μm以上

3. めっき:接触部 2の上に金めっき0.38μm以上

4. めっき:コンタクト半田付部: 2の上に錫めっき2μm以上

5. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。

6. Y KEY形状は、X KEY形状と左右対称



2. FINISH(ALL OVER): NICKEL PL. 1.27μmMIN

3. FINISH(CONTACT AREA): GOLD PL. 0.38μmMIN AFTER 2

4. FINISH(CONTACT TAIL): TIN PL. 2μmMIN AFTER 2



5. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.

6. THE KEYING ARRANGEMENT OF "Y" IS SYMMETRIC WITH "X".

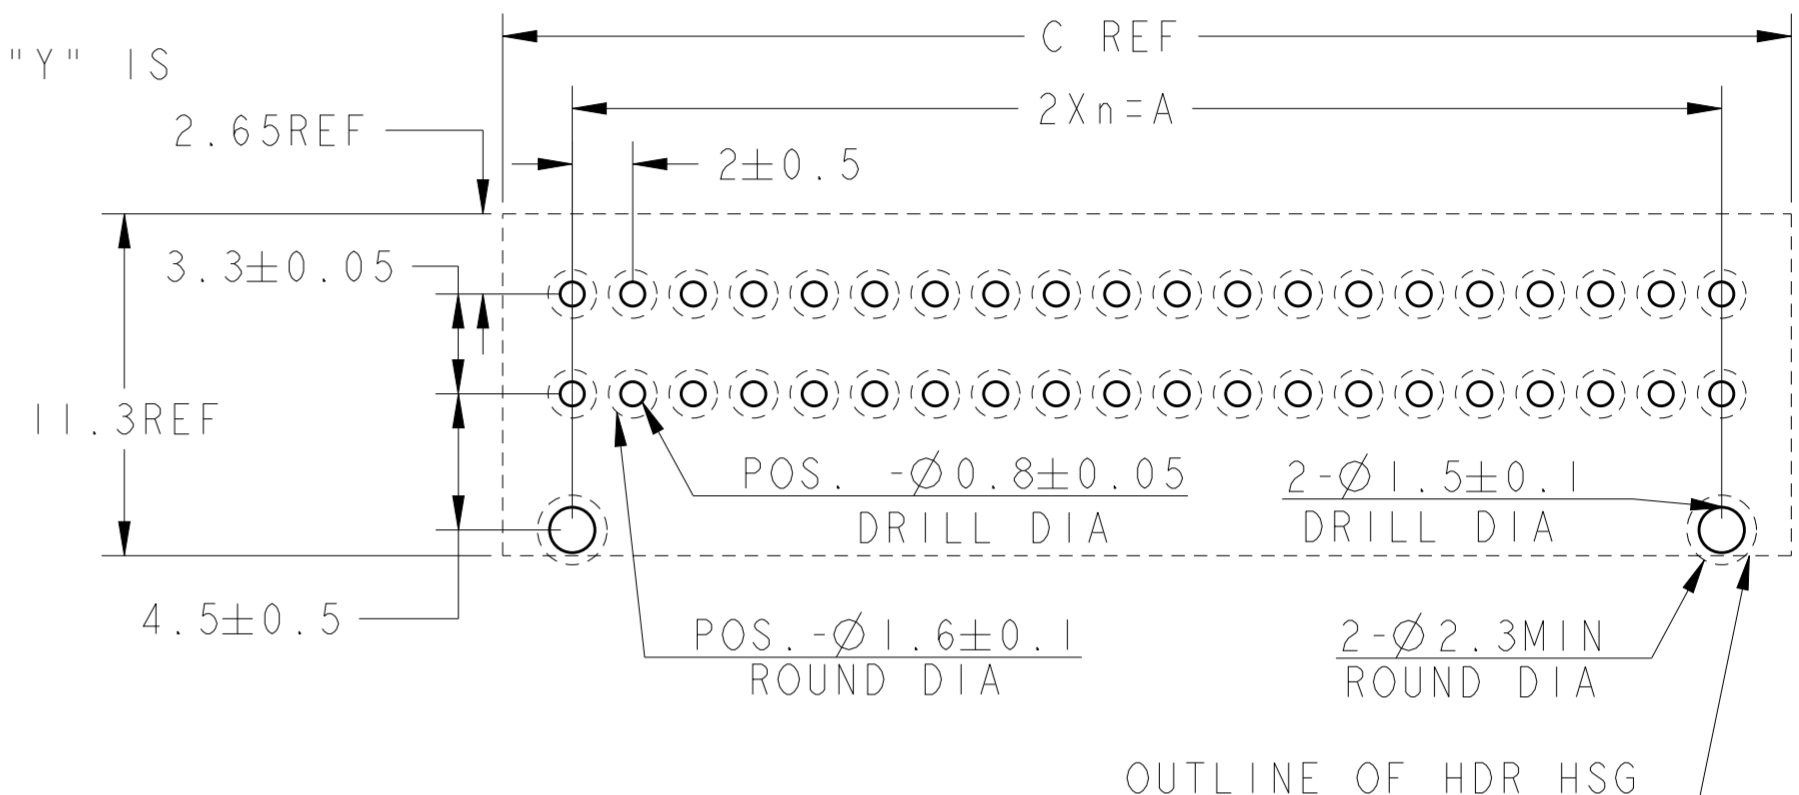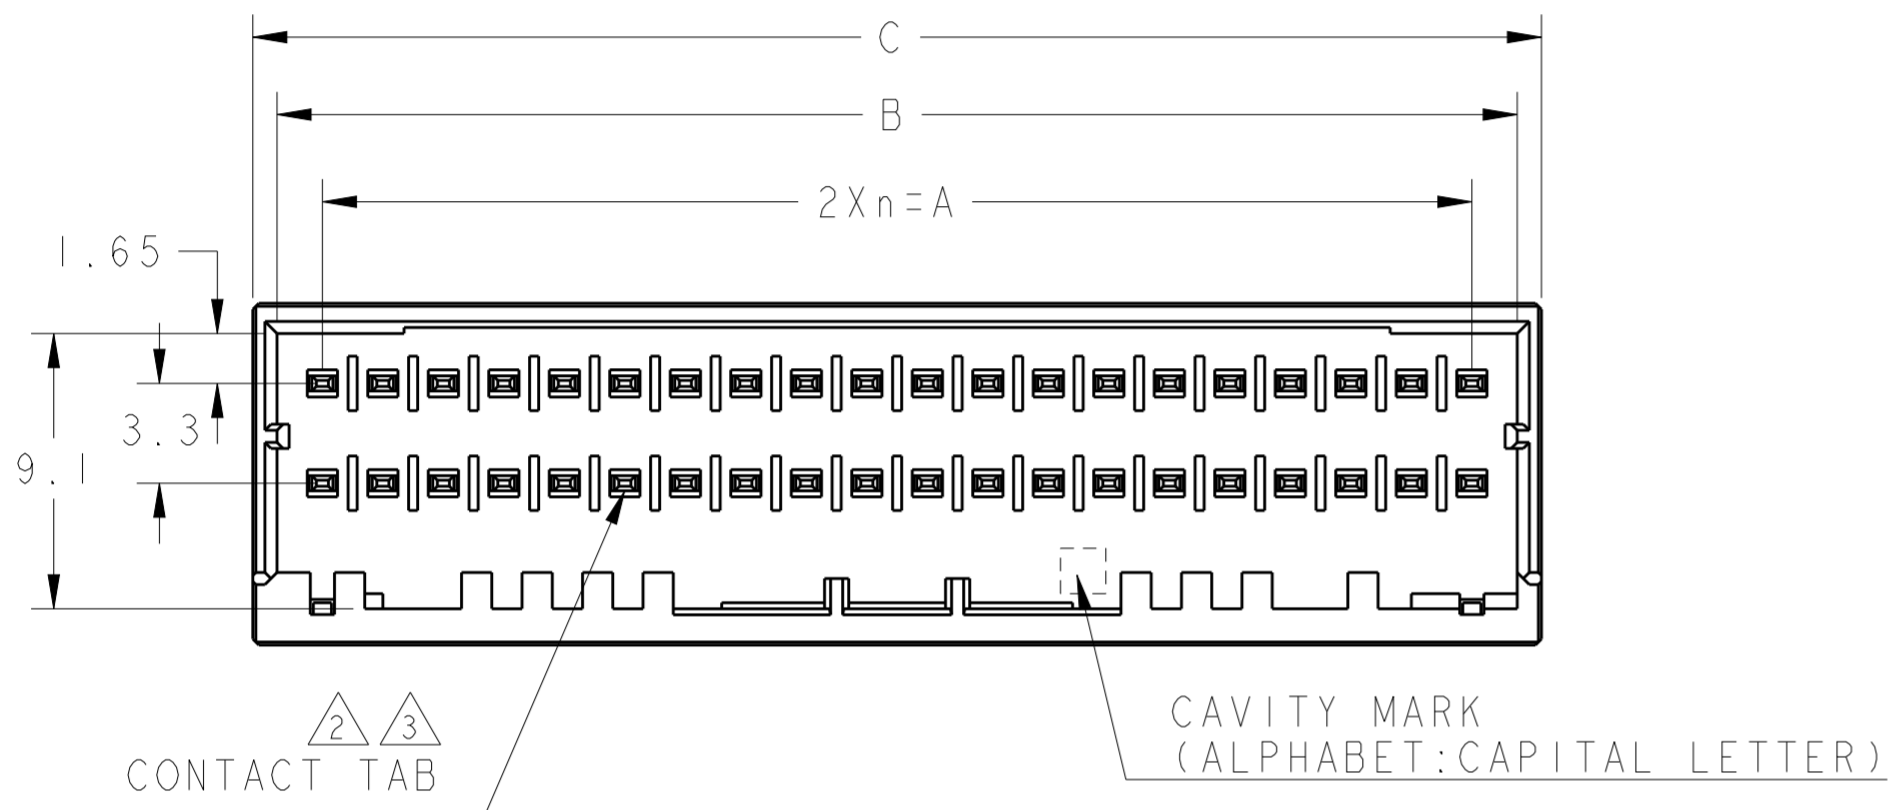

RECOMMEND PC BOARD HOLE PATTERN
 : CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
 PC BOARD THICKNESS : 1.0~1.6±0.1

推奨基板取付穴寸法: コネクタ搭載面 (非累積公差)
 PC基板厚: 1.0~1.6±0.1

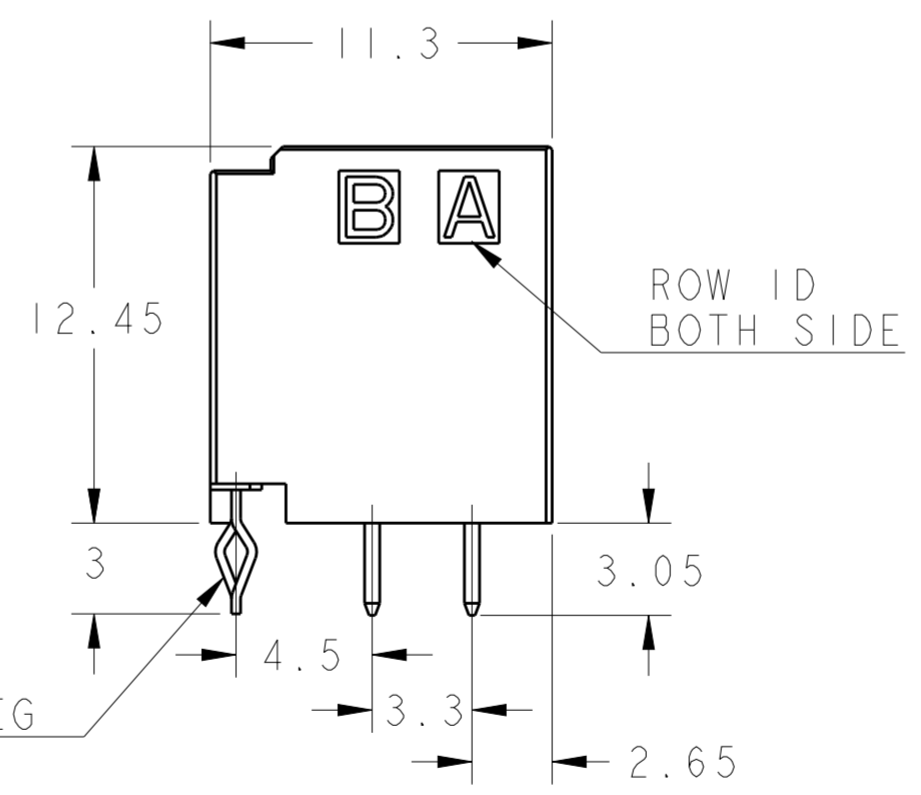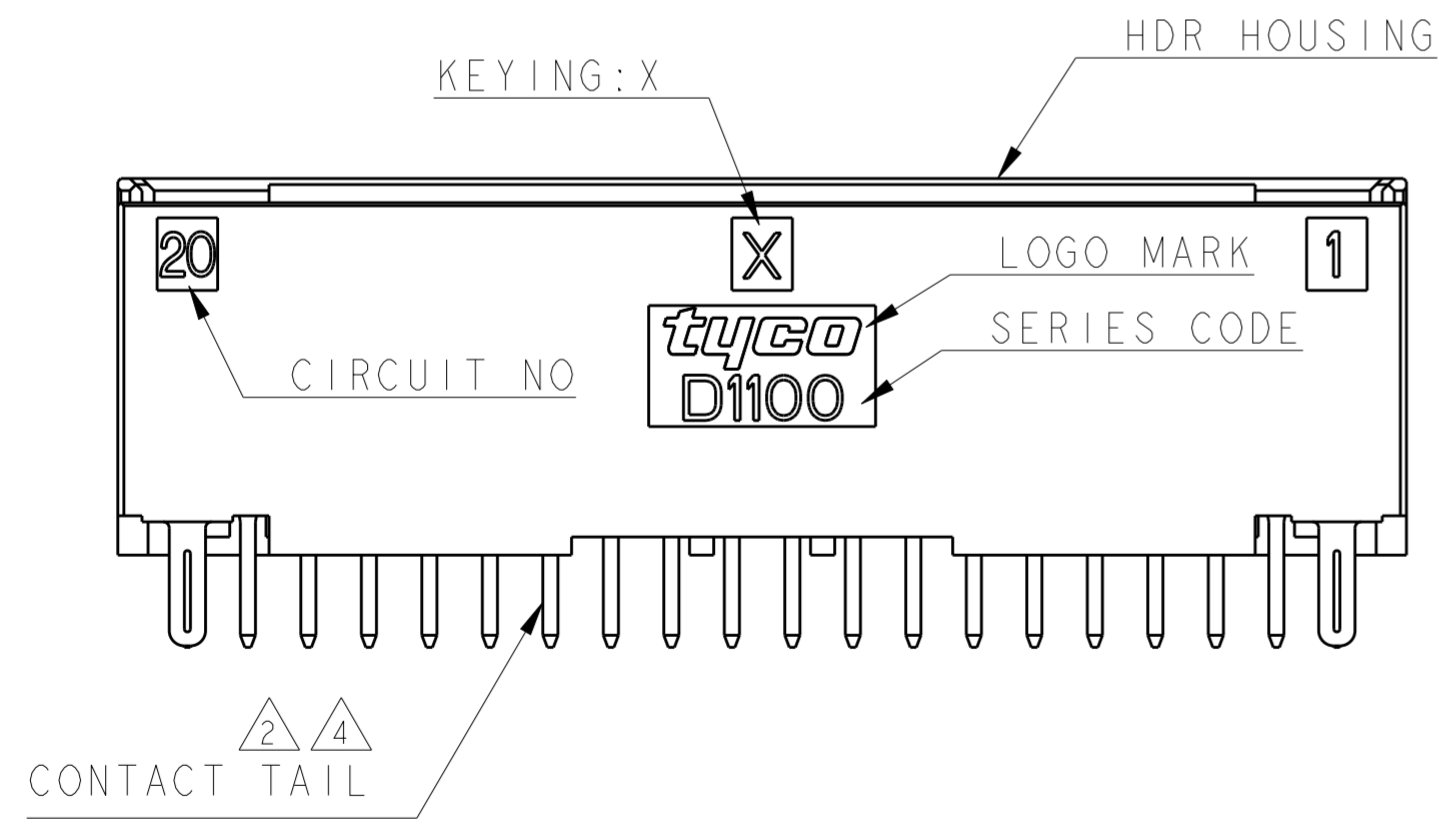

40	Y	19	38.0	41.0	42.6	2-1827872-0
40	X	19	38.0	41.0	42.6	1-1827872-0
34	Y	16	32.0	35.0	36.6	2-1827872-7
34	X	16	32.0	35.0	36.6	1-1827872-7
32	X	15	30.0	33.0	34.6	1-1827872-6
30	X	14	28.0	31.0	32.6	1-1827872-5
28	X	13	26.0	29.0	30.6	1-1827872-4
26	X	12	24.0	27.0	28.6	1-1827872-3
22	X	10	20.0	23.0	24.6	1-1827872-1
POS	KEY	n	A	B	C	PART NO

40POS(X-KEY): 1-1827872-0

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 桁 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 一般公差 ±0.3, ±3°
 0-PLC ±0.1
 1-PLC ±0.1
 2-PLC ±0.01
 3-PLC ±0.001
 4-PLC ±0.0001
 ANGLES ±
 FINISH 仕上

OTHERWISE SPECIFIED:
 1-PLC ±0.1
 2-PLC ±0.01
 3-PLC ±0.001
 4-PLC ±0.0001
 ANGLES ±
 FINISH 仕上

APVD: T. KUDO 16MAR2005
 CHK: D. MITSUGI 23AUG2005
 APVD: D. MITSUGI 23AUG2005

PRODUCT SPEC: 108-78268
 APPLICATION SPEC: 114-5377

MATERIAL: 材料

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET 1 OF 3

REV C










STE TE Connectivity

NAME: DYNAMIC D1100D 2.0mm PITCH HDR ASSY (V-TYPE) 22-40POS

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 1827872 RESTRICTED TO: -

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC				DIST				REVISIONS			
P	LTR	DATE	DWN	APVD	DESCRIPTION						
J	-				SEE SHEET 1 OF 3						

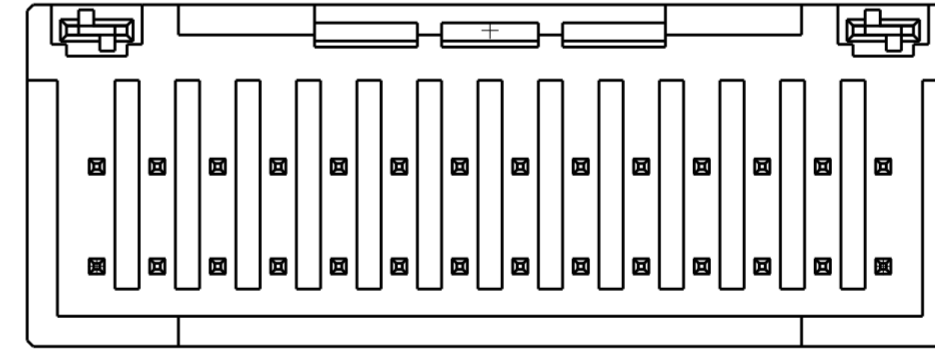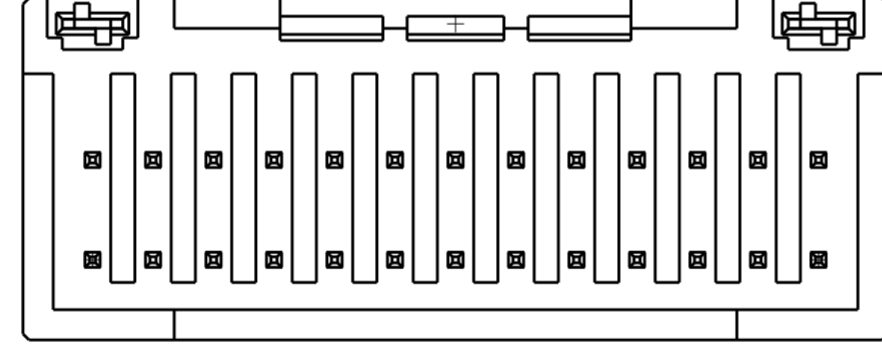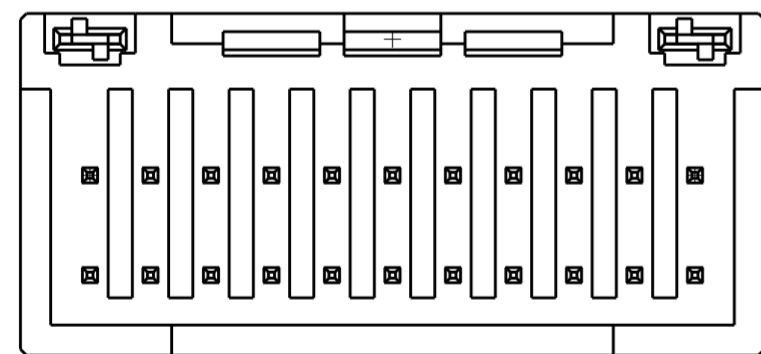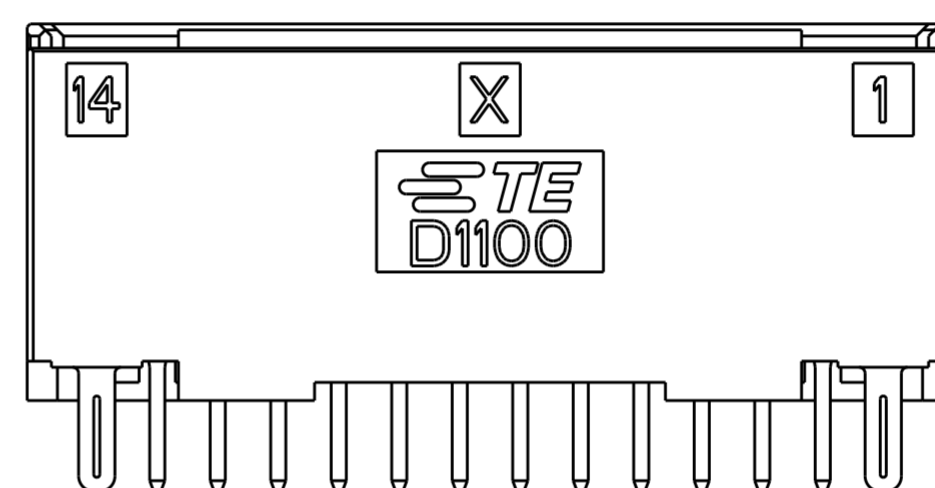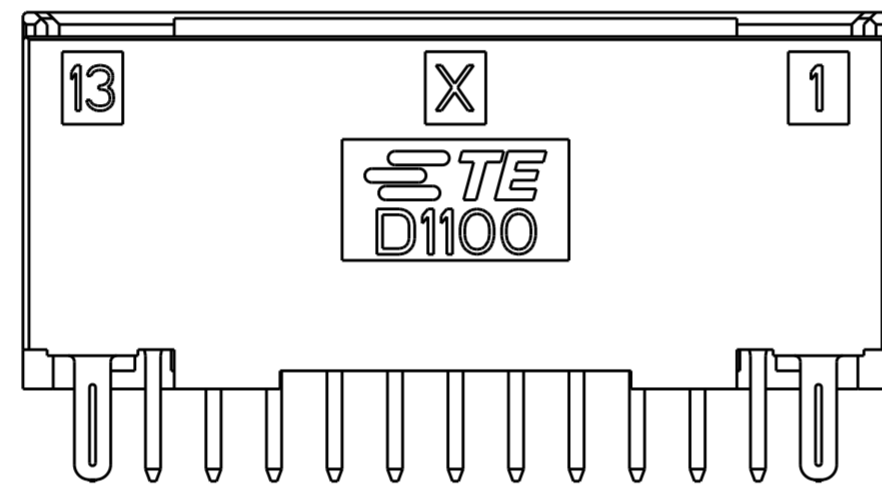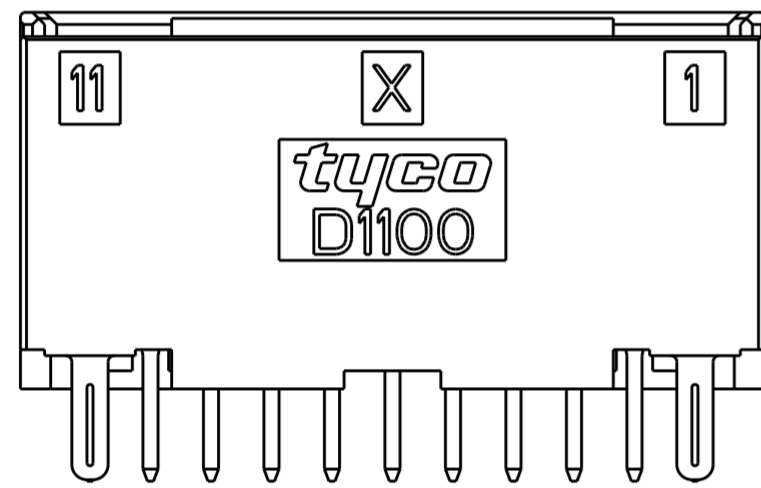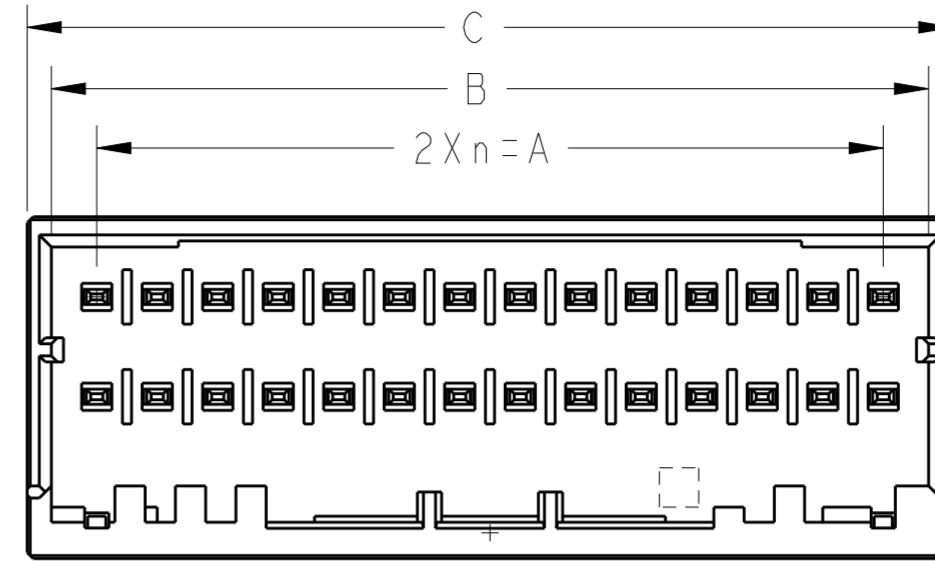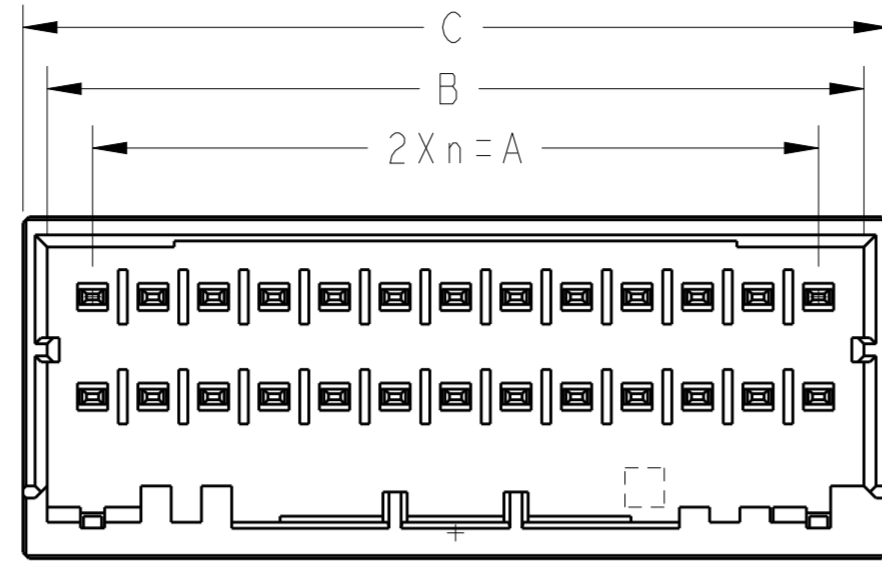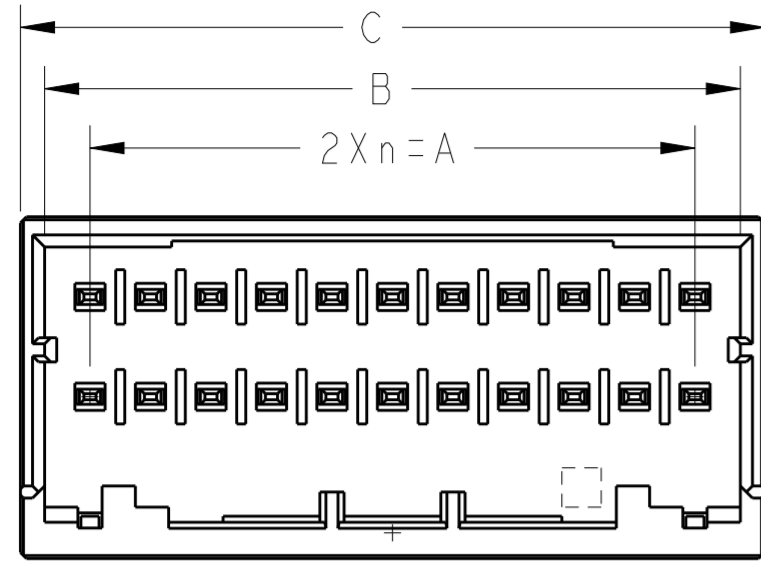

22POS(X-KEY):1-1827872-1







26POS(X-KEY):1-1827872-3

28POS(X-KEY):1-1827872-4

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN T. KUDO 16MAR2005	TE Connectivity	
DIMENSIONS: mm		CHK D. MITSUGI 23AUG2005		
TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:		APVD D. MITSUGI 23AUG2005	NAME DYNAMIC D1100D 2.0mmPITCH HDR ASSY (V-TYPE) 22-40POS	
1 PLC ± 2 PLC ±0.1 3 PLC ±0.01 4 PLC ±0.001 ANGLES ± FINISH		PRODUCT SPEC 108-78268	SIZE A200779	
MATERIAL		APPLICATION SPEC 114-5377	DRAWING NO C-1827872	
		WEIGHT -	RESTRICTED TO -	
		CUSTOMER DRAWING	SCALE 4:1 SHEET 2 OF 3 REV C	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DATE	DWN	APVD	DESCRIPTION		
J	-				SEE SHEET 1 OF 3		

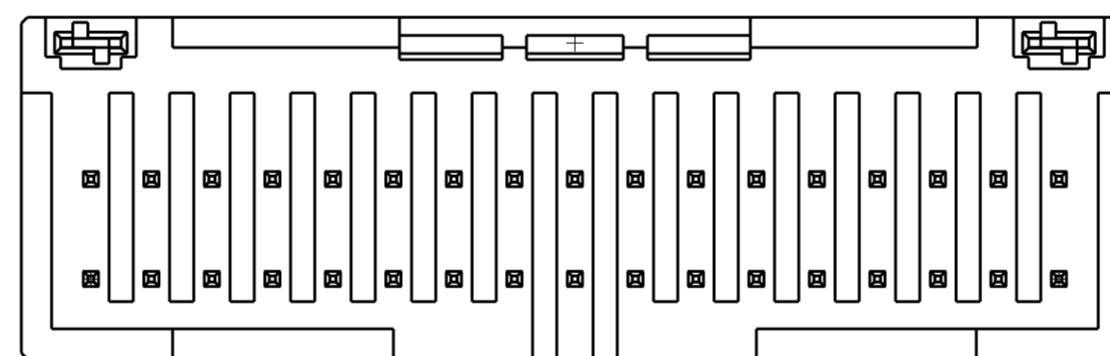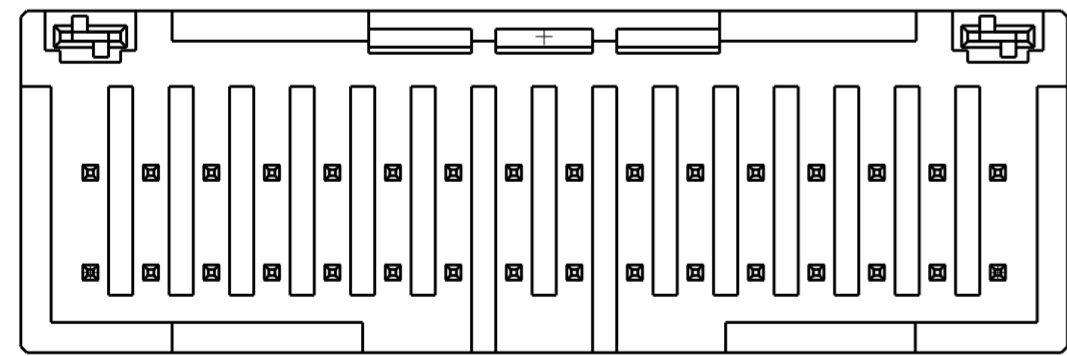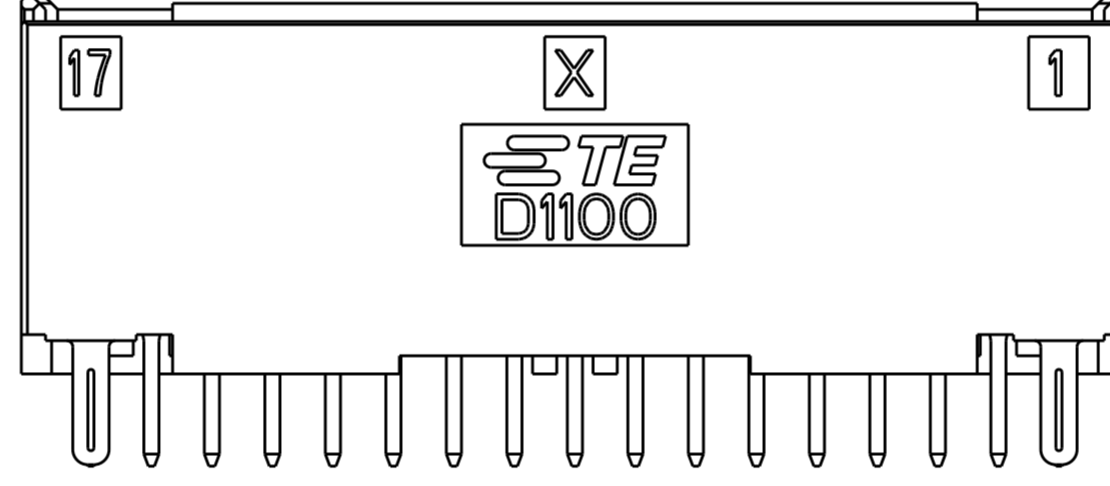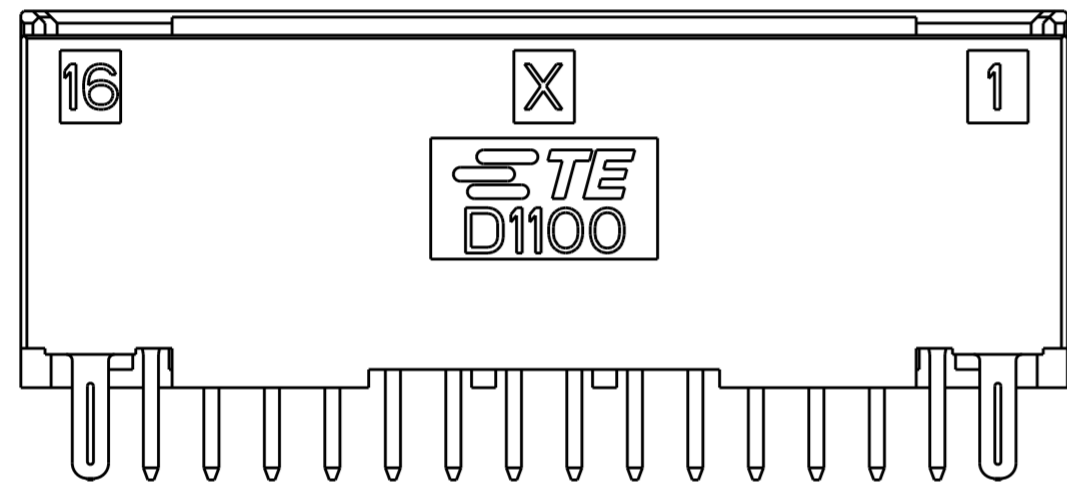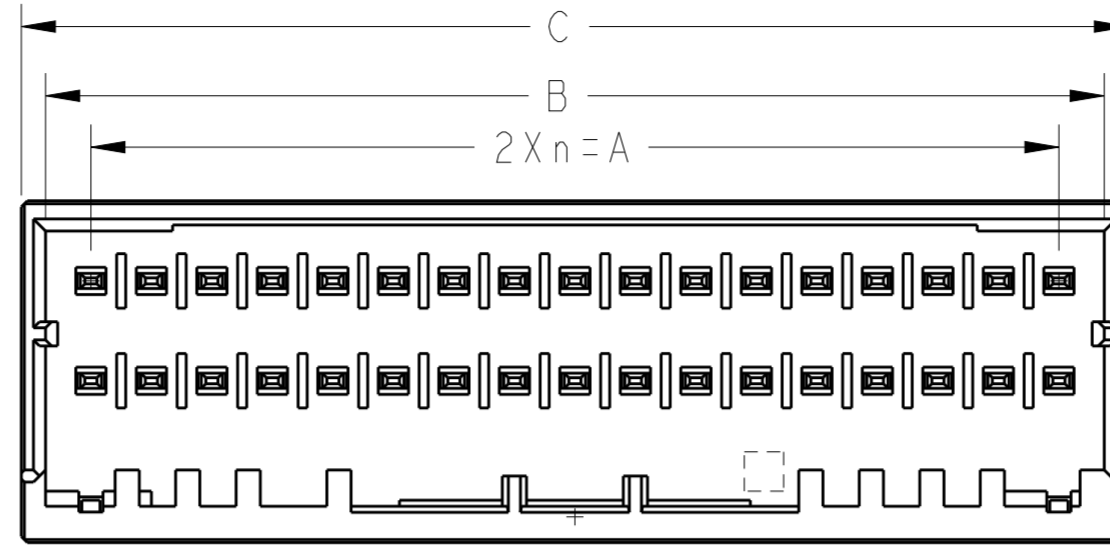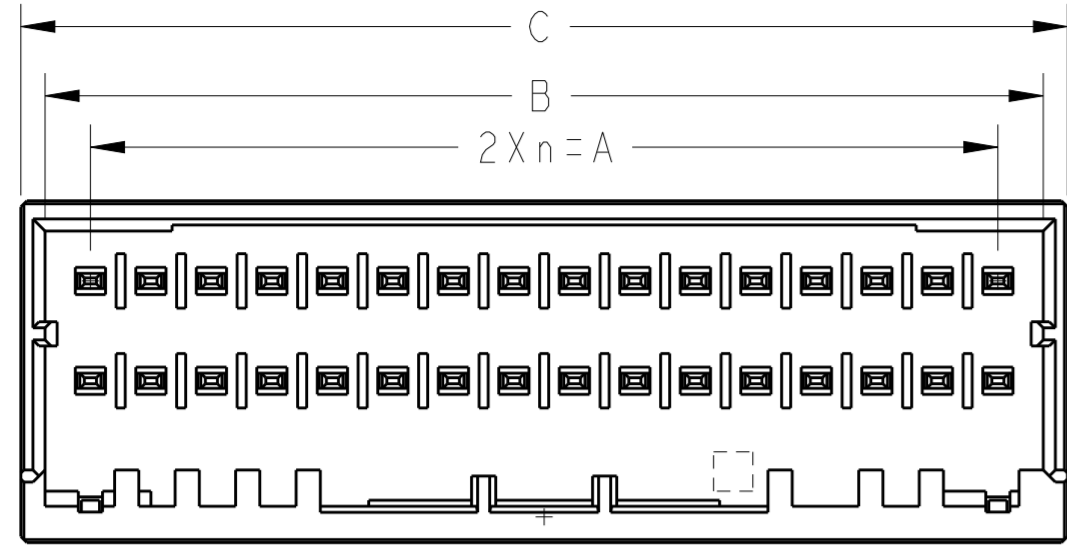

32POS(X-KEY):1-1827872-6

34POS(X-KEY):1-1827872-7

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN T. KUDO 16MAR2005	STE TE Connectivity	
DIMENSIONS: mm		CHK D. MITSUGI 23AUG2005		
MATERIAL		APVD D. MITSUGI 23AUG2005	NAME DYNAMIC D1100D 2.0mmPITCH HDR ASSY (V-TYPE) 22-40POS	
TO CHANGES UNLESS OTHERWISE SPECIFIED: 1. PLC ±- 2. PLC ±0.1 3. PLC ±0.01 4. PLC ±0.001 ANGLES ±- FINISH		PRODUCT SPEC 108-78268	RESTRICTED TO	
SEE SHEET 1 OF 3		APPLICATION SPEC 114-5377	SIZE A200779	DRAWING NO C-1827872
CUSTOMER DRAWING		WEIGHT -	SCALE 4:1	SHEET 3 OF 3