

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

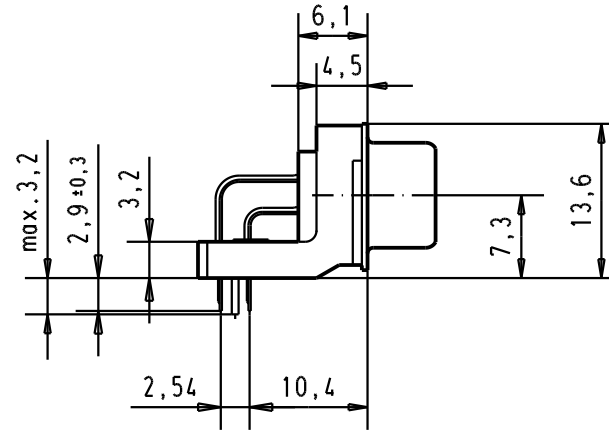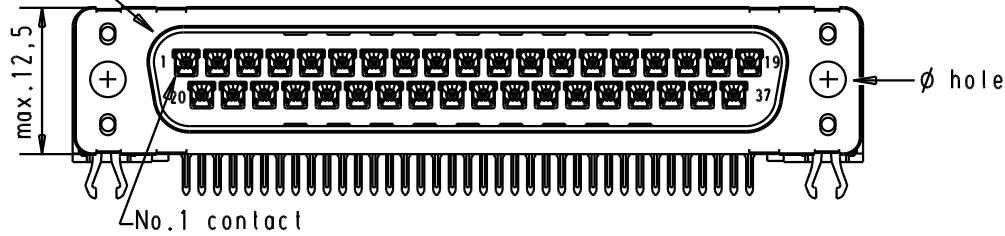

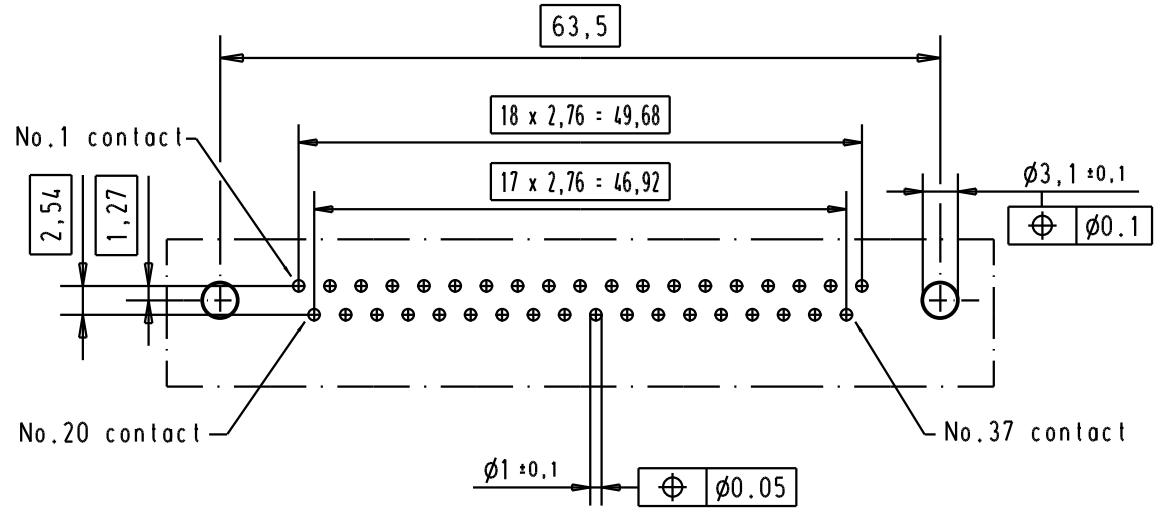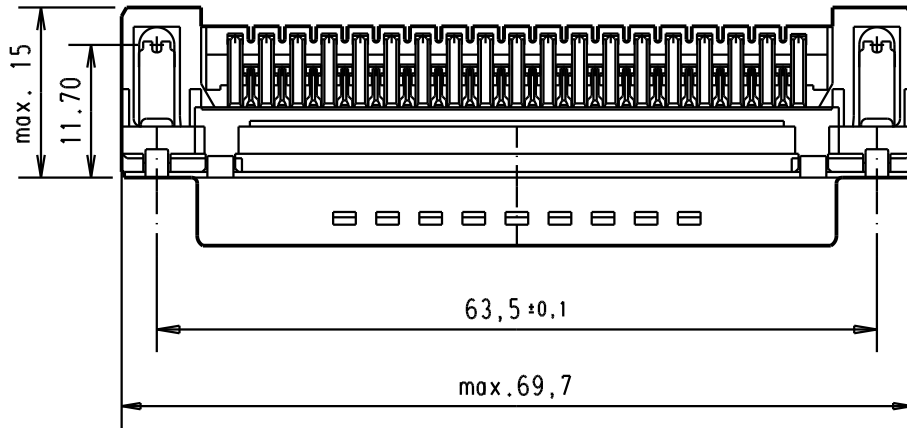

PCB layout hole component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

| | | | | | | Det. | Name |  <p>All Dim. in mm Orig. Size DIN A 4</p> | D-Sub, male, standard angle, 37 poles, with solder pin, hole and grounding board lock. | Moßstab/ Scale | |
|----------------|-----------|-------------------|-------|-----------|---------|---|-----------|--|--|-------------------|-------|
| | | | | | | Detail. | 15/dec/00 | | | ALSPACE | 1.5:1 |
| | | | | | | Insp. | | | | | |
| 09 65 462 3810 | 3.1 ± 0.1 | 1 | 31084 | 22/04/04 | JH | Stand. | | | Blatt/ Page 4 | | |
| 09 65 462 6810 | 3.1 ± 0.1 | 2 | 29689 | 03/07/01 | AA | HARTING EURL F-95972 Paris | | | | | |
| 09 65 462 7810 | 3.1 ± 0.1 | 3 | 27960 | 15/dec/00 | ALSPACE | | | | | | |
| Part number | ∅ hole | Performance level | Mod. | Det. | Name |  | | | Sub. | | |
| TB 0965462x81x | | | | | | | | | | | |