

0.126 ±0.002 [3.2 ±0.050] #3 #4 0.098 ±0.002 [2.5 ±0.05] #2 #1 0.033 ±0.002 [0.85 ±0.05] 0.083 2.1 #1 #2 0.031 ±0.004 [0.8 ±0.1] 0.035 CO .25 #4 0.035 ±0.002 #3 0.9 ±0.05


Recommended Land Pattern

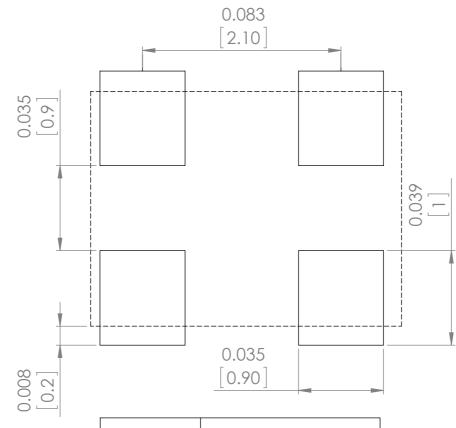

No	Pin Terminal		
1	Standby		
2	GND		
3	Output		
4	VDD		

Note: Recommend using an approximately 0.01 uF bypass capacitor between PIN 2 and 4.

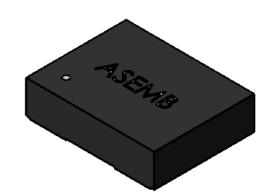

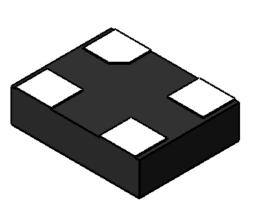

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				DEBUR AND BREAK SHARP	DO NOT SCALE DRAWING REVISION						
					EDGES	ABRACON					
	NAME	SIGNATU	RE DATE						ORPORAT	ION	
DRAWN	SAAZVAT						30332 Esperanza, Rancho Santa margarita, California 92688				
CHK'D	XXXXXX										
APPV'D							Oscillator				
MFG								Jsciliaro	I		
Q.A				MATERIAL	:		ASEMB			А3	
					1		ASLIVID				
				WEIGHT:			SCALE:25:1	SHEET	1 OF 1		