

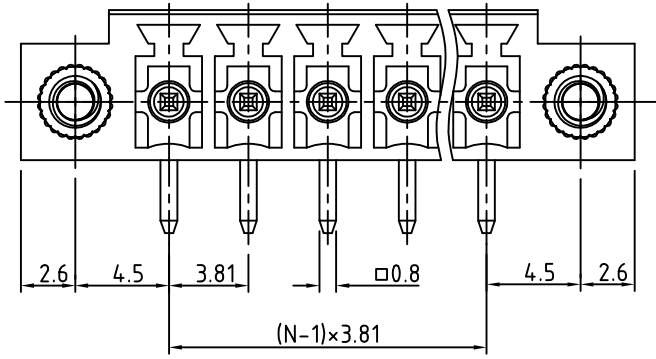


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

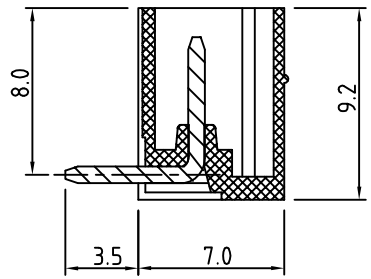

- Material**
- Terminal body  
(contact pin): Brass(CuZn) Tin plated
  - Flange screw nut: Brass M2.5
  - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical cULus/CSA/VDE**
- Voltage rating: 300VAC/125VAC/125VAC
  - Current rating: 10A/8A/10.5A
  - Withstanding Voltage: 1.6KV/1.6KV/2.5KV
  - Operating temperature: -30°C to +105°C
  - Soldering temperature: 250°C±10°C/5 Sec
  - Safety Approval:

RoHS Compliant

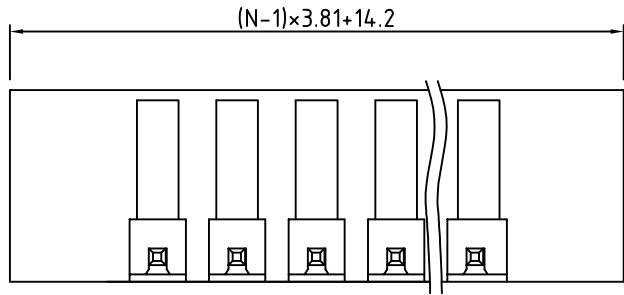


N=Number of poles

PART NUMBER:

**OSTOQXX3551**

- No. of Poles
- 02: 2 Poles
  - :
  - 24: 24 Poles
- COLOR
- 0: Black
  - 5: Green (Standard)
  - 6: Blue
  - 8: Grey

P.C.B LAYOUT

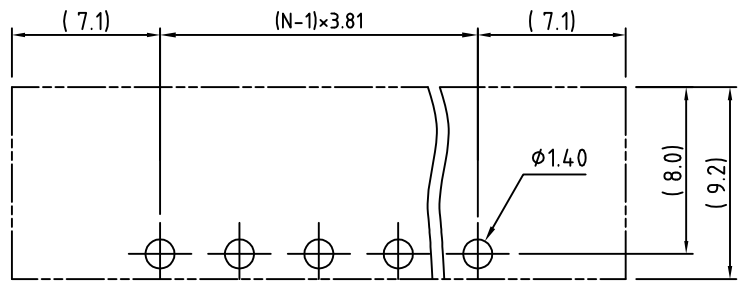

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTOQ 3.81mm series w/flange right-angle 2p-24p				
PART NO.	OSTOQXX3551	DWG NO.	OSTOQXX3551.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.10.31	Marvin 2006.10.31	Marvin 2006.10.31	Marvin 2006.10.31		UNIT: mm	X. ±0.50
				SHEET: 01/01	SCALE: NONE	X.X ±0.30
					REV.: G	X.XX ±0.10
						X° ±1°