


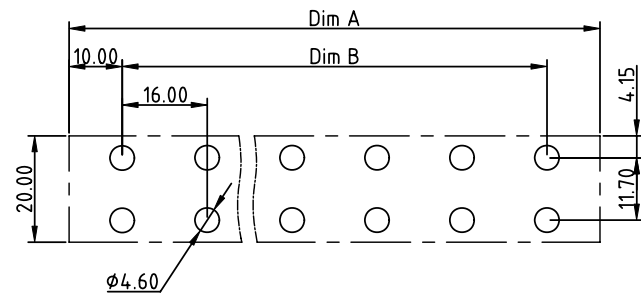
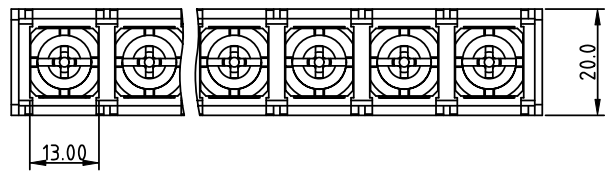
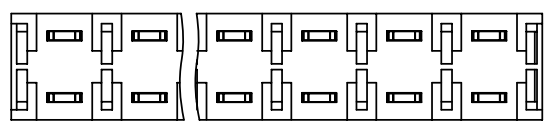




PRODUCT NUMBER	PITCH
YK902xx0x0JOG	16.00mm

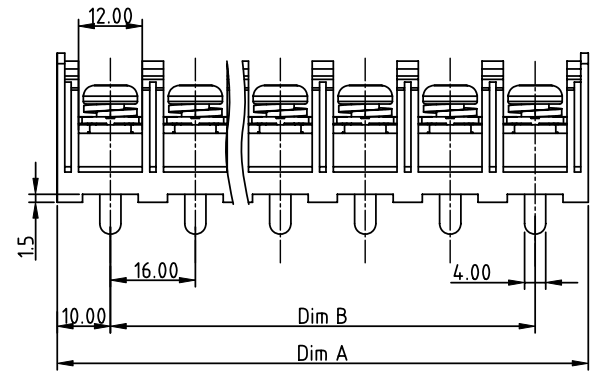

RECOMMENDED P.C.B LAYOUT  
TOP VIEW



**MATERIALS & ELECTRICAL**

**RATED VOLTAGE & CURRENT:** 600 V, 65A

**WITHSTAND VOLTAGE:** AC 3000 V/Min

**INSULATION RESISTANCE:** 1000 MΩ OR MORE AT DC 500 V

**OPERATING TEMPERATURE RANG:** -40 °C ~ +115°C

**SCREW TORQUE VALUE:** 26 Lb-In.

**WIRE RANGE:** 10 - 6 AWG

1) HOUSING: THERMOPLASTICS, UL94-V0 BLACK

2) TERMINAL: BRASS, 1.6t

3) TERMINAL SCREWS WITH WASHER: STEEL, M6.0

4) TERMINAL NUT: STEEL, M6.0, NICKEL PLATED

APPROVAL: US


DIMENSION

Dim A	N×16.0+4.0
Dim B	(N-1)×16.0

N=Number of poles

Poles	Tolerance
2p-6p	±0.40
7p-10p	±0.50

PART NO.: YK 902xx 0 x 0 JOG

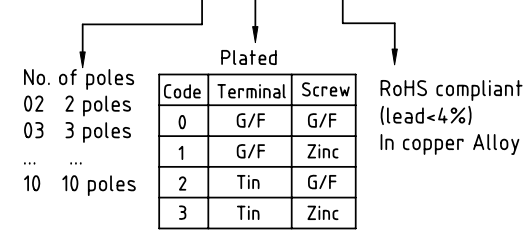

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles $\phi$ E	BARRIER TYPE
				X*±1"	scale
				dr EVAN LU 061114	sheet 1 of 1 size
				enr EVAN LU 061114	YK902xx0x0JOG A4
				chr HANKE FENG 061114	type CUSTOMER Drawing
				appd SHI JUN 061114	
sheet index	revision sheet	A	1		