NUMBER 179553

(3rd ANGLE PROJECTION)

METRIC

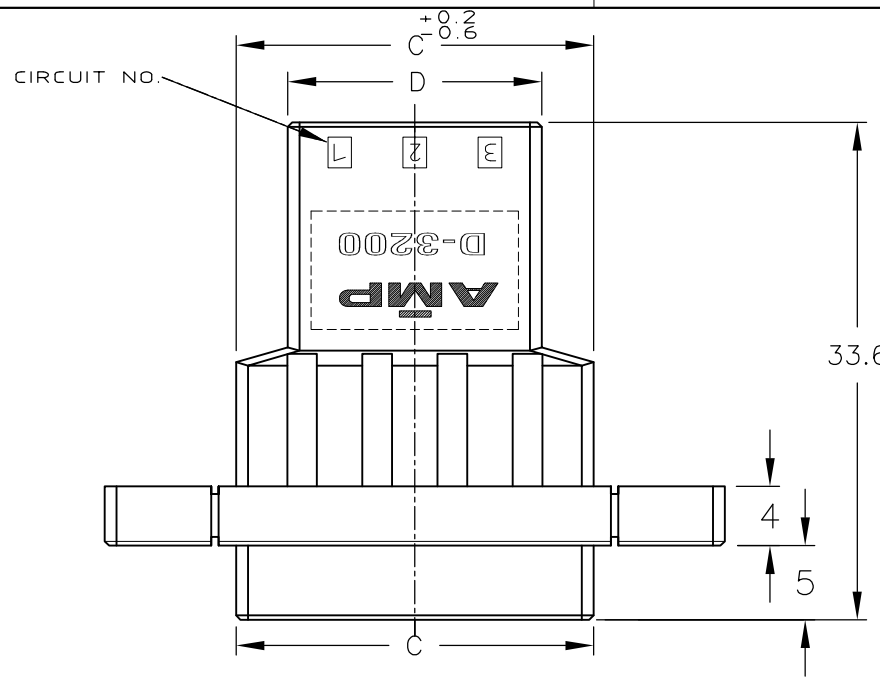


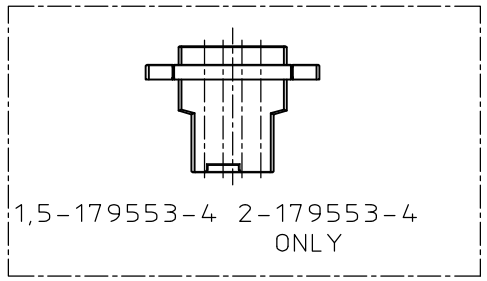


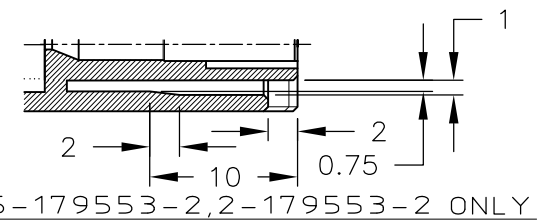


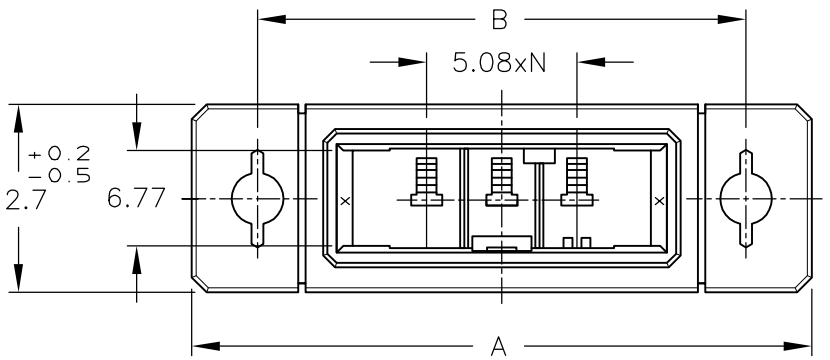


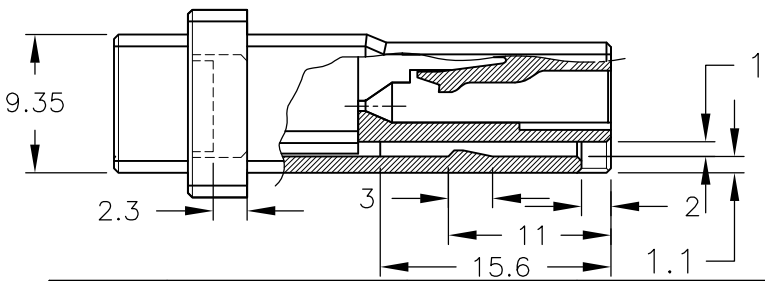


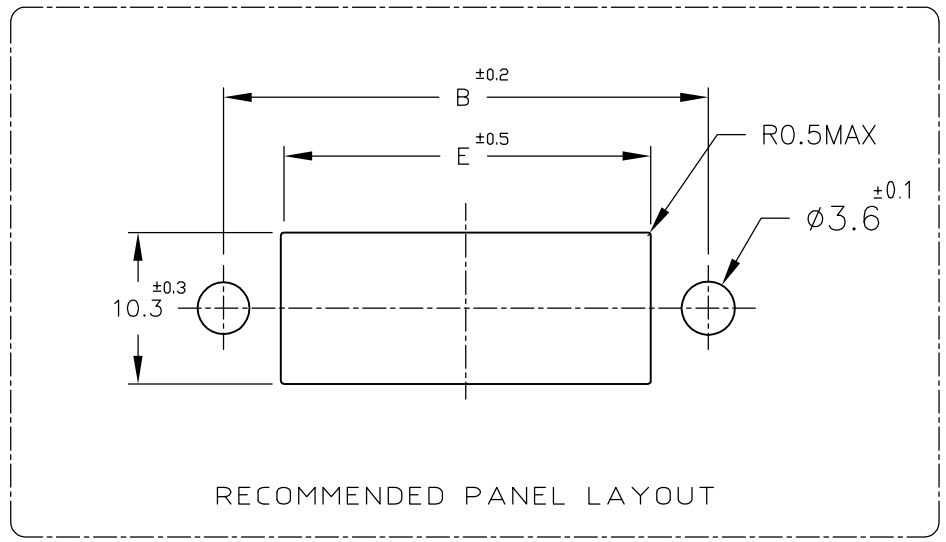


NOTES

1 MATERIAL:GLASS FIELD THERMO PLASTIC,POLYESTER
COLOR;BLACK

~~2 TO COAT ALL SURFACE OF HOUSING WITH TEFLON~~

3 PRODUCT SPEC:108-5349

4 PANEL ATTACHMENT RECOMMENDATION M3 SCREW

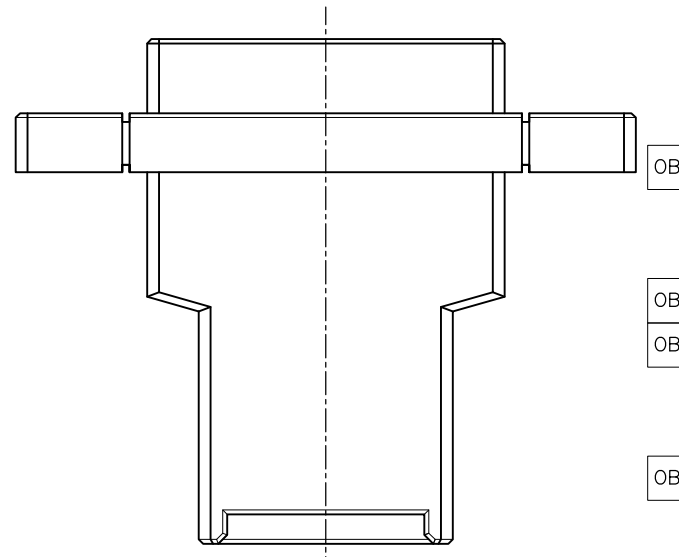

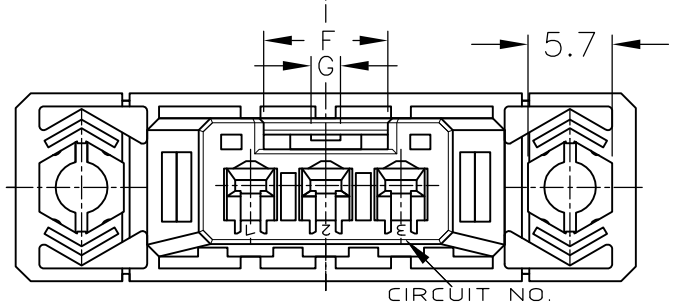


| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| OBSOLETE | 2 | | 4 | 46.99 | 38 | 29.24 | 22.24 | 30 | 8.4 | 2 | 3 | X | 5-179553-4 |
| — | | | 4 | 46.99 | 38 | 29.24 | 22.24 | 30 | 8.4 | 2 | 3 | Y | 2-179553-4 |
| — | | | 4 | 46.99 | 38 | 29.24 | 22.24 | 30 | 8.4 | 2 | 3 | X | 1-179553-4 |
| OBSOLETE | 2 | | 3 | 41.91 | 33 | 24.16 | 17.16 | 25 | 8.4 | 2 | 2 | Y | 6-179553-3 |
| OBSOLETE | 2 | | 3 | 41.91 | 33 | 24.16 | 17.16 | 25 | 8.4 | 2 | 2 | X | 5-179553-3 |
| — | | | 3 | 41.91 | 33 | 24.16 | 17.16 | 25 | 8.4 | 2 | 2 | Y | 2-179553-3 |
| — | | | 3 | 41.91 | 33 | 24.16 | 17.16 | 25 | 8.4 | 2 | 2 | X | 1-179553-3 |
| OBSOLETE | 2 | | 2 | 36.83 | 28 | 19.08 | 12.08 | 20 | 8.4 | 2 | 1 | X | 5-179553-2 |
| — | | | 2 | 36.83 | 28 | 19.08 | 12.08 | 20 | 8.4 | 2 | 1 | Y | 2-179553-2 |
| — | | | 2 | 36.83 | 28 | 19.08 | 12.08 | 20 | 8.4 | 2 | 1 | X | 1-179553-2 |
| FINISH | KEYING PATTERN | | POS. / DIMENSION | A | B | C | D | E | F | G | N | KEY | PART NUMBER |

| LTR | (REVISION RECORD) | DR | CHK | DATE |
|---|---|---|---|---|
| H | REVISED | H.U | N.Y | 24APR 12 |
| G | REVISED PER ECR-11-012413 | T.T | T.M | 16JUN 11 |

TE Connectivity

(WIRE RANGE) — mm² (AWG – )

(INSULATION DIA.) — – mmø

(MATERIAL) SEE NOTES

(FINISH)

DR. 31 JAN 94 N.Matsubara

DE. 31 JAN 94 N.Matsubara

CHK. 1 FEB 94 S.MANABE

APP. 1 FEB 94 S.MANABE

(NAME)

WIRE TO WIRE TAB HSG FOR DYNAMIC
D-3200S PANEL MOUNT TYPE

(GENERAL TOLERANCE)
≤10 : ±0.2
10≤30 : ±0.25
30≤100 : ±0.3
ANGLE : ±3°

SIZE A3 | LOC J | (No.) C-179553

(SCALE) 2/1 | REV. H | SHEET 1 OF 1

DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

AMP-J
REV.10/'83