
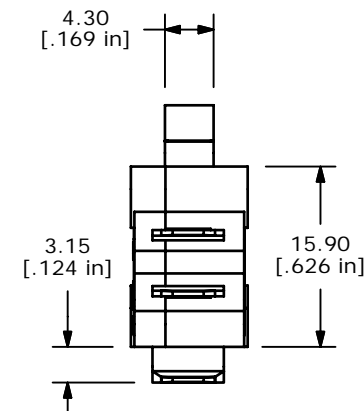
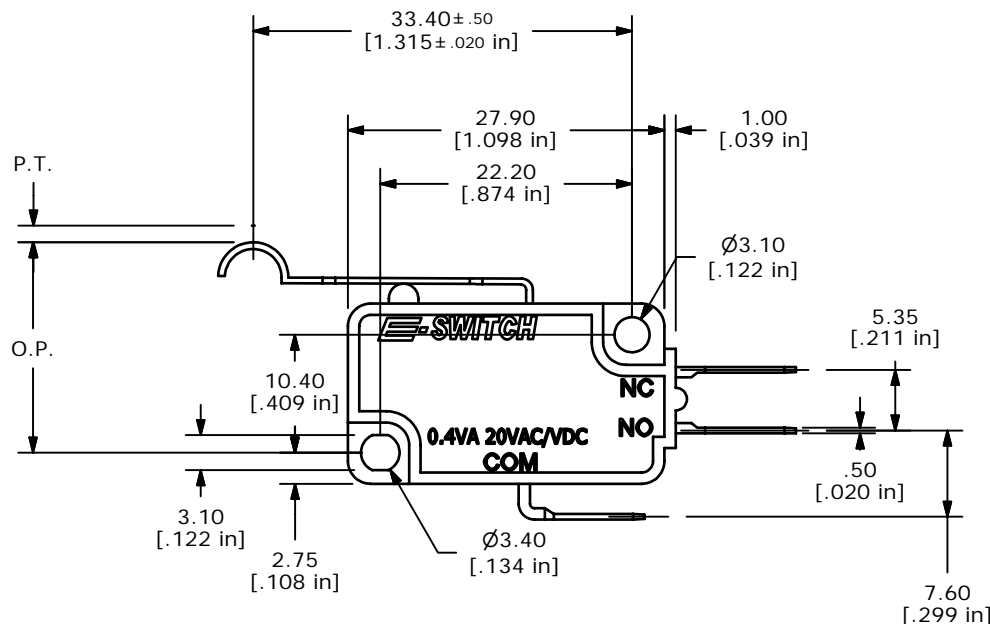


O.P. (MM)	P.T. (MM)
19.0±1.5	5.2 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING: 0.4VA @20VAC OR DC
 4. OPERATING FORCE: 050±20 GRAMS
 5. OPERATING TEMP: -25°C TO 85°C
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
 8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
 10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
 11. ▲ DENOTES CRITICAL PARAMETER.
 12. 2002/95/EC (ROHS) COMPLIANT
 13. CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (P/N Q990000)

E-SWITCH®

REV	PCR NO	DESCRIPTION	DATE	BY
B	15822	EDIT FORCE NOTE	2/27/06	PH
A	15806	RELEASED FOR PRODUCTION	2/23/06	PH

TITLE LS085R104F050C1A				
SCALE	DATE	DR	DWG	REV
1.5:1	2/23/2006	PH	Q950034	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED