

IEC Appliance Inlet C8, Screw-on Mounting, Front Side, Solder or Quick-connect or Print Terminal



See below:

**Approvals and Compliances**

**Description**

- Panel Mount :  
Screw-on mounting , from front side
- Appliance Inlet , Pin temperature 70 °C , Protection class II
- Solder, Quick Connect or PCB Terminal
- Solder terminals in horizontal or vertical orientation

**Characteristics**

- Contact pins are turned from solid material

**Weblinks**

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

**Technical Data**

|                                 |  |
|---------------------------------|--|
| Ratings IEC                     | 2.5 A / 250 VAC; 50 Hz   |
| Ratings UL/CSA                  | 2.5 A / 250 VAC; 60 Hz   |
| Dielectric Strength             | > 3 kVAC between L-N<br>> 1.5 kVAC between L/N-PE<br>(1 min/50 Hz) |
| Allowable Operation Temperature | -25 °C to 70 °C  |
| IP-Protection                   | from front side IP 20 acc. to IEC 60529                            |
| Insulation cover                | Suitable for appliances with protection class II acc. to IEC 61140 |
| Material: Housing               | PA6, black / grey / white, UL 94V-0                                |

|                         |  |
|-------------------------|--|
| appliance inlet/-outlet | C8 acc. to IEC 60320-1<br>UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 2.5 A, Protection Class II |
|-------------------------|--|

**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

**Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: 2571

| Approval Logo | Certificates                  | Certification Body | Description                      |
|---------------|-------------------------------|--------------------|----------------------------------|
|               | <a href="#">VDE Approvals</a> | VDE                | VDE Certificate Number: 40002274 |
|               | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E96454           |
|               | <a href="#">CSA Approvals</a> | CSA                | CSA Certification Record: 27324  |

**Product standards**

Product standards that are referenced

| Organization | Design                | Standard         | Description   |
|--------------|-----------------------|------------------|---|
|              | Designed according to | IEC 60320-1      | Appliance couplers for household and similar general purposes         |
|              | Designed according to | UL 498           | Standard for Attachment Plugs and Receptacles                         |
|              | Designed according to | CSA C22.2 no. 42 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |





**Application standards**

Application standards where the product can be used


| Organization   | Design                         | Standard     | Description   |
|--|--------------------------------|--------------|---|
|  | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. |

**Compliances**

The product complies with following Guide Lines

| Identification   | Details                                      | Initiator   | Description   |
|--|--|-------------|---|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS   | SCHURTER AG | EU Directive RoHS 2011/65/EU  |
|  | China RoHS                                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
|  | REACH  | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

**Dimensions [mm]**

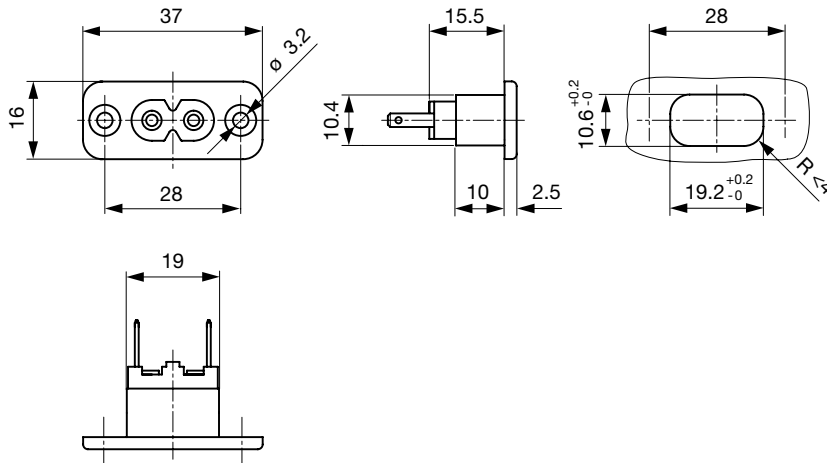

Length of the terminal please find at the order code configuration table

**Config. Code**



2571 - H - A B C 0 - D - E G F






The characters are placeholders for the correspondingly keys of selections from the key tables.

2571 - **H** - A B C 0 - D - E G F = **Type**

| Type                | Configuration key |
|---------------------|-------------------|
| protection class II | X                 |

2571 - H - **A** B C 0 - D - E G F = **Terminals**

| Terminal L   | Configuration key |
|--|-------------------|
| short solder terminal (L = 4.8 mm)  | 2                 |
| long solder terminal (L = 8.5 mm)   | 3                 |

| Terminal L  | Configuration key |
|---|-------------------|
| PCB-terminal short (additional solder terminal)  | 5                 |
| PCB-terminal long (additional solder terminal)   | 6                 |
| Blade terminal (2.8 x 0.8 mm)                    | 7                 |
| PCB-terminal (standard)                          | A                 |
| PCB-terminal (short)                             | B                 |

| Terminal L          | Configuration key |
|---------------------|-------------------|
| PCB-terminal (long) | C                 |



| Color | Configuration key |
|-------|-------------------|
| Black | A                 |
| Grey  | B                 |
| White | D                 |

2571 - H - A **B C O - D - E G F** = Terminals

| Terminal N                                      | Configuration key |
|---|-------------------|
| short solder terminal (L = 4.8 mm)              | 2                 |
| long solder terminal (L = 8.5 mm)               | 3                 |
| PCB-terminal short (additional solder terminal) | 5                 |
| PCB-terminal long (additional solder terminal)  | 6                 |
| Blade terminal (2.8 x 0.8 mm)                   | 7                 |
| PCB-terminal (standard)                         | A                 |
| PCB-terminal (short)                            | B                 |
| PCB-terminal (long)                             | C                 |

Symbols similar as in table A

2571 - H - A B **C O - D - E G F** = Terminals

| Terminal Ground  | Configuration key |
|------------------|-------------------|
| without terminal | 0                 |

Symbols similar as in table A

2571 - H - A B C O - **D - E G F** = Color

2571 - H - A B C O - D - **E G F** = Style

| Style                         | Configuration key |
|-------------------------------|-------------------|
| flange with countersunk holes | 1                 |
| flange with through holes     | 2                 |

2571 - H - A B C O - D - E **G F** = Dimension S

| Dimension "S" | Configuration key |
|---------------|-------------------|
| 00            |                   |

The dimension "S" is displayed in ( $\frac{1}{10}$  mm). This information is also valid for the order code

2571 - H - A B C O - D - E G **F** = Orientation of Terminals

| Orientation of Terminals | Configuration key |
|--------------------------|-------------------|
| horizontal               | A                 |
| vertical                 | B                 |

All Variants

| Terminals L / N                    | Orientation of Terminals | Color | Style                         | Config. Code       | Order Number |
|------------------------------------|--------------------------|-------|-------------------------------|--------------------|--------------|
| short solder terminal (L = 4.8 mm) | vertical                 | Black | flange with countersunk holes | 2571-X-2200-A-100B | 6160.0004    |
| long solder terminal (L = 8.5 mm)  | vertical                 | Black | flange with through holes     | 2571-X-3300-A-200B | 6160.0006    |
| Blade terminal (2.8 x 0.8 mm)      | vertical                 | Black | flange with countersunk holes | 2571-X-7700-A-100B | 6160.0007    |

The listed variants should be available from stock. Other versions on request [www.schurter.com/contact](http://www.schurter.com/contact)

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs