


# VT Type 7.0 x 5.0 mm SMD Voltage Controlled Crystal Oscillator

## FEATURE

- Typical 7.0 x 5.0 x 1.75 mm 6 pads ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Tri-state enable/disable


## TYPICAL APPLICATION

- Set-top Box, HDTV
- WiMAX/WLAN
- xDSL/ VoIP, Cable modem

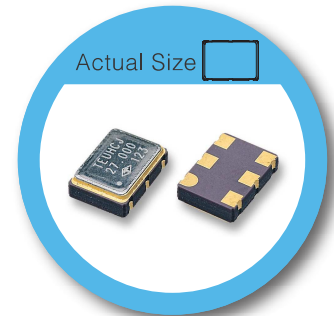


RoHS Compliant

## DIMENSION (mm)

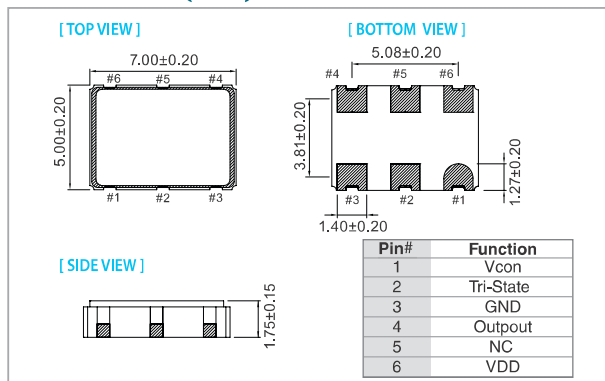

## SOLDER PAD LAYOUT (mm)

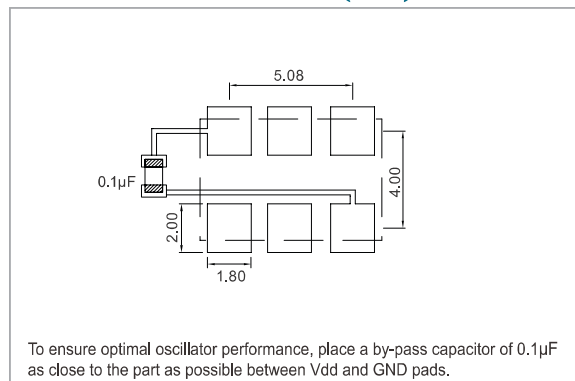

## ELECTRICAL SPECIFICATION

Parameter	3.3 V		Unit
	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-5%	VDD+5%	V
Frequency Range	1.5	170	MHz
Standard Frequency	10,20,25,27,32,768,35,328,38,88,61,44,122,88, 153,6		
Absolute Pulling Range (APR)	±50	—	ppm
Control Voltage Range	0.3	3.0	V
Supply Current			mA
1.5 MHz ≤ Fo < 20 MHz	—	10	
20 MHz ≤ Fo < 50 MHz	—	20	
50 MHz ≤ Fo ≤ 80 MHz	—	30	
80 MHz < Fo < 160 MHz	—	40	
160 MHz ≤ Fo ≤ 170 MHz	—	50	
Output Level (CMOS)			V
Output High (Logic"1")	2.97	—	
Output Low (Logic"0")	—	0.33	
Transition Time: Rise/Fall Time+			nSec
1.5 MHz ≤ Fo < 20 MHz	—	5	
20 MHz ≤ Fo < 50 MHz	—	4	
50 MHz ≤ Fo ≤ 80 MHz	—	3	
80 MHz < Fo ≤ 170 MHz	—	2	
Start Time	—	5	mSec
Tri-State(Input to Pin 2)			V
Enable (High voltage or floating)	2.31	—	
Disable (Low voltage or GND)	—	0.99	
Period Jitter (Pk-Pk)	—	40	pSec
RMS Phase Jitter (Integrated 12kHz-20MHz)	—	1	pSec
Linearity	—	10	%
Modulation Bandwidth (BW)			kHz
1.5 MHz ≤ Fo ≤ 170 MHz	15	—	
Input Impedance			kΩ
1.5 MHz ≤ Fo ≤ 170 MHz	10000	—	
Phase Noise@30.72MHz			dBc/Hz
100 Hz	—	-115	
1 kHz	—	-135	
10 kHz	—	-150	
Aging (@ 25°C 1st year)	—	±3	ppm
Storage Temp. Range	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

+ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

## FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	
	±25	±50
-10 ~ +60	○	○
-20 ~ +70	○	○
-40 ~ +85	△	○

\* ○: Available △: Conditional X: Not available

\* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1<sup>st</sup> year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Rev(18)04/2017

www.taiien.com

sales@taiien.com.tw

Specifications subject to change without notice.