

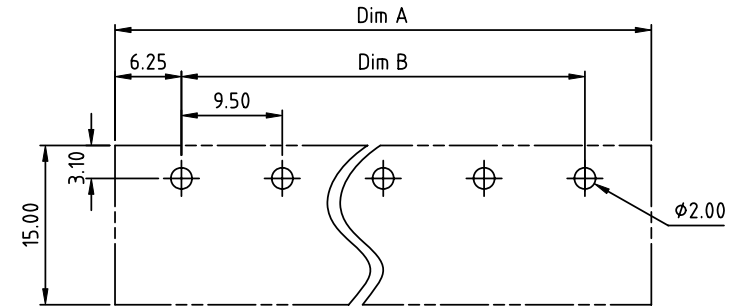
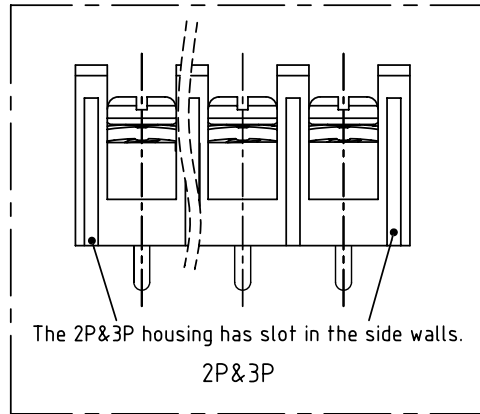
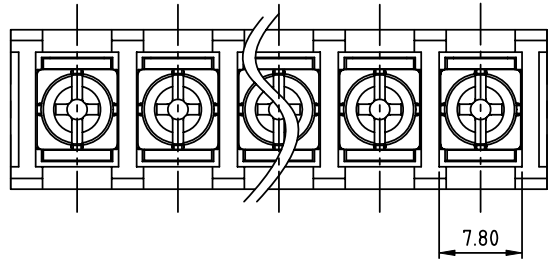


PRODUCT NUMBER	PITCH
YK504xx0x0JOG	9.50 mm

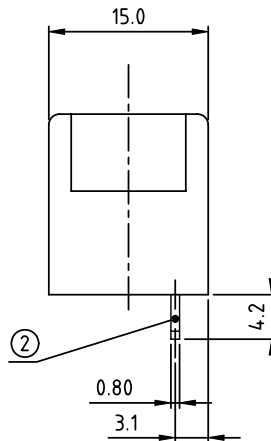

RECOMMENDED P.C.B LAYOUT
TOP VIEW

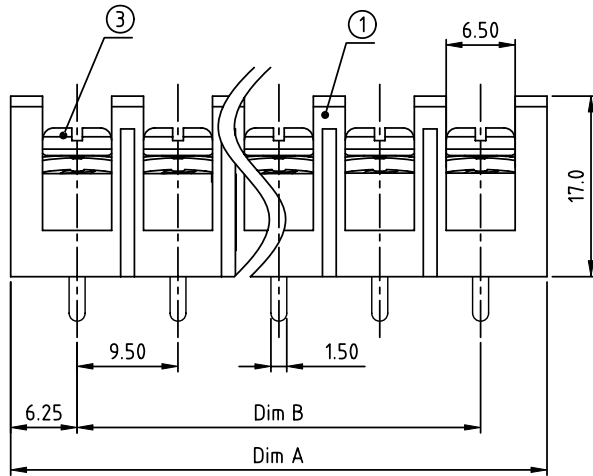

MATERIALS & ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 20 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 M Ω OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 12 Lb-in.
 WIRE RANGE: 22 - 12AWG
 1) HOUSING: THERMOPLASTIC, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t
 3) TERMINAL SCREWS: STEEL, M3.5
 APPROVAL: US

DIMENSION

Dim A	N \times 9.5+3.0
Dim B	(N-1) \times 9.5

N=Number of poles

Poles	Tolerance
2p-4p	± 0.20
5p-10p	± 0.30
11p-24p	± 0.40
25p-30p	± 0.60

PART NO.: YK 504xx 0 x 0 JOG

No. of poles
 02 2 poles
 03 3 poles
 ...
 30 30 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
 (lead<4%)
 In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles ϕ X ± 0.5 X.X ± 0.3 X* ± 1 X.XX ± 0.1	BARRIER TYPE
				scale	sheet 1 of 1 size A4
				dr EVAN LU 061414	dwg no YK504xx0x0JOG
				enr EVAN LU 061414	type CUSTOMER Drawing
				chr HANKE FENG 061414	
				appd SHI JUN 061414	
sheet index	revision sheet	A	1		