


ECS-MPIL0530

SMD Power Inductor



## 1. Mechanical Dimension [Unit : mm]

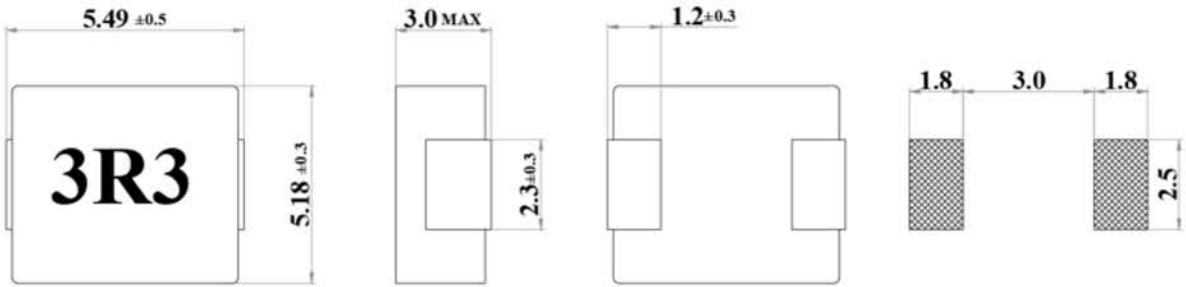

## 2. Electrical Characteristics



### ECS-MPIL0530 Series

Part No.	Inductance ( $\mu\text{H} \pm 20\%$ )	DC Resistance ( $\text{m}\Omega$ MAX)	DC Resistance ( $\text{m}\Omega$ TYP.)	Rated Current (A MAX)	Heat Rating Current DC(A)
ECS-MPIL0530-R68MC	0.68	12	11	14.0	8.5
ECS-MPIL0530-1R0MC	1.0	14	13	11.0	7.0
ECS-MPIL0530-1R5MC	1.5	25	20	10.0	6.0
ECS-MPIL0530-2R2MC	2.2	35	29	9.0	5.5
ECS-MPIL0530-3R3MC	3.3	38	32	7.0	5.0
ECS-MPIL0530-4R7MC	4.7	60	50	5.0	3.0
ECS-MPIL0530-220MC	22	324	270	3.0	2.0



Measuring Frequency (L) : 100KHz/0.1V

Rated Current: D.C. Current at which the Inductance drops 30%(MAX.) from its value without current



### ECS-MPIL0530-R68MC

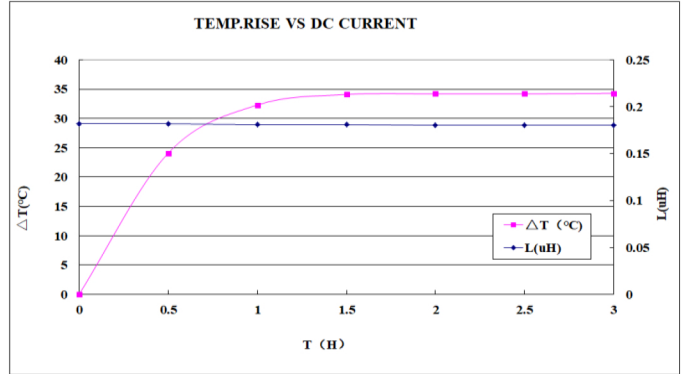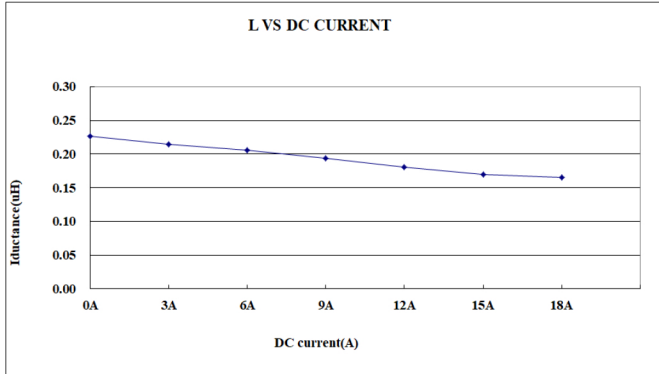



### ECS-MPIL0530-1R0MC

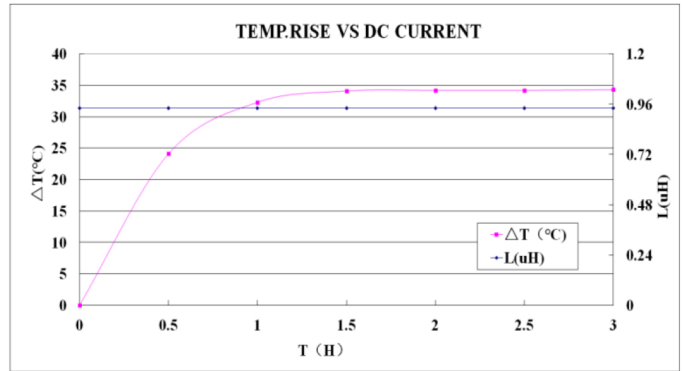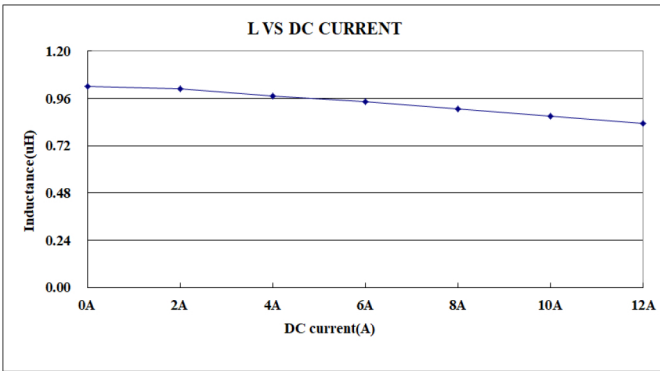



### ECS-MPIL0530-1R5MC

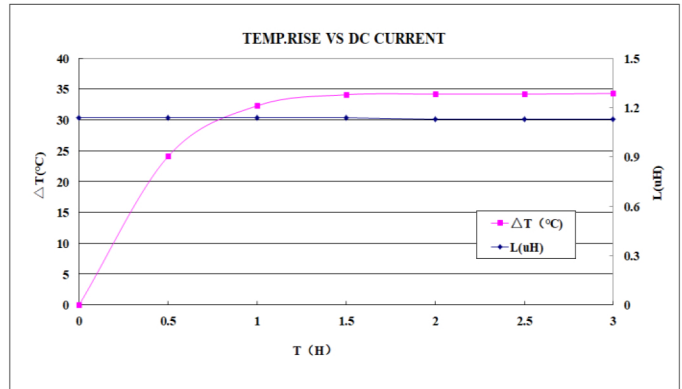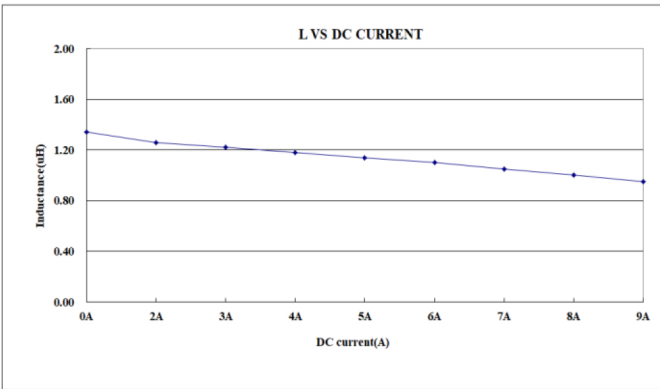



### ECS-MPIL0530-2R2MC

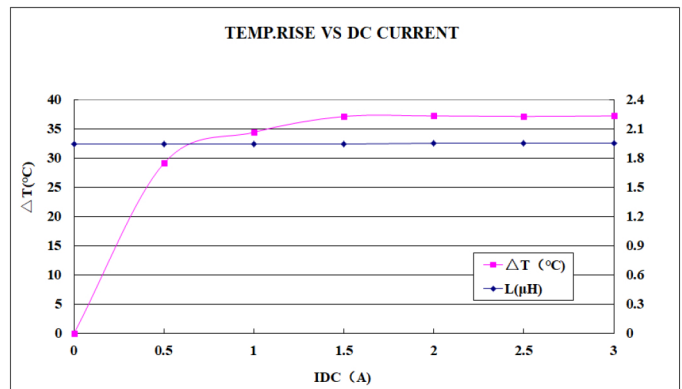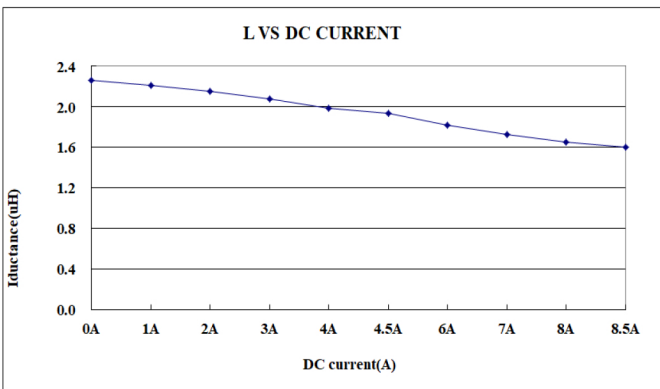



**ECS-MPIL0530-3R3MC**

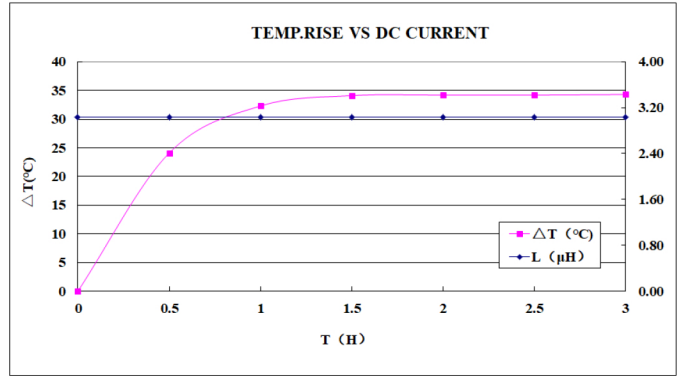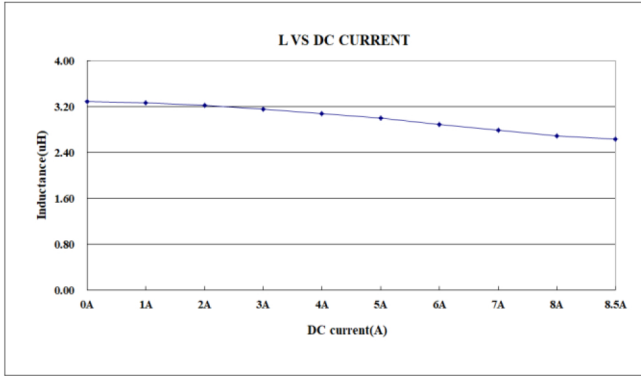

**ECS-MPIL0530-4R7MC**

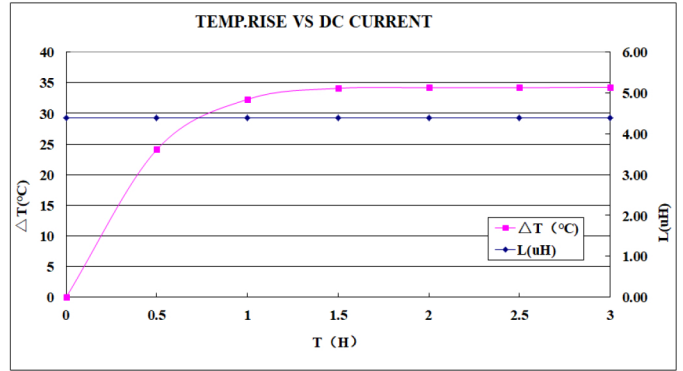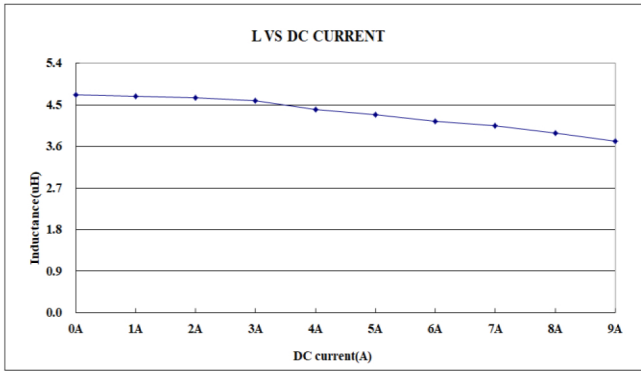

**ECS-MPIL0530-6R8MC**

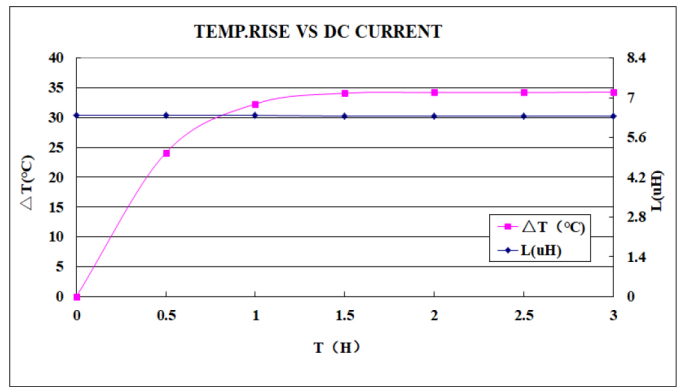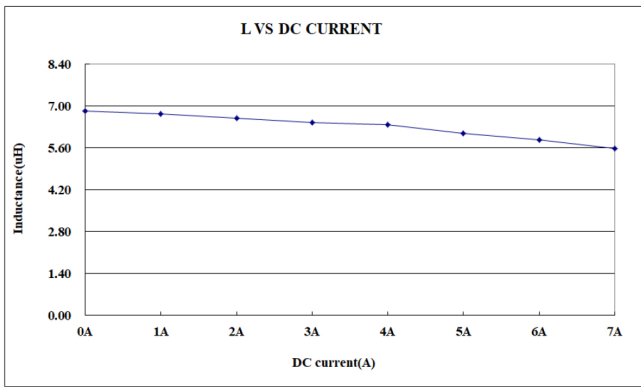

**ECS-MPIL0530-220MC**

