


6 5 4 3 2 1

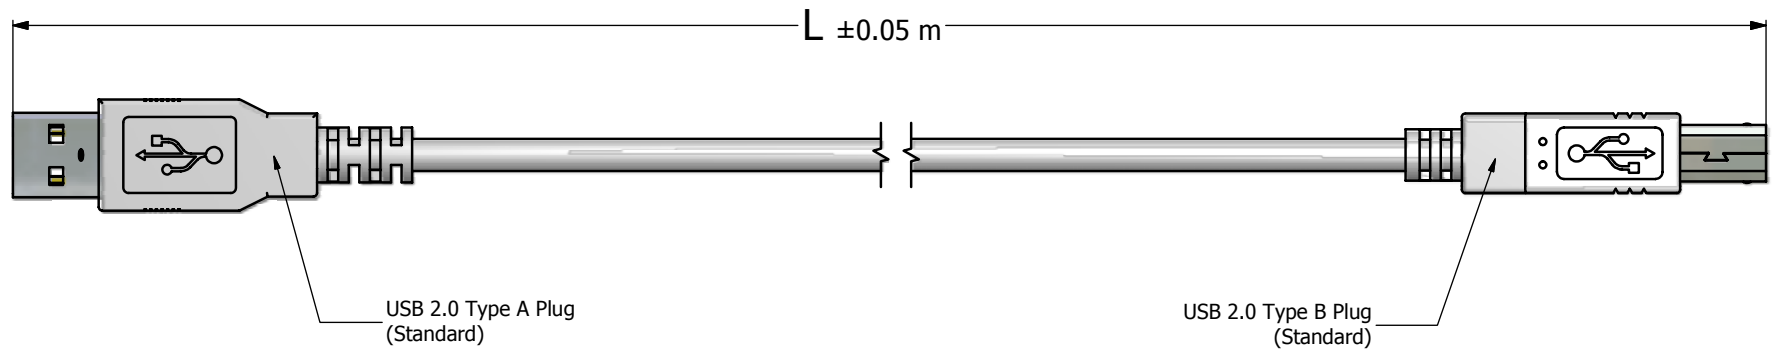

**NOTES:**

**1. Electrical Specifications:**

- Meets USB 2.0 specifications
- Low level Contact Resistance: 30 mOhm max.
- Insulation Resistance 1000 MOhm min.
- Currant Rating: 1.5 A max. @ 25° C
- DWV: 500 VAC/60s at sea level
- Operating Temperature: -40° C to +80° C

**2. Material and Finish:**

- USB Insulato: PBT, UL 94V-0, Color: White
- USB Overmold: PVC, UL 94V-0, Color: Black
- Metal Shell: Copper Alloy, Nickel plated
- Contact Material: Copper Alloy Contact Finish: 30 u" min. Au over 40 u" min. Nickel

**3. Shielded USB Cable Conifurgation**

AWM 2725 AWG28/1p + AWG24/2c, OD: 4.5 mm, Color: black

**4. RoHS compliant**

Directive 2002/95/EC  
"RoHS"  
Compliant

Cable Length L	Part Number
2 m	17-201081
3 m	17-201091
4.5 m	17-201111

THIS DRAWING MAY NOT BE COPIED, OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION  DOT NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1:2:1	Dim. in m
	Name	Title	Approval Date	0 PLC ±0.30	1 PLC ±0.20		Material: See Notes  Title: USB Patch Cord Standard to Standard Version Type A Plug to Type B Plug	Drawing No.: 17K1A102 Part No.: SEE P/N ABOVE
				2 PLC ±0.10	3 PLC ±0.05			
				ANGLES ±1°		2008	Date	Name
						Draw.	Sept. 23	Vincent Ke
						Appd.	Sept. 23	J. chaudry
						Norm		
						D-old		
	b		Jan/19/2009	Vincent ke				
	a	original						
Rev.	Changes	Date	Name					

6 5 4 3 2 1