


PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

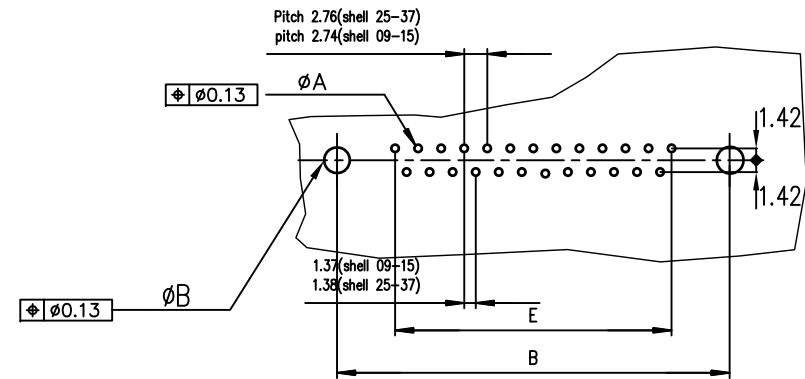

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GV00LF	D09S90C6GV00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GV00LF	D15S90C6GV00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GV00LF	D25S90C6GV00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GV00LF	D37S90C6GV00LF
						gold flash	0.76» gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family D-SUB		
ltr				ecn no		dr		date		title		
B				-		JAR		1996-07-24		FEMALE CONNECTOR DELTA LOW PROFILE		
C				LS05-004		MPE		2005-02-08		STRAIGHT PRESS-FIT		
D				LS06-0097		LGO		2006-07-29		scale 2:1		
E				LS06-0140		LGO		2006-09-25		dr		
F				ELX-I-24020		AAB		2016-06-06		engr		
										MITHUN PAUL 2016-06-06		
										ATHUL A.B 2016-06-06		
										BIJU K PAUL 2016-06-06		
sheet index				revision		F				type Product Customer Drawing		
				sheet		1						