

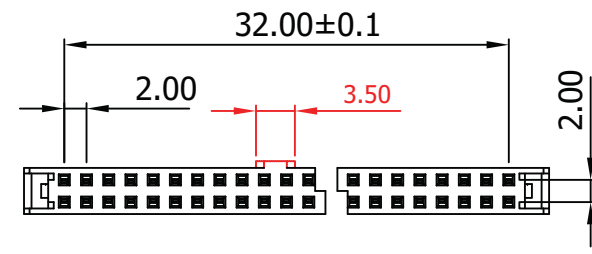
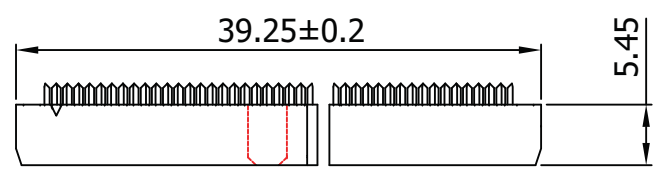


I.D.C SOCKET DUAL-ROW

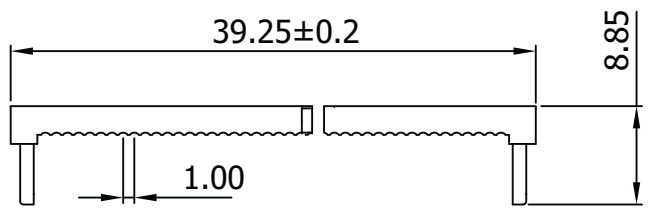

- Material:**
- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
 - Contact Material: Phosphor Bronze, Gold flash over Nickel
- Electrical:**
- Current Rating: 1Amp DC
 - Insulation Resistance: 1,000MΩ Min.
 - Dielectric Withstanding: 500V AC
 - Operating Temperature: -55°C ~ +105°C

Unit: MM±0.30MM

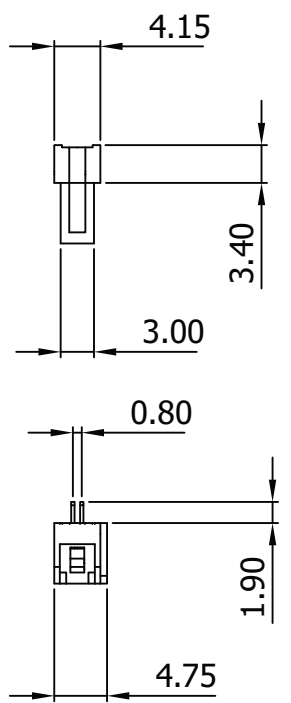

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	AWP2-34-7241-T-R
Title	IDC-Socket - 2.00MM Pitch, Gold Flash, Central Lug w/Strain Relief, 34 Contacts
Drawing No.	
Replace	rev00
Sheet	