



REV INITIALS DATE

DESCRIPTION

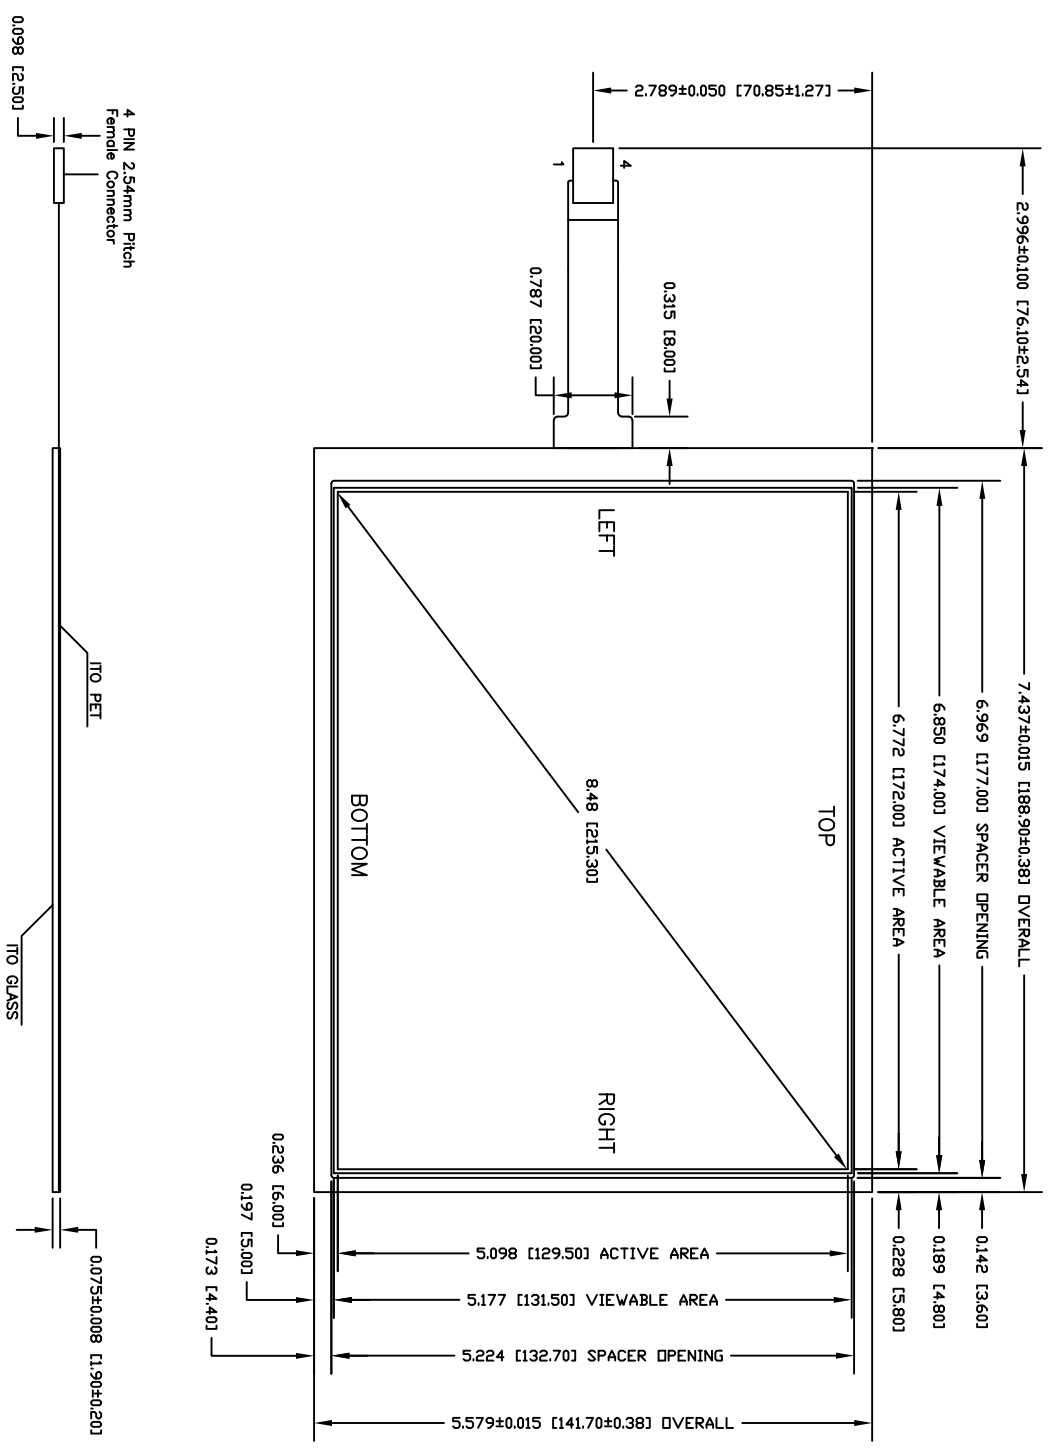

- NOTES:
1. TOLERANCE ± 0.020 UNLESS NOTED OTHERWISE.
 2. TOP CONDUCTIVE LAYER TO HAVE AN ANTI-GLARE HARDCOATED SURFACE..
 3. PIN ONE IS DESIGNATED BY THE NUMERICAL NUMBER 1 BY CONNECTOR END.
 4. PINOUT TO BE AS INDICATED.

PIN 1 - RIGHT,
 PIN 2 - LEFT,
 PIN 3 - BOTTOM,
 PIN 4 - TOP,
 TAIL TYPE: IMMERSION GOLD PLATED FPC WITH AMP PLAIN HOUSING AND TIN PLATED CONTACTS



BERGQUIST TOUGH PRODUCTS		301 WASHINGTON STREET		CANNON FALLS, MN 55605	
TITLE: 8 48 DIAGONAL 4-WIRE					
ROHS COMPLIANT					
DRN:	MLR	DATE:	5/30/08	TOL:	±0.020
CHKD:		DATE:		DRG #	9530A
APVD:		DATE:		PART #	400428
				REV	