

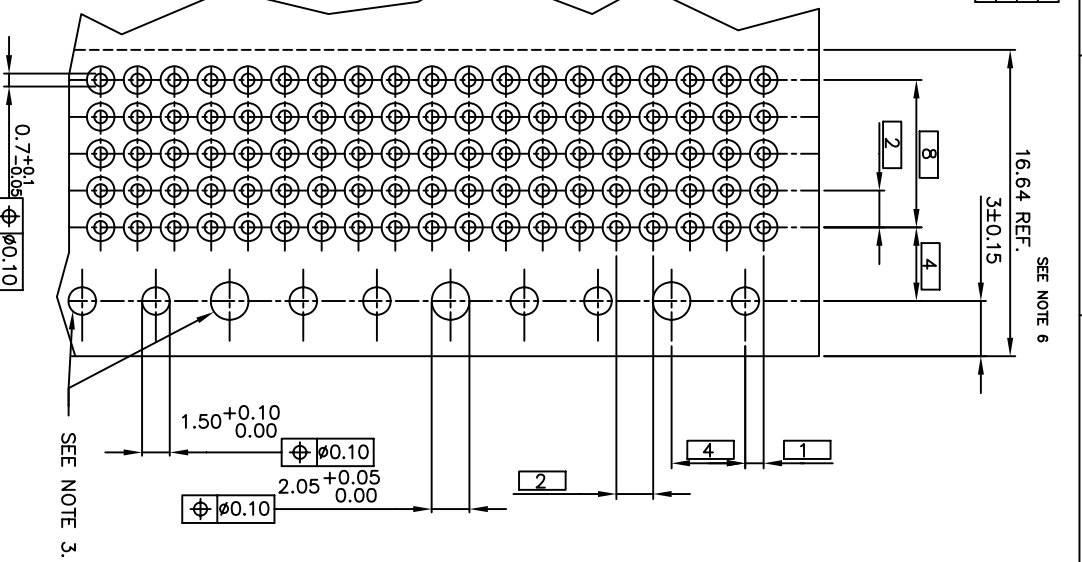


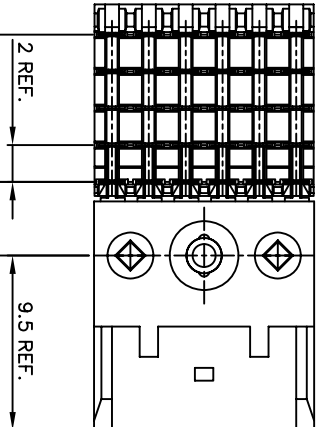
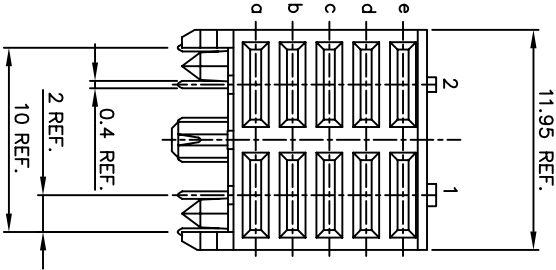


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1TY	TELECORDIA CO
-2TY	CUSTOMER SPECIAL
-3TY	CUSTOMER SPECIAL
-9TY	TELECORDIA CO
-1TYE	CUSTOMER SPECIAL
-2TYE	CUSTOMER SPECIAL
-3TYE	CUSTOMER SPECIAL
-9TYE	TELECORDIA CO

PC BOARD VERSIONS		PCB THICKNESS	DIM "A"	ROWS	KIND
PRODUCT NR:	85876-X02LF	1.6	2.90	With Row a,b,c,d,e	
	85876-X12LF	2.4	3.53	With Row a,b,c,d,e	
	85876-X22LF	1.6	2.90	With Row a,c,d,e	

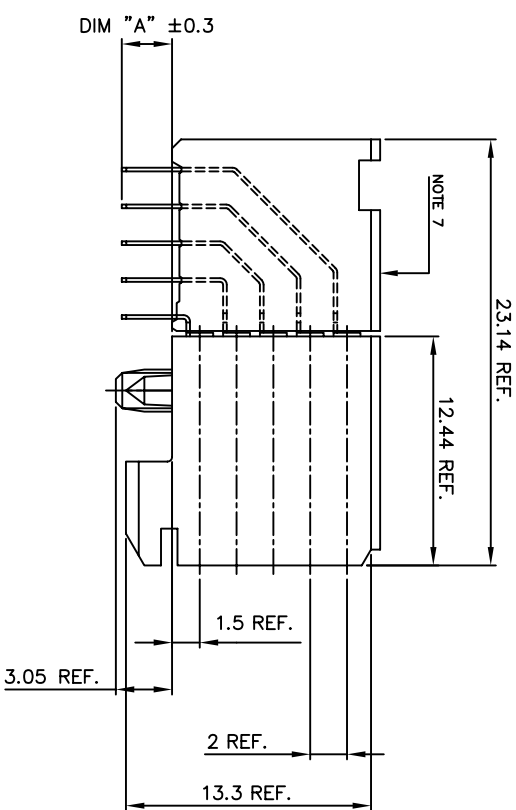

PC BOARD THICKNESS \bar{n} 0.2 (SEE TABLE)

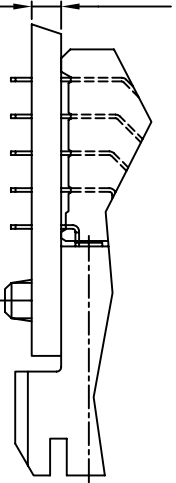

- NOTES:
- 1 BODY MATL: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PLATING OF COMPLIANT SECTIONS 0.5-1.5 um SnPb 85-97 OR 0.5-1.5 um PURE Sn FOR LEAD FREE.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK
 - 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code	SEE NOTES	tolerances unless otherwise specified	CUSTOMER COPY	www.falcon.com
LF	ect no	dr	date	
H	int-10074H	10/29/13		
	linear	0x	0x30	
	angles	0x	0x05	
D	body-0102	clul	041228	dr
E	body-0406	cmh1	15/07/09	dr
F	body-001	lbr3	18/15/08	chr
G	int-0134	zsh1	05/08/09	dr
sheet	revision			
index	sheet			

FCI ELECTRONICS
www.falcon.com

5 ROW POWER S.T.B.
RECEPTACLE 12mm MOD. P.P.
product family METRAL
size dng no 85876
code 213
sheet 1 of 1