

SUMMARY

Wires

Low	3
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	1F
Termination type	Female print PCB
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	HE*: Fixed receptacle, nut fixing, for printed circuit (back panel mounting)
Keying	3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material	Environment friendly aluminium (nickel plated, anthracite color) shell and nut, other pieces bronze/brass
Cable Fixing	∅ 0 - 0 mm
Variant	P : Watertight

Performance

Configuration	1F.303 : 3 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	12 Amps

Specifications

Contact Type: Print (straight)
Max. Matings: 5000
Contact Dia.: 1.3 mm (0.051in)
R (max): 3.6 mOhm
Vtest (contact-shell): 1850 V (AC), 2600 V (DC)


Vtest (contact-contact): 1600 V (AC), 2250 V (DC)

Others

Endurance (Shell): 1000 mating cycles
Temp (min / max): -15°C / +100°C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 15/200/21 (Aluminium shell)
Pressure: 5 bars
IP Rating: 68

DRAWINGS

Draws

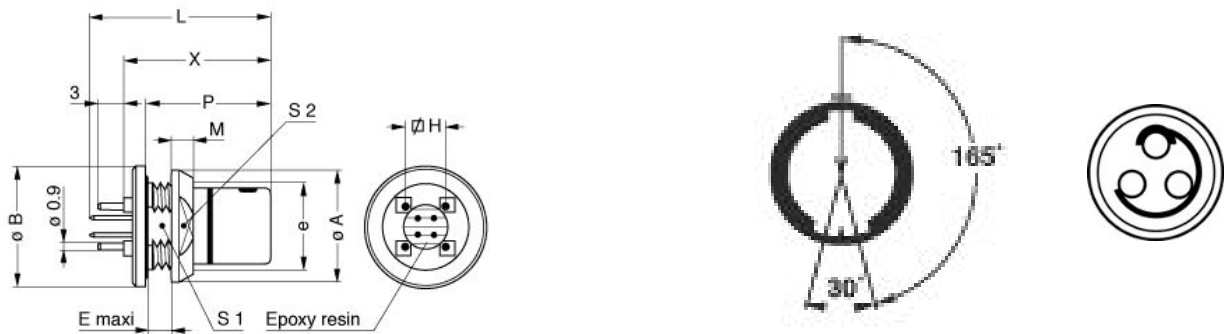

Dimensions

	A	B	E	H	L	M	P	S1	S2	X	e
mm.	17	17	3	7.62	21.5	3.2	14.5	11.5	14	17.5	M13x0.75
in.	0,67	0,67	0,12	0,30	0,85	0,13	0,57	0,45	0,55	0,69	

RECOMMENDED BY LEMO

Tools

None

Cables