

SMT30C Series

C-Class Non-Isolated

Data Sheet

Total Power: 30 Watts
Input Voltage: 10.2 - 13.8 Vdc
of Outputs: Single

SPECIAL FEATURES

- 30 A current rating
- Input voltage range: 10.2 - 13.8 Vdc
- Output voltage range: 0.9 - 5.0 V
- Industry-leading value
- Cost optimized design
- Excellent transient response
- Output voltage adjustability
- Path for future upgrades
- Supports silicon voltage migration
- Reduced design-in and qual time
- Designed-in reliability: MTBF of >4 million hours per Telcordia SR-332
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No. 60950
- UL 60690 File No. E139421
- TÜV Product Service (EN60950:2000)
- Certificate No. B 04 08 19870 228
- CB report and certificate to IEC60950-US/6415C/UL



Electrical Specifications

Input		
Input voltage range	Nominal 12 V	10.2 - 13.8 Vdc
Input current	Minimum load Remote OFF	230 mA 30 mA
Input current (max.)	(See Note 4)	13.8 A max. @ I _o max. and V _{in} = 10.8 V
Input reflected ripple	(See Note 2)	150 mA (pk-pk)
Remote ON/OFF Logic compatibility ON OFF		Positive logic >2.4 Vdc <0.8 Vdc
Start-up time (See Note 5)	Power up Remote ON/OFF	<30 ms <30 ms
Turn ON threshold		9.0 Vdc
Turn OFF threshold		7.6 Vdc
Output		
Voltage adjustability	(See Note 1)	0.9 - 5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	±3%
Line regulation	Low line to high line	±0.2%
Load regulation	Full load to min. load	±1.0%
Min/Max load		0 A/30A
Overshoot	At turn-on	1.0% max.
Undershoot	At turn-off	100 mV max.
Ripple and noise	5 Hz to 20 MHz (See Note 2)	50 mV pk-pk 14 mV rms
Transient response	(See Note 3)	75 mV max. deviation 150 μs recovery to within regulation band
Current share	Full load	±10%

All specifications are typical at nominal input V_{in} = 12 V, full load at 25 °C unless otherwise stated.

General Specifications

Efficiency		91%
Switching frequency	Fixed	300 kHz
Approvals and standards	(See Note 7)	TÜV Product Services IEC60950, UL/cUL60950
Material flammability		UL94V-0
Weight		28.3 g (1 oz)
Coplanarity		150 µm
MTBF	Telcordia SR-332	4,456,655 hours

Environmental Specifications

Thermal performance	Operating ambient temperature	-0 °C to +80 °C
(See Note 8)	Non-operating temperature	-40 °C to +125 °C
Protection		
Short-circuit	Foldback, non latching	
Over-temperature	Hiccup, non latching	
Recommended System Capacitance		
Input capacitance	(See Note 9)	270 µF / 20 mW ESR max.
Output capacitance	(See Note 9)	680 µF / 10 mW ESR max.

Ordering Information

Model Number ⁽¹⁾	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SMT30C-12SADJJ	150 W	10.2 - 13.8 Vdc	0.9 - 5.0 V	0 A	30 A	91%	±0.2%	±1.0%

Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Number of Outputs	Packaging Options
SMT	30	C	12	SADJ	J
SMT = Surface Mount	30 = 30 Amps	C = Cost Optimized	12 = 10.2 - 13.8 Vdc	SADJ = Single Adjustable Output	J = Pb free (RoHS 6/6 compliant)

Output Voltage Adjustment


The ultra-wide output voltage trim range offers major advantages to users who select the SMT30C series. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.9 Vdc to 5.0 Vdc. When the SMT30C series converter leaves the factory the output has been adjusted to the default voltage of 0.9 V.

Notes:

1. Uses external resistor from TRIM to ground. See Application Note 170 for details.
2. Measured with external filter. See Application Note 170 for details.
3. di/dt = 10 A/µs, Vin = Nom, Tc = 25 °C, load change = 0.50 Io max. to 0.75 Io max, and vice versa.
4. External input fusing recommended.
5. Power up is the time from application of dc input to POWER GOOD high. Remote ON/OFF asserted high to POWER GOOD high.
6. Signal line assumed <3 m in length.
7. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
8. See Application Note 170 for operation above 50 °C.
9. See Application Note 170 for more details.
10. For redundant current sharing applications that use ORing diodes to separate the outputs, please add the suffix '-S' to the part number, e.g. SMT30C-12SADJ-SJ. Please refer to Application Note 170 for further details.
11. NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/power> to find a suitable alternative.

Mechanical Drawings

Pin Assignments	
Pin	Function
1	Current Share
2	Trim
3	Ground
4	Ground
5	Ground
6	Sense-
7	Sense+
8	Remote ON/OFF
9	Power Good
10	Vin
11	Vin
12	Vout
13	Vout
14	Ground
15	Vout
16	Ground
17	Mechanical Support
18	Mechanical Support

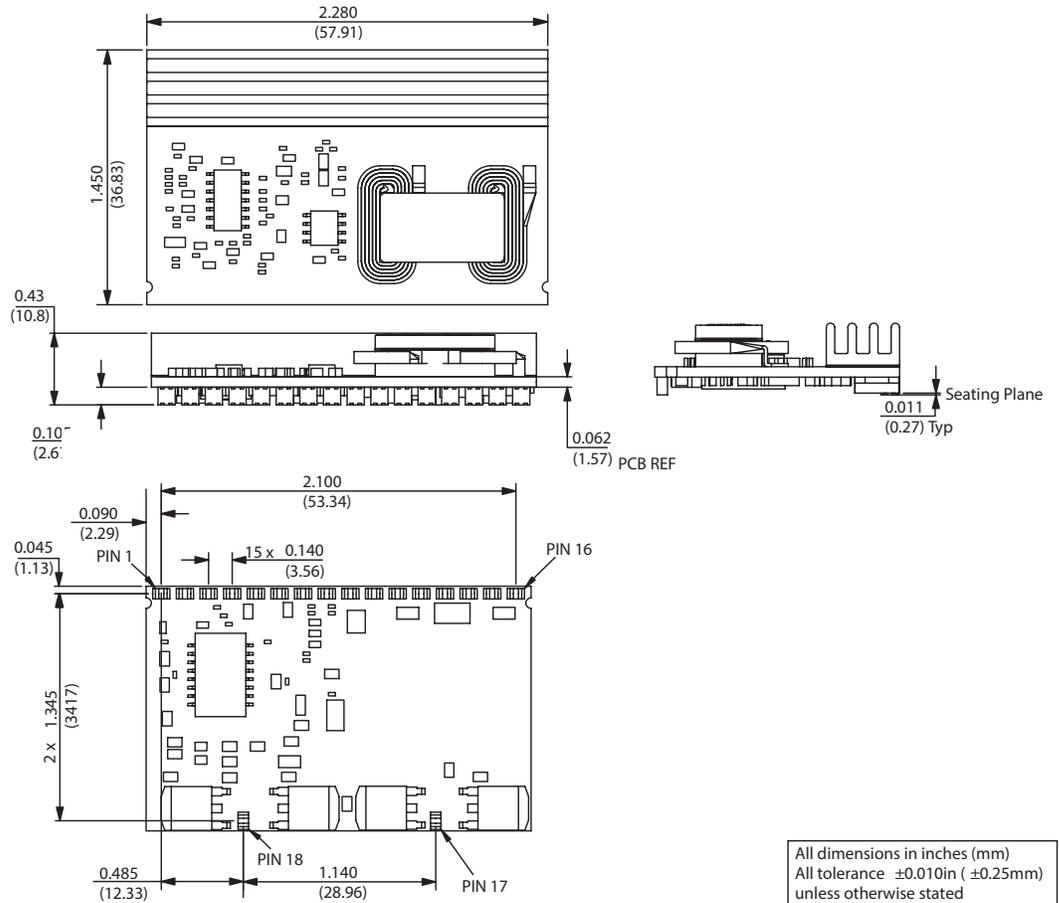

All dimensions in inches (mm)
 All tolerance ± 0.010 in (± 0.25 mm)
 unless otherwise stated

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com