


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- DO-IT-YOURSELF (DIY) $\varnothing 4\text{mm}$ STACKING SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
 INSULATOR BODY: POLYPROPYLENE
 PLUG BODY: BRASS, NICKEL PLATED
 CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
 *VOLTAGE: 1000V CAT III / 600V CAT IV P2
 REINFORCED INSULATION, CE MARK
 CURRENT: 36A MAX.
 INTERNAL RESISTANCE: $<10\text{m}\Omega$
 TEMPERATURE: -20° TO $+80^{\circ}$ C.
- MAXIMUM WIRE SIZES:
 CONDUCTOR: $\varnothing.090$ (12AWG)
 INSULATION: $\varnothing.16$ ($\varnothing 4.0$) MAX.
 STRIP LENGTH: .25 (6.4)
 * With IEC rated test lead wire.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	2/11/00	
A	CONFIGURATION CHANGE; ADDRESS	7/9/03	
B	Rating & configuration change	5/9/07	

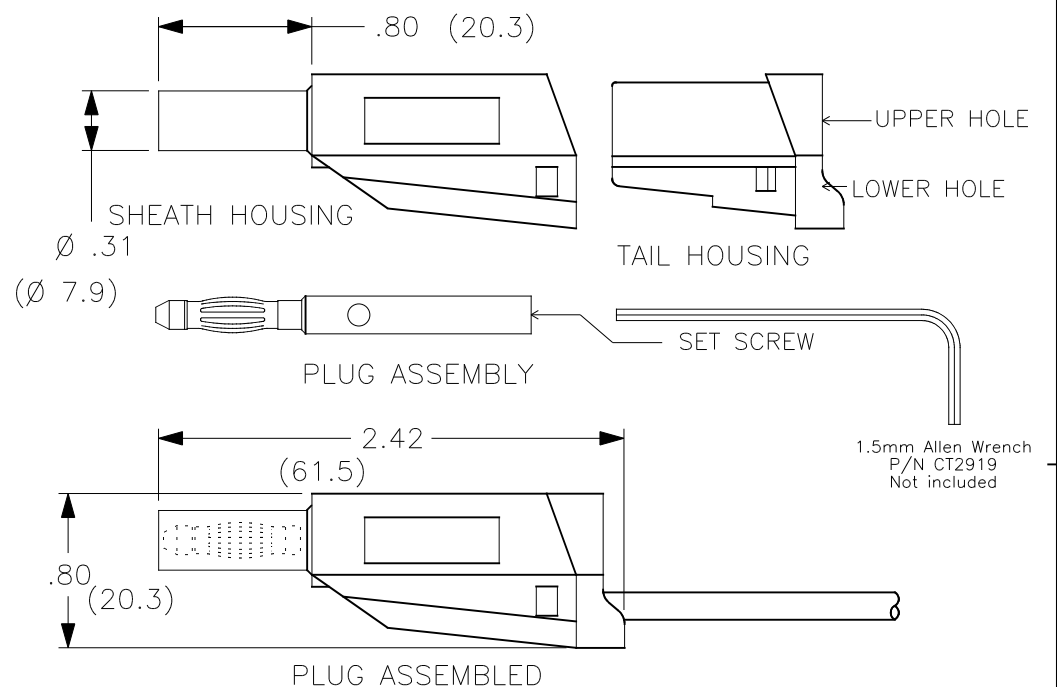

- Assembly Instructions:
- Slide wire through lower hole in Tail Housing.
 - Strip wire .25" (6.4mm).
 - Insert stripped wire into Plug Assembly side hole and tighten Set-Screw. Set-Screw requires 1.5mm Allen Wrench (Cal Test P/N CT2919).
 - Push Plug Assembly into Tail Housing upper hole and take slack out of wire.
 - Snap Tail Housing assembly into Sheath Housing.

PART NUMBER
CT2631-#

- COLOR:
- 0 - BLACK
 - 2 - RED
 - 4 - YELLOW
 - 5 - GREEN
 - 6 - BLUE
 - 9 - WHITE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$ $.XX \pm .02$ $.XXX \pm .005$ DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
MATERIAL		DRAWN	WDH	2/10/00	DIY 4mm STACKING SHEATH PLUG, SCREW ATTACHMENT			
FINISH		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY		ENGR.			A	43F45	P263100	B
USED ON		DESIGN ACTIVITY			SCALE	1:1	SHEET	1 OF 1
APPLICATION								