

# .250" MOUNT PANEL LIGHTS

## 40 Series

- Mounting Hardware Provided - For Detailed LED Data, See Discrete Section, MODEL 200

1 Model	Wires
C <sup>[1]</sup> (optional)	W (optional)
405 <sup>[2]</sup>	
41	
44	
46	
461	
464	

### TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each numbered category in the tables below.

1 Model	2 LED	3 Voltage	4 Lens Diffusion	5 Lens Color	6 Bezel Color
41	-BCG	5H	-C	G	0

→ Part Number **41-BCG5H-CG0**

STANDARD INTENSITY - DIFFUSED ENCAPSULATION					
2 LED	Color	λpk (nm)	Iv <sup>[3]</sup> (mcd)	Viewing Angle	V/C Table <sup>[5]</sup>
-BR <sup>[4]</sup>	RED	635	14	60	I
-BA <sup>[4]</sup>	AMB	583	16	60	I
-BG <sup>[4]</sup>	GRN	565	10	60	I

Voltage/Current	
Design Vf/If	Max Vf/If
<b>V/C Table I</b>	
5V/22mA	5.5V/28mA
12V/20mA	14V/25mA
15V/24mA	16.5V/28mA
24V/17mA	26V/20mA
28V/16.5mA	30V/18mA
48V/15mA	50V/16mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

3 Voltage <sup>[6]</sup>
2
5H
12H
15H
24H
28H
48H
60H
120 <sup>[9]</sup>

MEDIUM INTENSITY - TINTED ENCAPSULATION					
LED	Color	λpk (nm)	Iv <sup>[3]</sup> (mcd)	Viewing Angle	V/C Table <sup>[5]</sup>
-BCR	RED	635	120	35	I
-BCA	AMB	583	100	35	I
-BCG	GRN	565	80	24	I

Voltage/Current	
Design Vf/If	Max Vf/If
<b>V/C Table II</b>	
5V/15mA	5.5V/23mA
12V/15mA	14V/20mA
15V/15mA	16.5V/18mA
24V/15mA	26V/18mA
28V/15mA	30V/17mA
48V/9.5mA	50V/10mA
60V/7mA	65V/8mA
120VAC/3.5mA	130VAC/4mA

4 Lens Diffusion
-C Clear
-N Diffused

HIGH INTENSITY - WATERCLEAR ENCAPSULATION					
LED	Color	λpk (nm)	Iv <sup>[3]</sup> (mcd)	Viewing Angle	V/C Table <sup>[5]</sup>
-NWR	RED	634	2800	30	I
-NWO	ORG	605	2000	30	I
-NWA	AMB	592	2800	30	I
-NWG	GRN	520	2400	45	II
-NWB	BLU	465	700	45	II
-NWW <sup>[8]</sup>	CWHT		2500	50	II
-NWL <sup>[8]</sup>	WWHT		1800	50	II
-NKR	RED	634	3600	15	I
-NKO	ORG	605	8000	15	I
-NKA	AMB	592	3600	15	I
-NKG	GRN	520	10000	15	II
-NKB	BLU	465	3000	15	II
-NKW <sup>[8]</sup>	CWHT		9200	20	II
-NKL <sup>[8]</sup>	WWHT		9200	15	II

5 Lens Color	
R Red	B Blue
A Amber	W Water Clear
Y Yellow	
G Green	-S Smoke <sup>[10]</sup>

SPECIALTY LEDs						
LED	Color	λpk (nm)	Iv <sup>[3]</sup> (mcd)	Viewing Angle	V/C Table <sup>[5]</sup>	Description
-RLP <sup>[7]</sup>	RED	635	2.3	50	[5]	Low Power
-ALP <sup>[7]</sup>	AMB	583	2.1	50	[5]	Low Power
-GLP <sup>[7]</sup>	GRN	565	2.3	50	[5]	Low Power
-LRG <sup>[8]</sup>	RED/GRN	660/565	90/40	60	I	Bi-Color, Red Cathode
-RAG <sup>[8]</sup>	RED/AMB/GRN	630/565	6/6/6	60	I	Tri-Color, Common Cathode
-GAR <sup>[8]</sup>	GRN/AMB/RED	635/565	5/5/5	50	I	Tri-Color, Common Anode

6 Bezel Color
0 Black
9 White

[1] The C option specifies a pin length = .20" for panel lights mounted in the PS40 or PS44 socket (pg. 44). Mounting hardware is included with the socket. Do not select the W option.

[2] Model 405 has no lens. Omit the Lens Diffusion and Color (e.g. 405-BG5H-0).

[3] Iv = typical luminous intensity @ If = 20mA (Ta = 25°C). Iv is measured without lenses. For Low Power LEDs, If = 2mA.

[4] Use with Model 405 only.

[5] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[6] Ta = 25°C. Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC.

For AC operation, insert D after Voltage (e.g. 24HD), D indicates built-in rectifier; not required for 5H or 120VAC. DC operation not available for 120V. Bi-Color and Tri-Color not available in AC voltages.


[7] Omit H when selecting a voltage (e.g. 41-RLP12-CWO).

[8] Select -CW or -NW lens only. -RAG Wire Leads: green anode/black cathode/red anode. -GAR Wire Leads: green cathode/black anode/red cathode. Common lead is the first lead clockwise from reference mark on header. Tri-Color 5 or 12 volt, omit H in part number.


[9] Select high intensity LEDs only.

[10] Omit lens diffusion when selecting smoked lens. (e.g. 46-NWR-S0).


### 405 (no lens)

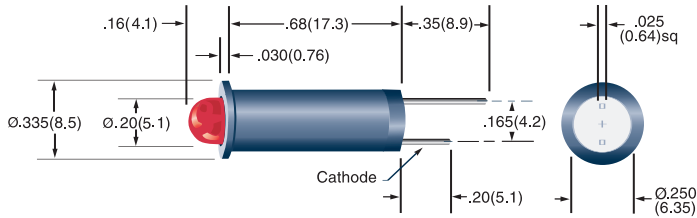


### 41

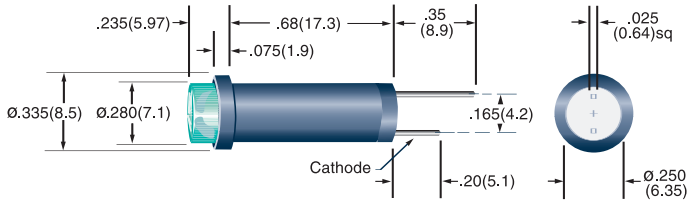


### 44 (flush lens)

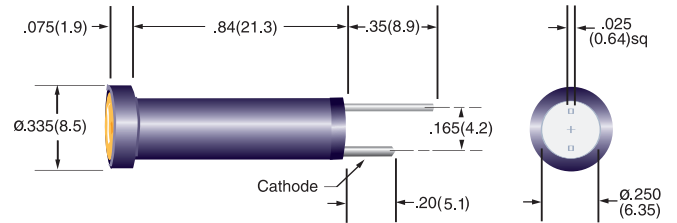


### 46

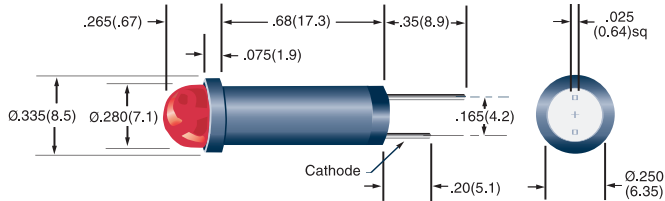


### 461

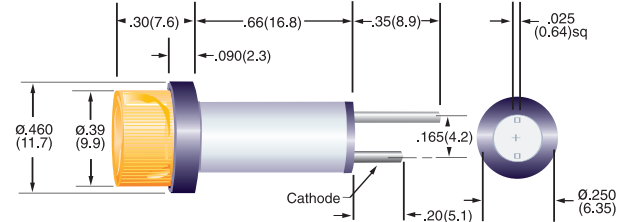

### 464

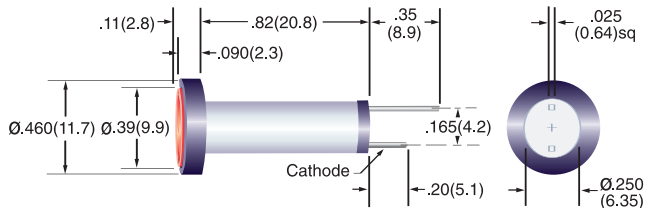

### TC4 & NW4, Mounting Hardware see note [1]

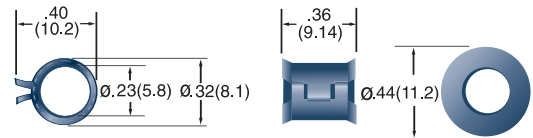

#### Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

#### All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)  
Specifications are subject to change without notice.

## 40 Series Mounting Hardware

- Sockets for 40 Series Panel Lights

### TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each SHADED column in the tables below.

1	Model/ Part #	2	# of Pins
	PS40		-2


→Part Number **PS40-2**

40 SERIES SOCKETS & WIRING PLUGS		
1	Model	Description
	PS40	Sockets for use with Models C405, C41, C46, C461
	PS44	Sockets for use with Models C44, C464
	SH40	Wiring Plug for use with 40 or C40 series
	CSH40	Wiring Plug for use with C40 series


2		Number of Pins	Configuration
		-2	2, 4
		-3	1, 2, 4
		-4	1, 2, 3, 4

40 SERIES HARDWARE	
Part Number	Description
CS24	Gold Plated Crimp Terminals
CS24T	Tin Plated Crimp Terminals
TC4	40 Series Mounting Clip
NW4	40 Series Mounting Washer

### PS40 TC5 & NW5 mounting hardware provided

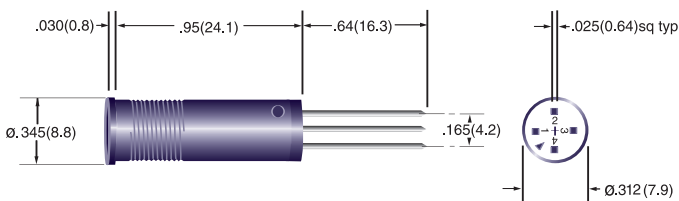


### PS44 TC5 & NW5 mounting hardware provided

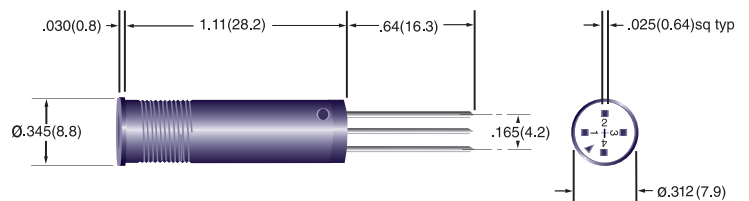





### SH40

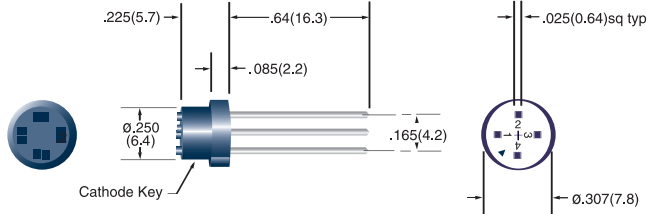


### CSH40

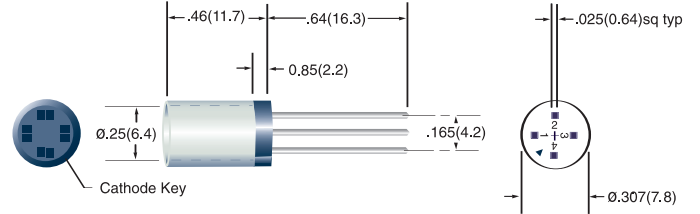

### CS24 & CS24T 22AWG to 28AWG



### TC4 & NW4, Mounting Hardware

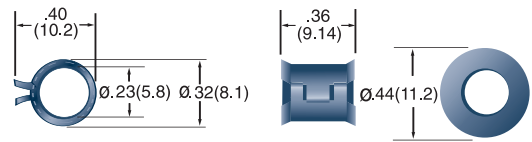

**All dimensions are in inches (mm)**

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)  
Specifications are subject to change without notice.