

Features

- · 4"x2" miniature size
- Universal AC input / Full range
- EMI Class B for both Class I (with FG) and Class $II \, (\mbox{without FG})$ configuration
- No load power consumption<0.3W
- · High efficiency up to 91%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection for 84W and 120W with 10CFM forced air
- Built-in 12V/0.5A fan supply
- · LED indicator for power on
- Operating altitude up to 5000 meters
- 3 years warranty


Applications

- Industrial automation machinery
- · Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus

Description

EPS-120 is a 120W highly reliable green PCB type power supply with a high power density on the 4" by 2" footprint. It accepts $80\sim264$ VAC input and offers various output voltages between 12V and 48V. The working efficiency is up to 91% and the extremely low no load power consumption is down below 0.3W. EPS-120 is able to be used for both Class I (with FG) and Class II (no FG) system design. EPS-120 has the complete protection functions; it is complied with the international safety regulations such as TUV EN60950-1, UL60950-1 and IEC60950-1. EPS-120 series serves as a high price-to-performance power supply solution for various industrial applications.

Model Encoding






SPECIFICATION

MODEL		EPS-120-12	EPS-120-15	EPS-120-24	EPS-120-27	EPS-120-48		
	DC VOLTAGE		12V	15V	24V	27V	48V	
	CURRENT	10CFM	10A	8A	5A	4.5A	2.5A	
	CURRENT	Convection	7.0A	5.6A	3.5A	3.15A	1.75A	
	RATED	10CFM	120W	120W	120W	121.5W	120W	
	POWER	Convection	84W	84W	84W	85W	84W	
OUTDUT	RIPPLE & NOISE (max.) Note.2		120mVp-p	120mVp-p	150mVp-p	150mVp-p	200mVp-p	
OUTPUT	VOLTAGE ADJ. RANGE		11.4~12.6V	14.3~15.8V	22.8~25.2V	25.6 ~ 28.4V	45.6 ~50.4V	
	VOLTAGE TOLERANCE Note.3		±2.0%	±2.5%	±1.0%	±1.0%	±1.0%	
	LINE REGUL	ATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	SETUP, RISE	TIME	500ms, 30ms/230VAC	500ms, 30ms/115	VAC at full load			
	HOLD UP TIME (Typ.)		50ms/230VAC 10ms/115VAC at full load					
	VOLTAGE RANGE Note.4		80 ~ 264VAC 113 ~ 370VDC					
	FREQUENCY RANGE		47 ~ 63Hz					
INPUT	EFFICIENCY	(Тур.)	88%	88.5%	90%	90%	91%	
INPUT	AC CURRENT	Г (Тур.)	2.1A/115VAC 1.2	2A/230VAC				
	INRUSH CURRENT (Typ.)		COLD START 30A/115VAC 60A/230VAC					
	LEAKAGE CURRENT		<0.75mA/240VAC					
	OVERLOAD		115~150% rated output power					
	OVERLOAD		Protection type : Hiccup mode, recovers automatically after fault condition is removed					
PROTECTION	01/55 1/01 54		13.2 ~ 15.6V	16.5 ~ 19.5V	26.4 ~ 31.2V	29.7 ~ 35V	52.8 ~ 62.4V	
	OVER VOLTA	.GE	Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMP	ERATURE	Protection type : Shut down o/p voltage, re-power on to recover					
FUNCTION FAN SUPPLY		12V@0.5A for driving a fan ; tolerance -15% ~ +10%						
	WORKING TE	MP.	-30 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY		20 ~ 90% RH non-condensing					
ENVIRONMENT			Y -40 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT		±0.03%/°C (0~50°C)					
		LTITUDE Note.6						
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
	SAFETY STA		UL60950-1, TUV EN60950-1, IEC60950-1, EAC TP TC 004 approved					
SAFETY &	WITHSTAND		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
EMC (Note 5)			I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
` ,	EMC EMISSIO		Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020					
	EMC IMMUNI	I Y	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2, heavy industry level, criteria A, EAC TP TC 020					
OTHERS	MTBF		653.5Khrs min. MIL-HDBK-217F (25°C)					
	DIMENSION		101.6*50.8*29mm (L*W*H)					
NOTE	PACKING	otore NOT and	0.15Kg; 72pcs/11.8Kg/0.82CUFT				Uro	
NOTE	2. Ripple & r 3. Tolerance 4. Derating r 5. The powe mounting EMC dire (as availal 6. The ambie	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. Derating may be needed under low input voltages. Please check the derating curve for more details. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 						




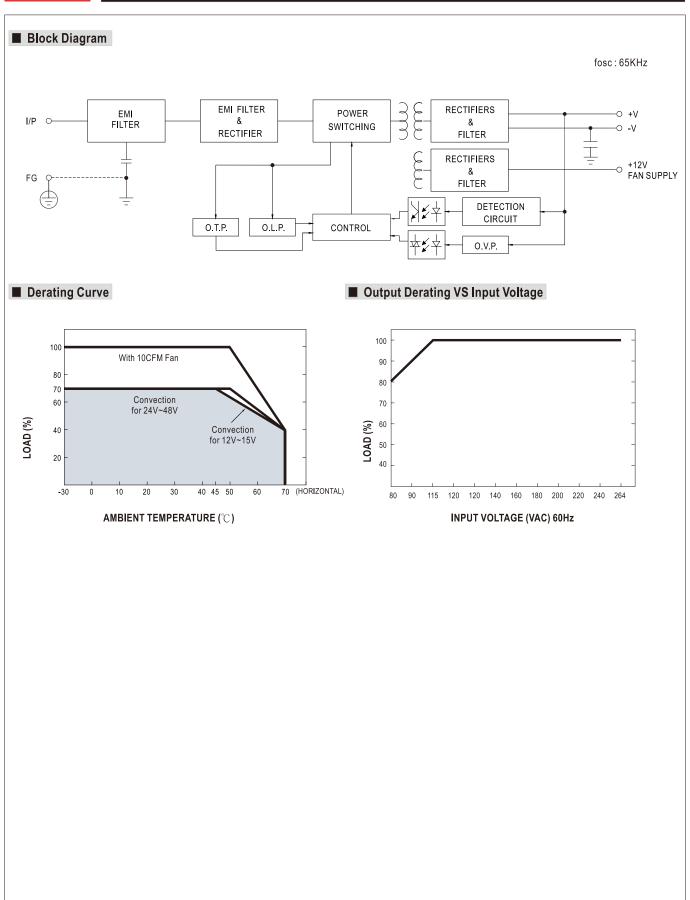




■ Mechanical Specification

Unit:mm

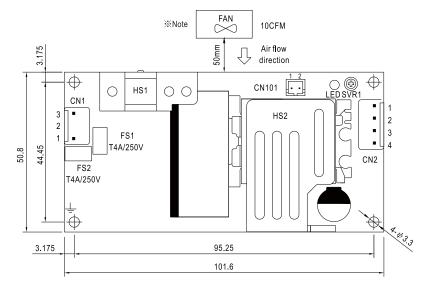

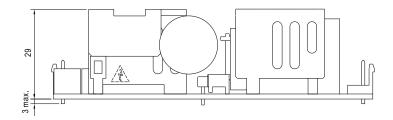

AC Input Connector (CN1): JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal	
1	AC/N	ICTVIID	10T 0\/\ 04T D4.4	
2	No Pin	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent	
3	AC/L	or oquiratoric		

±: Grounding required

1.HS1,HS2 cannot be shorted.

2.HS1 must have safety isolation distance with system case.

DC Output Connector (CN2): JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal	
1,2	+V	JST VHR	JST SVH-21T-P1.1	
3,4	-V	or equivalent	or equivalent	

FAN Connector(CN101): JST B2B-PH-K-S or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC COM	JST PHR-2	JST SPH-002T-P0.5S
2	+12V	or equiva l ent	or equiva l ent

**Note: 1. The FAN SUPPLY is designed to serve as the source of the additive external fan for the cooling of the power supply, enabling the full load delivery and assuring the best life span of the product. Please do not use this FAN SUPPLY to drive other devices.

2.The PCB type(Blank type)model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into either Class I (with FG) or Class II (without FG) system.

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html