

### TCXO/VC-TCXO **HIGH STABILITY**

# TG - 5006CJ/CG/CE

: 13 to 52MH(TG-5006CJ/CG) •Frequency range

13 to 20MHz, 26 to 40MHz(TG-5006CE)

1.8 V Typ./ 2.8 V Typ./ 3.0 V Typ./ 3.3 V Typ. Supply voltage

•Frequency / temperature characteristics

 $\pm 0.5 \times 10^{-6}$  Max or  $\pm 2.0 \times 10^{-6}$  Max.

Applications GPS. RF.

Wireless communication devices

(CDMA, WCDMA, LTE, WiMAX, other)

Features : High stability



Product Number (Please contact us) TG-5006CJ: X1G004131xxxx00 TG-5006CG: X1G004211xxxx00 TG-5006CE: X1G004201xxxx00







TG-5006CJ  $(2.0 \times 1.6 \times 0.73 \text{ mm})$ 

TG-5006CG  $(2.5 \times 2.0 \times 0.8 \text{ mm})$   $(3.2 \times 2.5 \times 0.9 \text{ mm})$ 

TG-5006CE

#### Actual size

TG-5006CJ	TG-5006CG	TG-5006CE
<b></b>		


### **Specifications (characteristics)**


Item	Symbol	VC-TCXO	TCXO	Conditions / Remarks
Output frequency range	fo	16.367667 MHz, 16.368 MHz, 16.369 MHz, 19.2 MHz, 26 MHz and 38.4 MHz		Standard frequency
	10	13.000 MHz to 52.000 MHz		TG-5006CJ/TG5006CG
		13.000 MHz to 20.000 MHz	,26.000 MHz to 40.000 MHz	TG-5006CE
Supply voltage	Vcc		o / 3.0 V ±5% / 3.3 V ±5%	Supply voltage range: 1.7 V to 3.465 V
Storage temperature	T_stg	-40 °C to	o +90 °C	Storage as single product.
Operating temperature	T_use	-30 °C to	o +85 °C	
Frequency tolerance	f_tol	±2.0 ×10 <sup>-6</sup> Max.		After reflow, +25 °C
Frequency/temperature characteristics	fo-Tc	$\pm 0.5 \times 10^{-6}$ Max. A	∕ -30 °C to +85 °C	High stability version for GPS
		±2.0 × 10 <sup>-6</sup> Max. /	∕ -30 °C to +85 °C	Standard stability version
		$\pm 2.0 \times 10^{-6}$ Max.	/ -40 °C to +85 °C	Customized product.(Option)
Frequency/load coefficient	fo-Load	±0.2 × 10 <sup>-6</sup> Max.		10 kΩ // 10 pF ±10 %
Frequency/voltage coefficient	fo-Vcc	±0.2 ×10 <sup>-6</sup> Max.		Vcc ±5%
Fraguency aging	f_age	±1.0 ×10 <sup>-6</sup> Max.		+25 ℃, First year,13 MHz ≦fo ≤40 MHz
Frequency aging		±1.5 ×10 <sup>-6</sup> Max.		+25 ℃ , First year,40 MHz <fo≦52 mhz<="" td=""></fo≦52>
Current consumption	Icc	1.5 mA Max.		13 MHz≦fo≦26 MHz
Current consumption		2.0 mA Max.		26 MHz <fo≦52 mhz<="" td=""></fo≦52>
Input resistance	Rin	$500 \text{ k}\Omega$ Min.	_	Vc- GND (DC)
Frequency control range	f_cont	$\pm 8.0 \times 10^{-6} \text{ to } \pm 15.0 \times 10^{-6}$	, <del>_</del>	Vc =0.9 V ±0.6 V (Vcc =1.8 V) or
				Vc =1.4 V ±1.0 V (Vcc =2.8 V) or
				Vc =1.5 V ±1.0 V (Vcc =3.0 V) or
				Vc =1.65 V ±1.0 V (Vcc =3.3 V)
Frequency change polarity		Positive polarity		
Symmetry	SYM	40 % to 60 %		GND level (DC cut)
Output voltage	VPP	0.8 V Min.		Peak to Peak
Start-up time	t_str	2.0 ms Max.		T=0 at 90% Vcc
Output load condition	Load_R	10 kΩ		DC cut capacitor = 0.01 μF
Catput load condition	Load_C	10 pF		

<sup>\*</sup> Note: Please contact us for requirements not listed in this specification.

**Product Name** TG-5006 CJ-\*\*\* 19.200000MHz (Standard form) 2 3 4

①Model ②Package type ③Spec segment (Please contact us) 4 Frequency

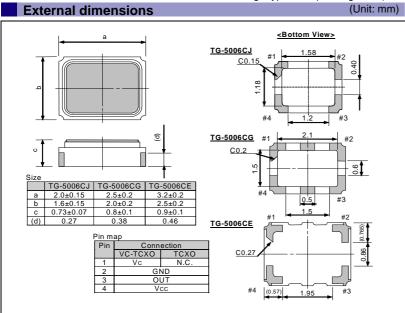



	TG-5006CJ	TG-5006CG	TG-5006CE
	(2.0×1.6mm)	(2.5×2.0mm)	(3.2×2.5mm)
Α	0.75	1.0	1.15
В	0.6	0.8	0.85
С	1.13	1.4	1.6
D	1.65	2.1	2.6

To maintain stable operation, provide a 0.01uF to 0.1uF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between Vcc - GND).

# PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

#### **WORKING FOR HIGH QUALITY**

In order provide high quality and reliable products and services than meet customer needs.

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

#### Explanation of the mark that are using it for the catalog



►Pb free.



- ► Complies with EU RoHS directive.
  - \*About the products without the Pb-free mark.

    Contains Pb in products exempted by EU RoHS directive.

    (Contains Pb in sealing glass, high melting temperature type solder or other.)



▶ Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.



 $\blacktriangleright$  Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc ).

## **Notice**

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson
  does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This
  material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
  - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.