





XDSL Splitter Filter Module



-  POTS Central Office Splitter for standard ADSL applications
-  UL 60950 certification pending for operational construction
-  Part of a standard series which has footprint compaibility
-  ADLS2+ compatible


Electrical Specifications @ 25°C - Operating Temperature -40 °C to +85 °C

PARAMETER	FREQUENCY	
POTS Impedance	100Hz to 4Hz	800Ω 100Ω + 50nF
POTS Insertion Loss	1kHz	0.6dB MAX
POTS Attenuation Distortion relative to 1 kHz	200Hz to 3.4kHz	-1.5 - + 0.5dB
NOTE: Attenuation is positive value, gain is negative	3.4Hz to 4kHz	-1.5 - + 1.0dB
POTS Delay Distortion	600Hz to 4kHz	200μSec MAX
POTS Return Loss	200Hz (SRL-L)	5dB MAX
	1kHz (ERL)	8dB MAX
	2.2kHz (SRL-H)	5dB MAX
Intermodulation Distortion (2nd and 3rd harmonics)	4-Tone IEEE 743 signal	250μSec MAX
Longitudinal Balance	200Hz to 3.2kHz	-58dB MIN
Tip to Ring Capacitance	20Hz to 30Hz	115nF MAX
ADSL Insertion Loss	30kHz to 300kHz	-65dB MIN
	300kHz to 2.2MHz	-55dB MIN
ADSL Input Impedance Loading	30kHz to 2.2MHz	0.25dB MAX
DC Current		100mA MAX
Total DC Resistance		25Ω MAX
Tip to Ring Isolation		600Vdc MIN
For information - behavior at VDSL frequencies:	2.2MHz to 12MHz	-60dB MIN
ADSL Insertion Loss	12MHz to 30MHz	-40dB MIN

XDSL Splitter Filter Module

Mechanical

B8120/B8120A

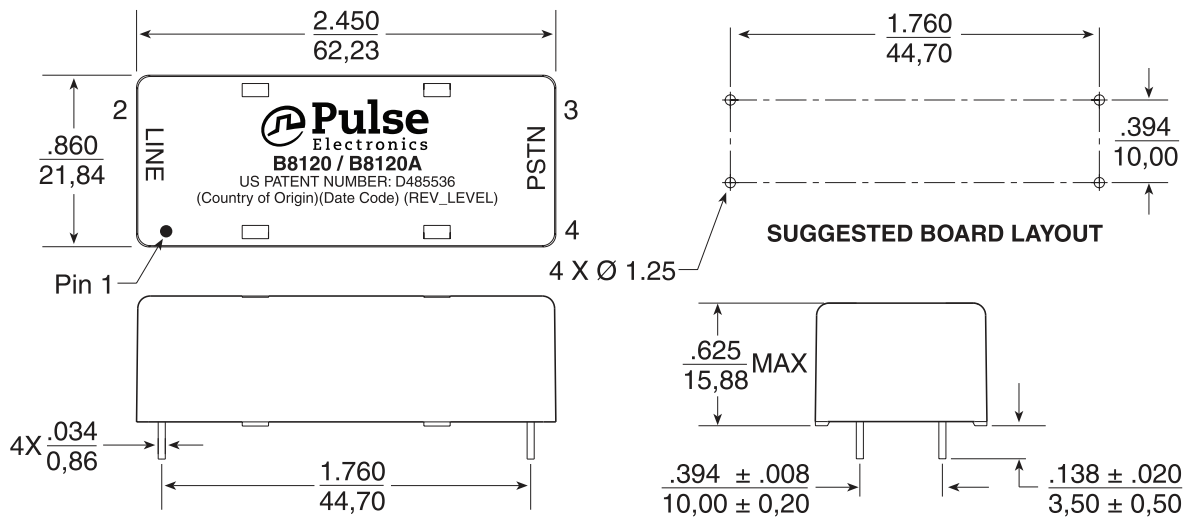


Weight26 grams
Tray30/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Schematics

B8120/B8120A

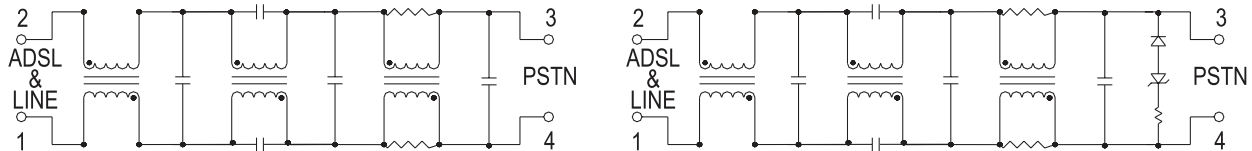

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejian Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 3396678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.