



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G2		REVISED BY ECO-11-004587	11MAR11	RK	HMR

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

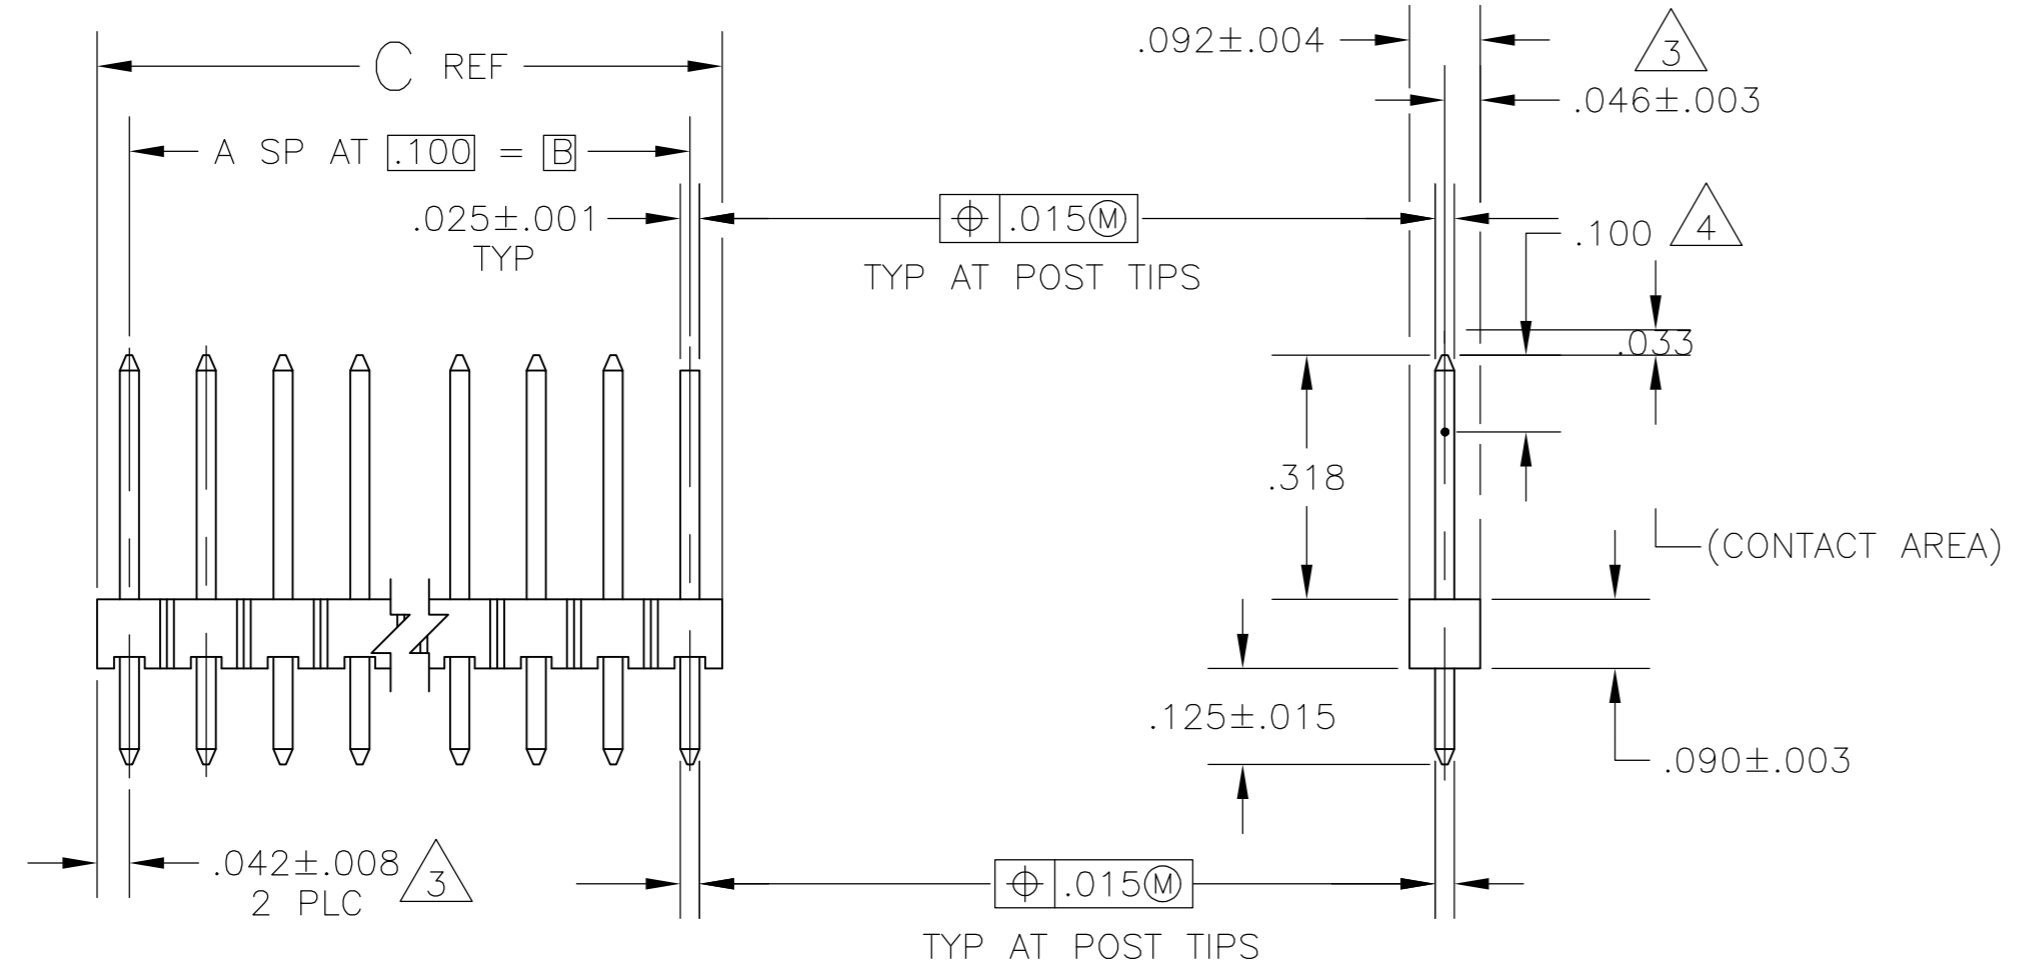

OBSOLETE	3.984	3.900	39	40	4-102976-0		
	3.884	3.800	38	39	3-102976-9		
	3.784	3.700	37	38	3-102976-8		
	3.684	3.600	36	37	3-102976-7		
	3.584	3.500	35	36	3-102976-6		
	3.484	3.400	34	35	3-102976-5		
	3.384	3.300	33	34	3-102976-4		
	3.284	3.200	32	33	3-102976-3		
	3.184	3.100	31	32	3-102976-2		
	3.084	3.000	30	31	3-102976-1		
	2.984	2.900	29	30	3-102976-0		
	2.884	2.800	28	29	2-102976-9		
	2.784	2.700	27	28	2-102976-8		
	2.684	2.600	26	27	2-102976-7		
	2.584	2.500	25	26	2-102976-6		
	2.484	2.400	24	25	2-102976-5		
	2.384	2.300	23	24	2-102976-4		
	2.284	2.200	22	23	2-102976-3		
	△ SUPERSEDED BY 7-146277-2	2.184	2.100	21	22	2-102976-2	
	△ OBSOLETE	2.084	2.000	20	21	2-102976-1	
	OBSOLETE	1.984	1.900	19	20	2-102976-0	
		1.884	1.800	18	19	1-102976-9	
		1.784	1.700	17	18	1-102976-8	
		1.684	1.600	16	17	1-102976-7	
	OBSOLETE	1.584	1.500	15	16	1-102976-6	
		1.484	1.400	14	15	1-102976-5	
		1.384	1.300	13	14	1-102976-4	
		1.284	1.200	12	13	1-102976-3	
	△ SUPERSEDED BY 6-146277-2	1.184	1.100	11	12	1-102976-2	
	OBSOLETE	1.084	1.000	10	11	1-102976-1	
		.984	.900	9	10	1-102976-0	
		.884	.800	8	9	102976-9	
		.784	.700	7	8	102976-8	
		△ SUPERSEDED BY 5-146277-7	.684	.600	6	7	102976-7
		.584	.500	5	6	102976-6	
		.484	.400	4	5	102976-5	
		.384	.300	3	4	102976-4	
	.284	.200	2	3	102976-3		
	.184	.100	1	2	102976-2		
	.084	—	—	1	102976-1		
C	B	A	NO OF POSN	PART NUMBER			

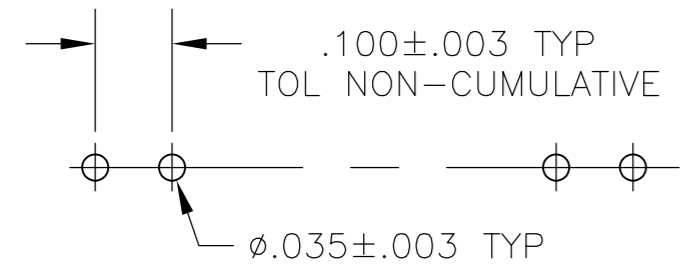

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 09OCT87	TE Connectivity		
DIMENSIONS: INCHES		CHK T. CLARK 12OCT87			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK 13OCT87	NAME		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		PRODUCT SPEC	HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, WITH .025 SQUARE POSTS		
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK; POSTS: PHOSPHOR BRONZE		APPLICATION SPEC	SIZE A2	CAGE CODE 00779	DRAWING NO C=102976
FINISH POSTS: .00020 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL		WEIGHT -	RESTRICTED TO	SCALE 4:1	SHEET 1 of 1
CUSTOMER DRAWING			REV G2		