


REVISION		
REV	DESCRIPTION	DATE
C	REVISED PER DCR C041087	11OCT2004

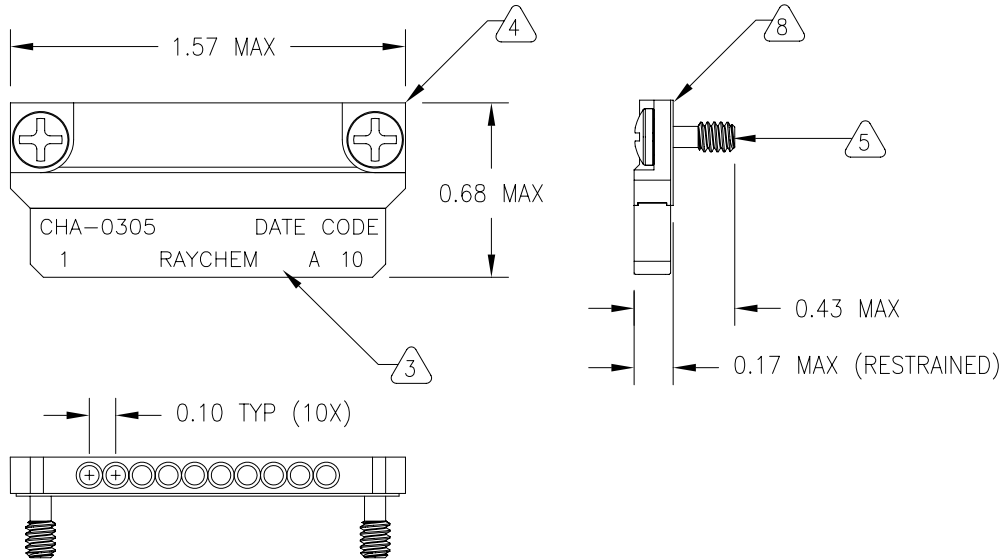

Notes:

1. Application: Electroless Nickel MTC SH1 Receptacle Shells
2. For Use With MIL-C 39029/58-360, Size 22 Contacts
3. End Cap: Glass Filled Nylon, Flame Retardant, Black
4. Main Body: Aluminum, Electroless Nickel Plated
5. Screws: 4-40 Phillips Head, A-286 CRES, Passivated, Captive, Self-Locking
6. Electrical Contacts: Brass / Beryllium Copper, Gold Plated
7. Markings: High Contrast Ink
8. Bus Bar, Beryllium Copper, Electroless Nickel Plated
9. Meets Raychem Specification C-6114 Requirements
10. Contact Cavity Bore Dia, Plated: .0685/0690 (REF)

© 2004 TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

SPECIFICATION CONTROL DRAWING					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMAL TOLERANCES .XXX ± 0.005 [0.13 mm] .XX ± 0.010 [0.25 mm] .X ± 0.020 [0.50 mm] ANGLE TOLERANCE .X ± 0.5 DEG. WEIGHT (NOM) LBS. 0.0126 [5.7 gm]	DRAWN T RATZLAFF	DATE 26MAR2004		TYCO ELECTRONICS 300 CONSTITUTION DRIVE MENLO PARK, CA 94025	<i>Raychem</i>
	MATERIAL SEE NOTES		TITLE 1-INCH MTC GROUNDING BLOCK WITHOUT FINGERS		
FINISH SEE NOTES		SIZE A		CAGE CODE 06090	DWG. NO. CHA-0305
THIRD ANGLE PROJECTION 		DO NOT SCALE THIS DRAWING			SHEET 1 OF 1
CAD FILE C041087.DWG					