

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.






LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-07-019157	8/21/07	SS	SRY

MATERIAL:  
 HOUSING: THERMOPLASTIC PA, UL94V-0, BLACK.  
 TERMINALS: BRIGHT TIN PLATE, COPPER ALLOY.  
 SCREWS: 6-32, STEEL, ZINC PLATED AND CLEAR CHROMATE.

ELECTRICAL:  
 UL CLASS C: 20A, 150V.  
 UL CLASS D: 10A, 300V.  
 CSA TYPE B: 20A, 300V.  
 CSA TYPE C: 20A, 300V.  
 CSA TYPE D: 10A, 300V.  
 CSA TYPE E: 20A, 300V.  
 WIRE RANGE: 12-22 AWG.

MECHANICAL:  
 OPERATING TEMP.: -40°C TO +105°C.  
 RECOMMENDED TIGHTENING TORQUE: 7 IN-LBS.

- ① TRIMMED TO LENGTH.
- ② PRELIMINARY PART NUMBER.

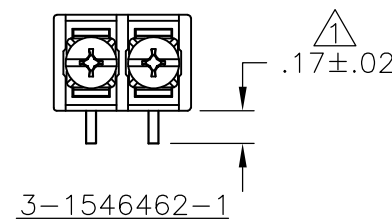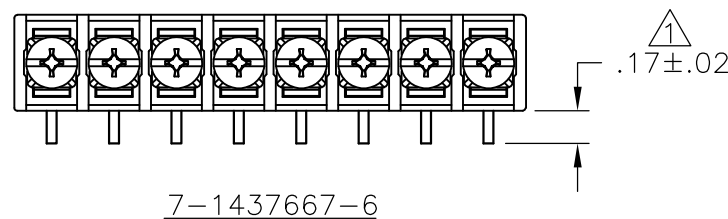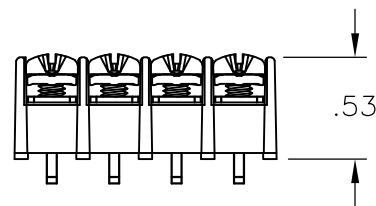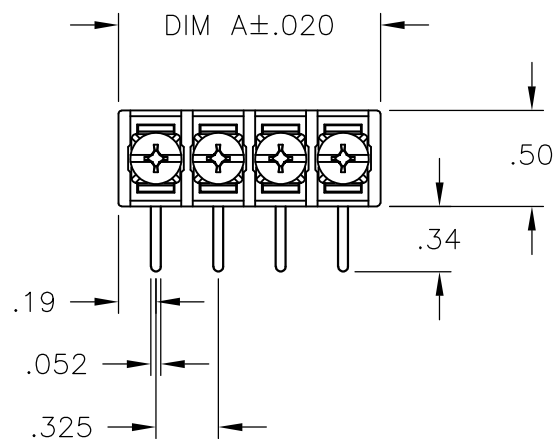

SEE FIGURE

SEE FIGURE

DIM A	NO OF POS	CATALOG NUMBER	PART NUMBER
9.815	30	4DB-R108-30	3-1546462-0
9.490	29	4DB-R108-29	2-1546462-9
9.165	28	4DB-R108-28	2-1546462-8
8.840	27	4DB-R108-27	2-1546462-7
8.515	26	4DB-R108-26	2-1546462-6
8.190	25	4DB-R108-25	2-1546462-5
7.865	24	4DB-R108-24	2-1546462-4
7.540	23	4DB-R108-23	1437668-7
7.215	22	4DB-R108-22	2-1546462-2
6.890	21	4DB-R108-21	2-1546462-1
6.565	20	4DB-R108-20	7-1437667-8
6.240	19	4DB-R108-19	1-1546462-9
5.915	18	4DB-R108-18	1-1546462-8
5.590	17	4DB-R108-17	1-1546462-7
5.265	16	4DB-R108-16	1-1546462-6
4.940	15	4DB-R108-15	7-1437667-7
4.615	14	4DB-R108-14	1-1546462-4
4.290	13	4DB-R108-13	1-1546462-3
3.965	12	4DB-R108-12	1-1546462-2
3.640	11	4DB-R108-11	1-1546462-1
3.315	10	4DB-R108-10	1-1546462-0
2.990	9	4DB-R108-09	1546462-9
2.665	8	4DB-R108-08-085	7-1437667-6
2.665	8	4DB-R108-08	1546462-8
2.340	7	4DB-R108-07	1546462-7
2.015	6	4DB-R108-06	7-1437667-5
1.690	5	4DB-R108-05	7-1437667-4
1.365	4	4DB-R108-04	7-1437667-3
1.040	3	4DB-R108-03	7-1437667-2
.715	2	4DB-R108-02-107	3-1546462-1
.715	2	4DB-R108-02	7-1437667-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S SCHLEGEL	1/21/03	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES		CHK	S YODER	1/21/03			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S YODER	1/21/03	NAME		
0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC		4DB SERIES			
MATERIAL		APPLICATION SPEC		R108 STYLE			
FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		-		A3	00779	G-7-1437667-1	-
CUSTOMER DRAWING				SCALE	NTS	SHEET	1 OF 1
				REV	B1		