

Control cabinet feed-through - CUC-BH-M12A1PBK-S/R4BE - 1414396

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Control cabinet feed-through, M12, 8-pos., A-coded on RJ45 socket, socket input 180°, IP65/67

Why buy this product

- Compact design
- 1 Gbps
- IP65/67
- UL



Ethernet

Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	40.0 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	8
Shielded	yes
Insertion/withdrawal cycles	≥ 100
Cable exit	straight
Color	black
Mounting type	Rear mounting

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
---------------------------------	------------------

Control cabinet feed-through - CUC-BH-M12A1PBK-S/R4BE - 1414396

Technical data

Material data

Flammability rating according to UL 94	V0
Housing material	PA
Contact material	Copper alloy

Electrical characteristics

Number of positions	8
Nominal voltage U_N	60 V
Nominal current I_N	0.5 A
Transmission characteristics (category)	CAT5 (IEC 11801:2002)
GRP transmission properties	Ethernet
Transmission speed	1 Gbps
Rated current	1.75 A

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Drawings


~~Exploded drawing~~

~~Exploded drawing~~

Dimensional drawing

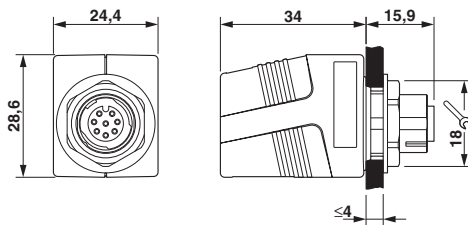

Dimensional drawing



Panel cutout

Classifications

eCl@ss

eCl@ss 8.0	27141134
eCl@ss 9.0	27141134

Control cabinet feed-through - CUC-BH-M12A1PBK-S/R4BE - 1414396

Classifications

ETIM

ETIM 5.0	EC001283
----------	----------

Approvals

Approvals

Approvals


EAC / UL Listed / cUL Listed / EAC / cULus Listed


Ex Approvals

Approvals submitted

Approval details

EAC

UL Listed 	
Nominal current IN	0.5 A
Nominal voltage UN	60 V

cUL Listed 	
Nominal current IN	0.5 A
Nominal voltage UN	60 V

EAC

Control cabinet feed-through - CUC-BH-M12A1PBK-S/R4BE - 1414396

Approvals

