


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 62.8              |
| B   | 2 1/4-16UN-2B     |
| C   | 35.7              |
| D   | 2-18NS-2A         |
| E   | 11.8              |
| F   | 64                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 7   | ZYLINDERGHÄUSE / BARREL             |
| 9   | ÜBERWURFMUTTER / COUPLING NUT       |
| 14  | F-ENDGEHÄUSE / F-ENDBELL            |

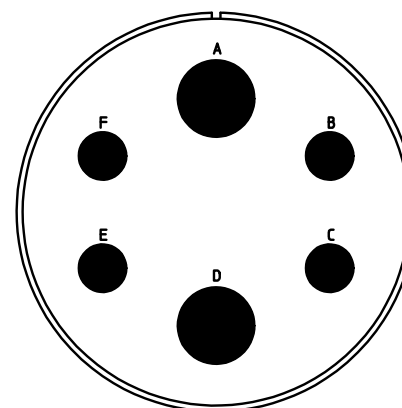

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

| Material Specification: |  |
|-------------------------|--|
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene   |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3106F36-6P-F80  
 Plug, straight  
 Endbell for flex tube  
 AWG Crimp / Pin / Layout: 36-6

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 769 16. Jul 18