


1. Wiring Diagram.

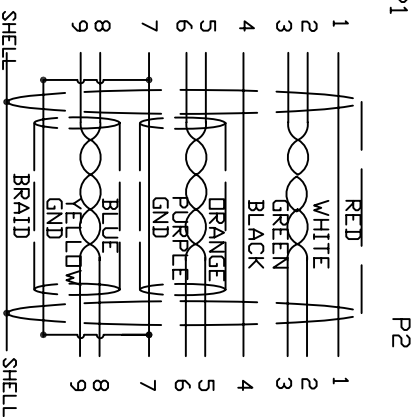

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3Each pcs with PE polybag.

6	CORE	RH14.2*28.5*6.35mm	2	
5	CONN	USB3.0 B MAILE G/F BLUE	1	P2
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LLDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	5000mm
NO.	PART NO.	DESCRIPTION		
		BILL OF MATERIAL		

A	INITIAL RELEASE	2014/08/28
REVECN#	DESCRIPTION	DATE
	103-1030-BL-F0500	REV A
CNC Tech, LLC		
DRAWN	DATE	TITLE
WENC	08/24/14	CABLE USB3.0 A/M TO B/M WITH FERRITES 5M
CHECKED	CUSTOMER P/N:	REV
EDWIN		A
APPROVAL	CUSTOMER:	
	SHEET 1 OF 1	