




ISO9001:2008 Certified

Mechanical Specifications (mm)

| | | |
|---|------|-------|
| D: | 23.0 | ± max |
| T: | 9.5 | ± max |
| Lead Diameter | 1.0 | ± nom |
| S: | 7.8 | ± nom |
| L: | 38.0 | ± nom |
| Coating Lead Run Down (straight Leads) | 5.0 | ± max |
| B: | 9.22 | ± nom |
| C: | 3.82 | ± nom |

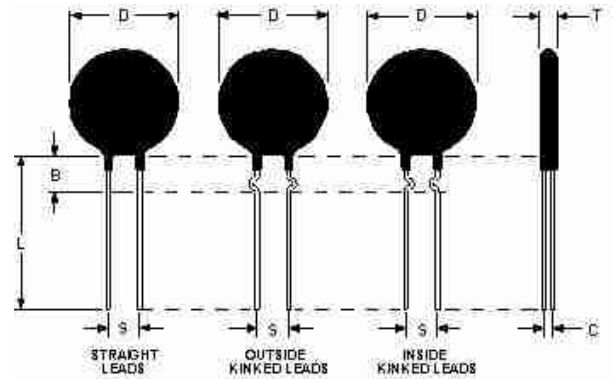

Electrical Specifications

| | | |
|---------------------------------------|--------|--------|
| Resistance: | 10.0 Ω | ± 25 % |
| Max Steady State Current upto 65°C: | 8.00 | A |
| Max Rec. Energy Rating: | 200 | J |
| Actual Failure Instantaneous Energy: | 450 | J |
| Maximum Capacitance @ 120 VAC: | 13,850 | µf |
| Maximum Capacitance @ 240 VAC: | 3,473 | µf |
| Maximum Capacitance @ 440 VAC: | 802 | µf |
| Maximum Capacitance @ 680 VAC: | 400 | µf |
| Resistance @ 100% Max Current: | 0.09 | Ω |
| Resistance @ 50% Max Current: | 0.18 | Ω |
| Body Temperature at 100% Max Current: | 194.00 | °c |
| Dissipation Constant: | 55.0 | mw/°c |
| Thermal Time Constant: | 112 | Sec. |
| Material Type (for Beta and Curve): | G | |

| | |
|--|--------------------------|
| MS22 10008 | |
| Date: 11/11/2008 | Drawn by: Erin Landis |
| Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com | Approved By: Mehdi Samii |
| | Revision: A |