


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- SPECIFICATION:
 JACKET: PVC. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR"
 OD: .150±.008 (3.8 mm)
 CONDUCTOR: BARE COPPER, STRANDING 259 x 0.07 mm = 1.00 mm², 17 AWG.
- RATING:
 VOLTAGE: 1,000 V CAT IV PER IEC 61010-031
 CURRENT: 20 A MAX.
 TEMPERATURE: -20° C TO +80° C.
- AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS – SEE MODEL NUMBER BELOW.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

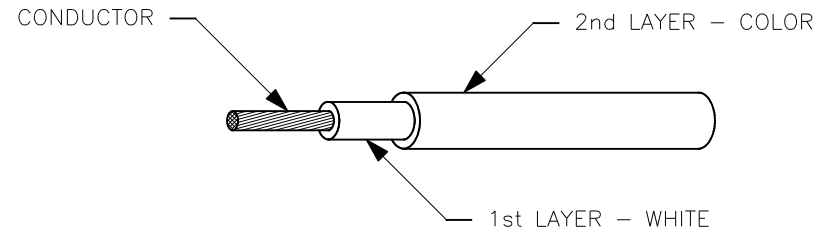

MODEL NUMBER

CT2880-#-XXX

COLOR: 0 - BLACK
 2 - RED
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 9 - WHITE

LENGTH: 10 - 10 m PACKAGE
 50 - 50 m SPOOL
 100 - 100 m SPOOL

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE			TITLE	
MATERIAL		DRAWN	WDH	7/11/99	WIRE, TEST LEAD, PVC JACKET, 1.00 mm ² , 17 AWG, 20 A			
FINISH		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY	USED ON	ENGR.			A	43F45	P288000	A
APPLICATION		DESIGN ACTIVITY			SCALE	NONE	SHEET 1 OF 1	