


.099-56 UNF-2B
(4 PLACES)

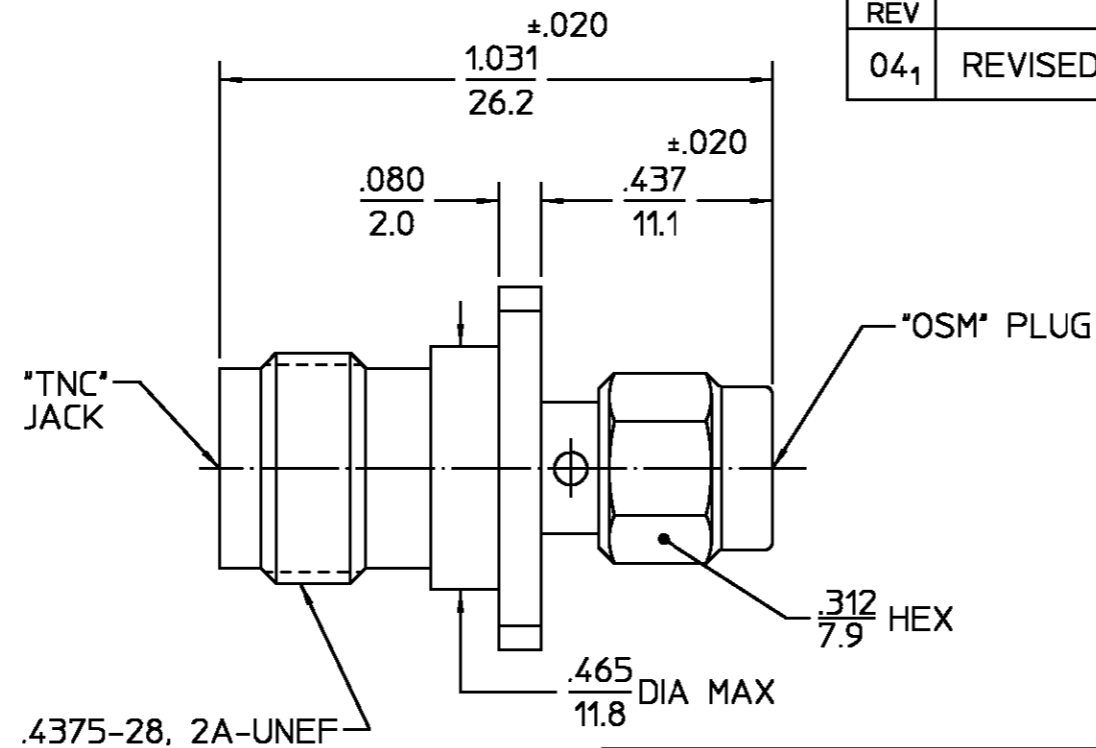

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
04 ₁	REVISED	4/1/96	DCM 4/1/96

.XXX = in
XX.X = mm

HOUSING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	GOLD PLATE PER MIL-G-45204
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY B.S.	DATE 8/3/89	AMP AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
	CHECKED BY S.A.	10/18/89		
	APPD BY B.C.	10/31/89		
FRAC. ± 1/64	DEC. ± .005	ANGLES ± 1°	TITLE "TNC" JACK TO "OSM" PLUG ADAPTER	
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.			USE ASSY PROCEDURE	NO. A.P. N/A
			SIZE B	CODE IDENT NO. 26805
			SCALE 5:1	3182-2243-00
			REV 04 ₁	
			SHEET 1 OF 1	

NOTES:
1. CAPTURED CENTER CONTACT

CUSTOMER DRAWING

AMP PART # 1057857-1
SHEET 1 OF 1 REV A