
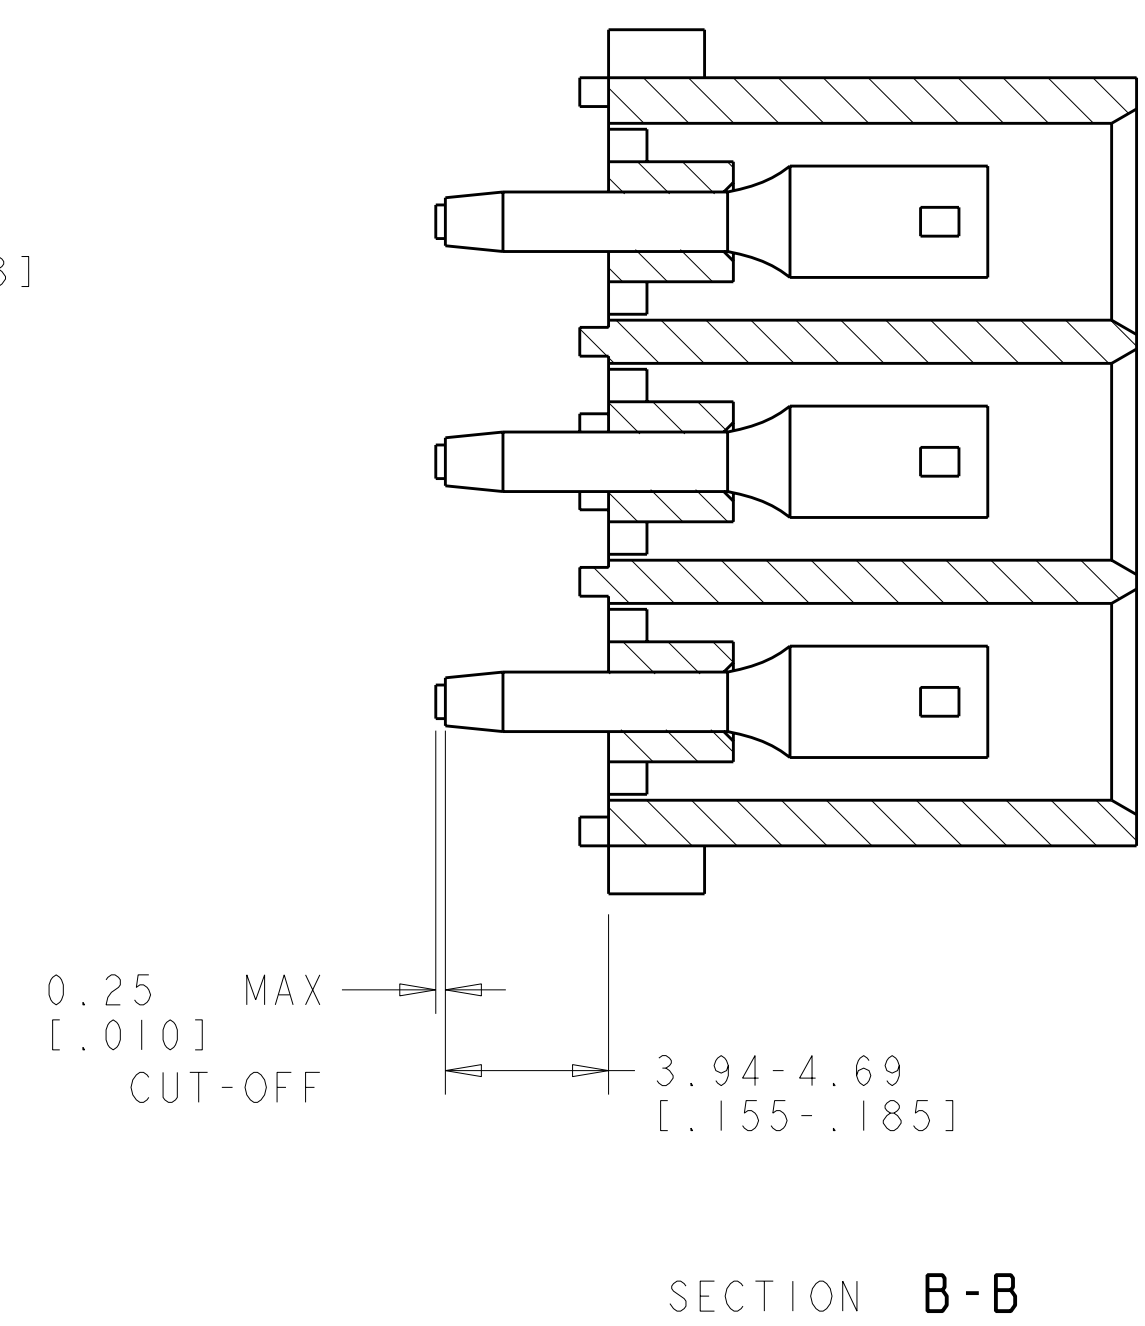
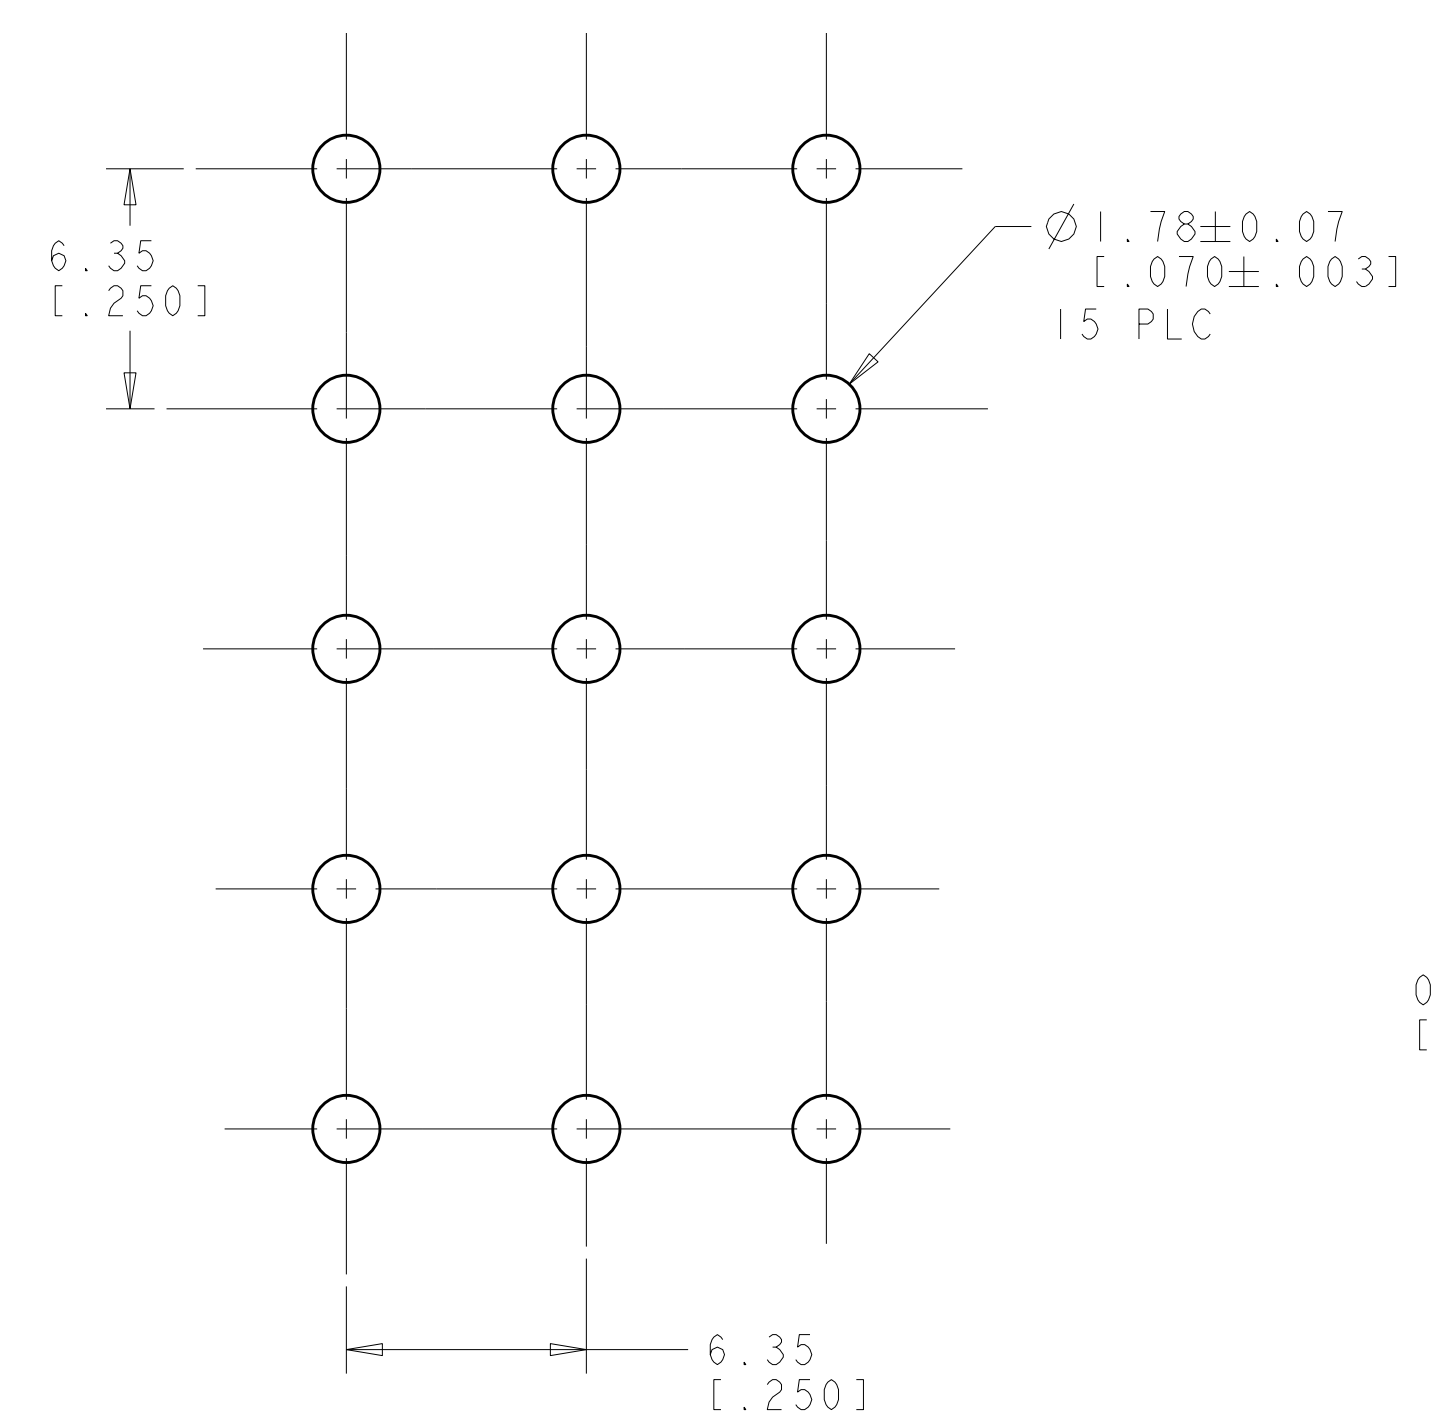
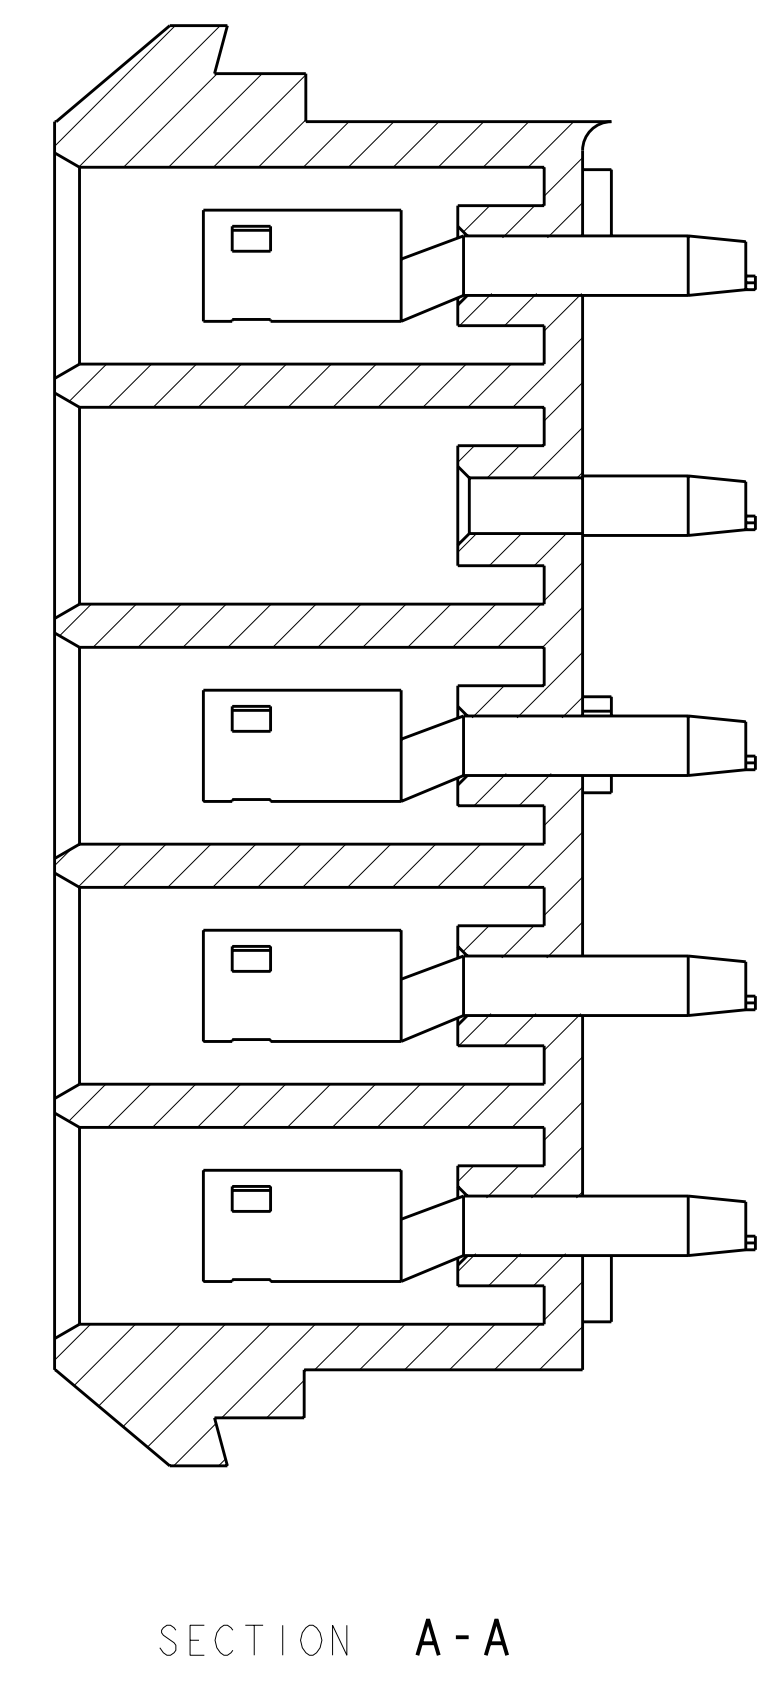
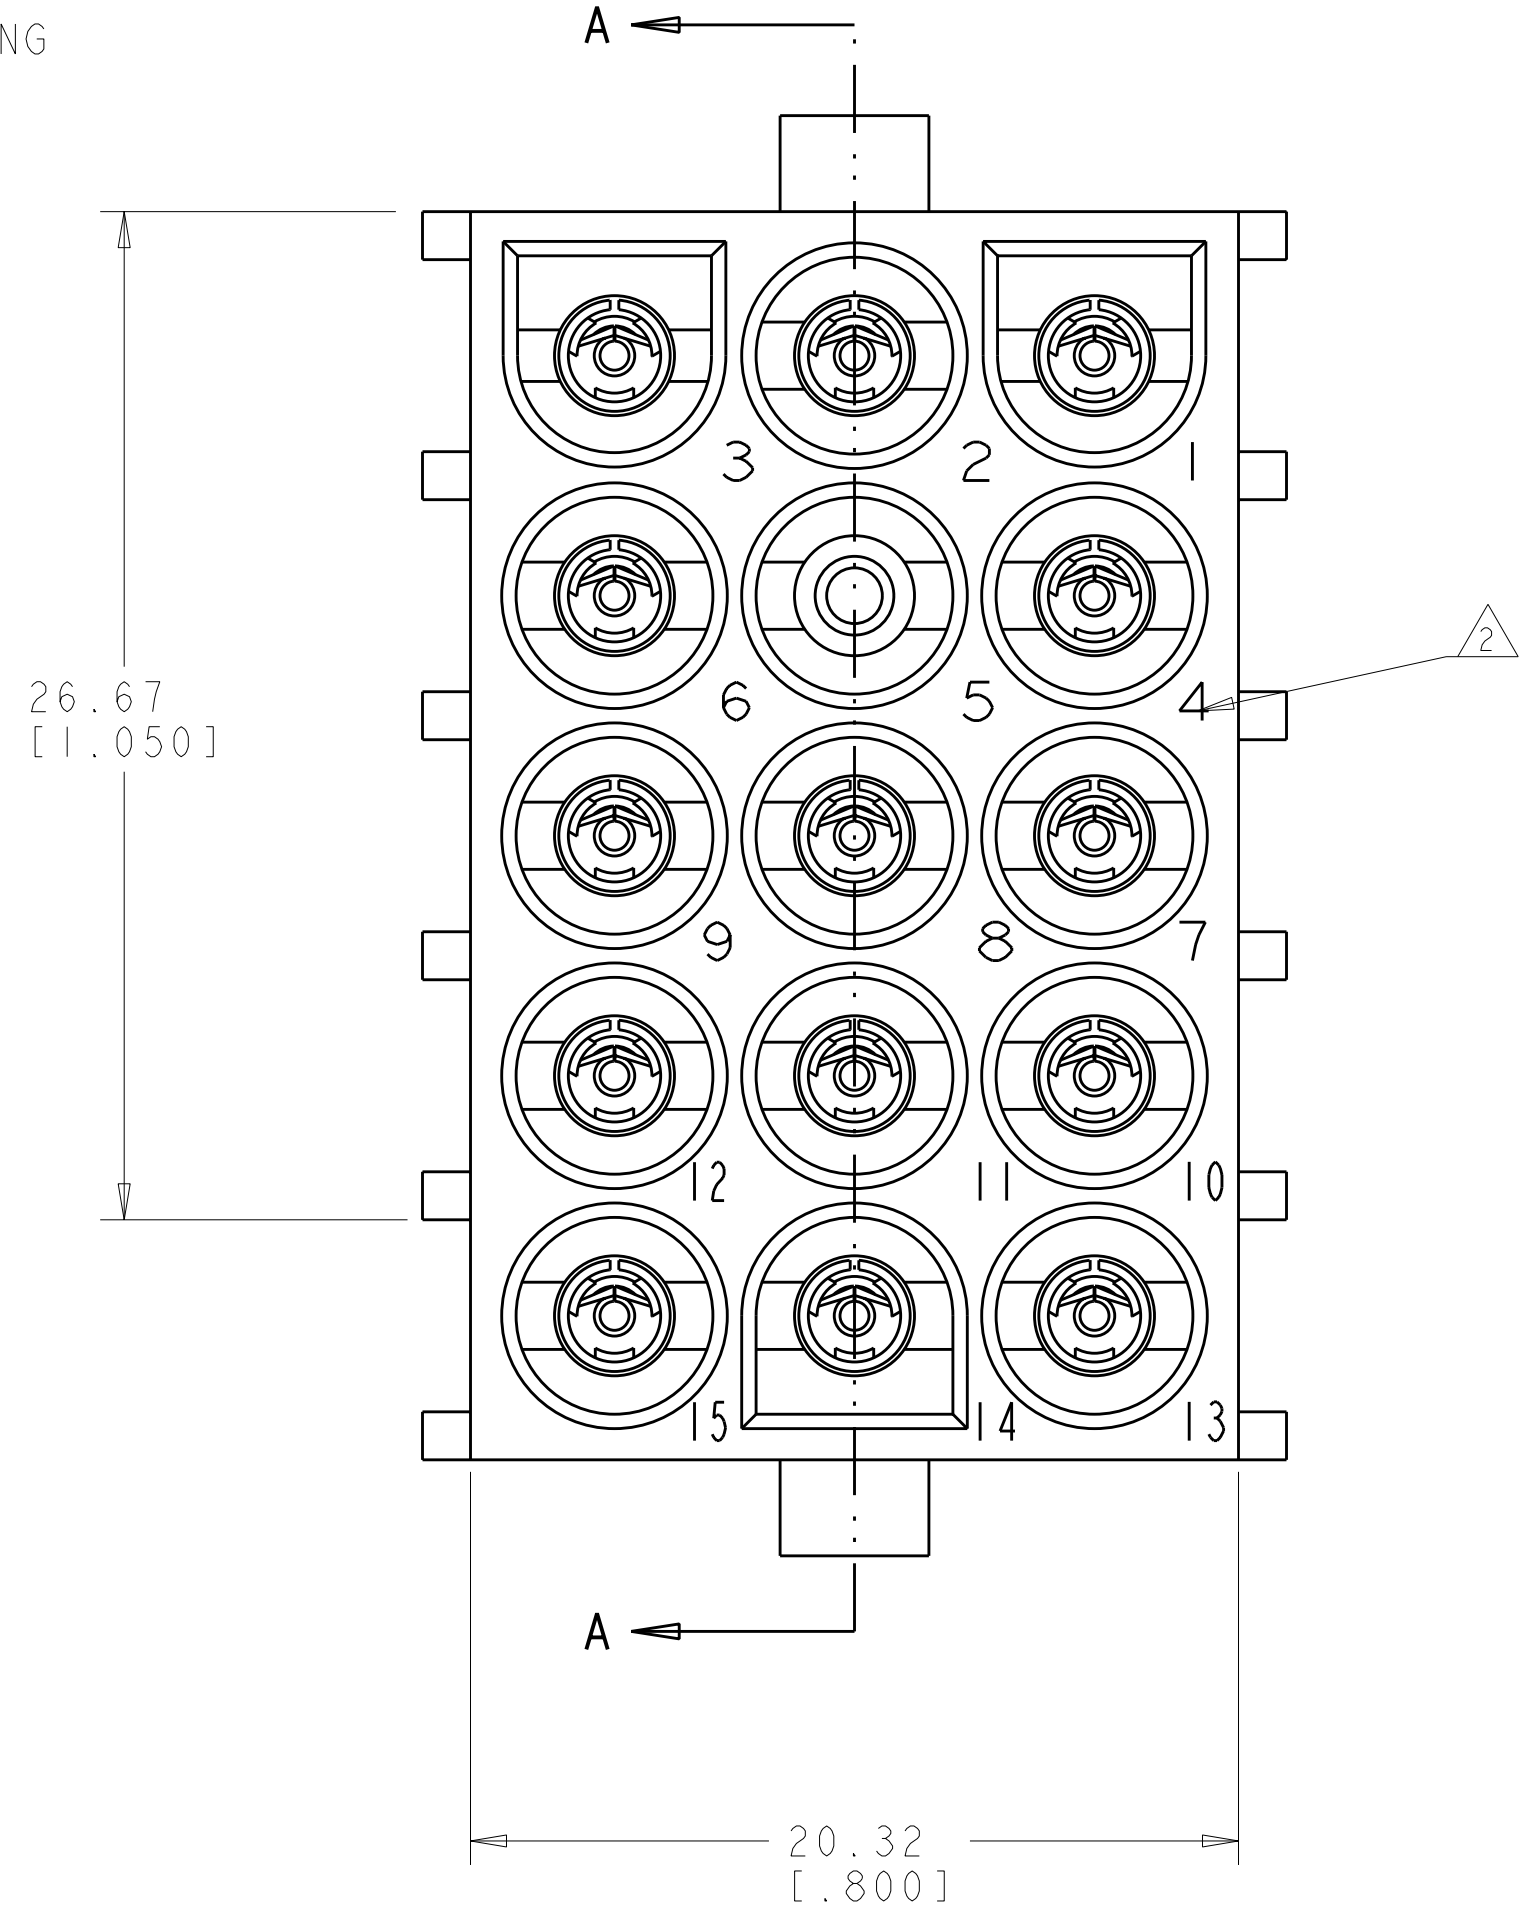


LOC	DIST	REVISIONS			
CM	00	REV	DATE	DWN	APVD
		A	RELEASED PER WR-05-27	04MAY05	KW SR
		A1	ECO-07-029079	07DEC2007	KW DC

- PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- DIMENSIONS IN BRACKETS ARE IN INCHES.

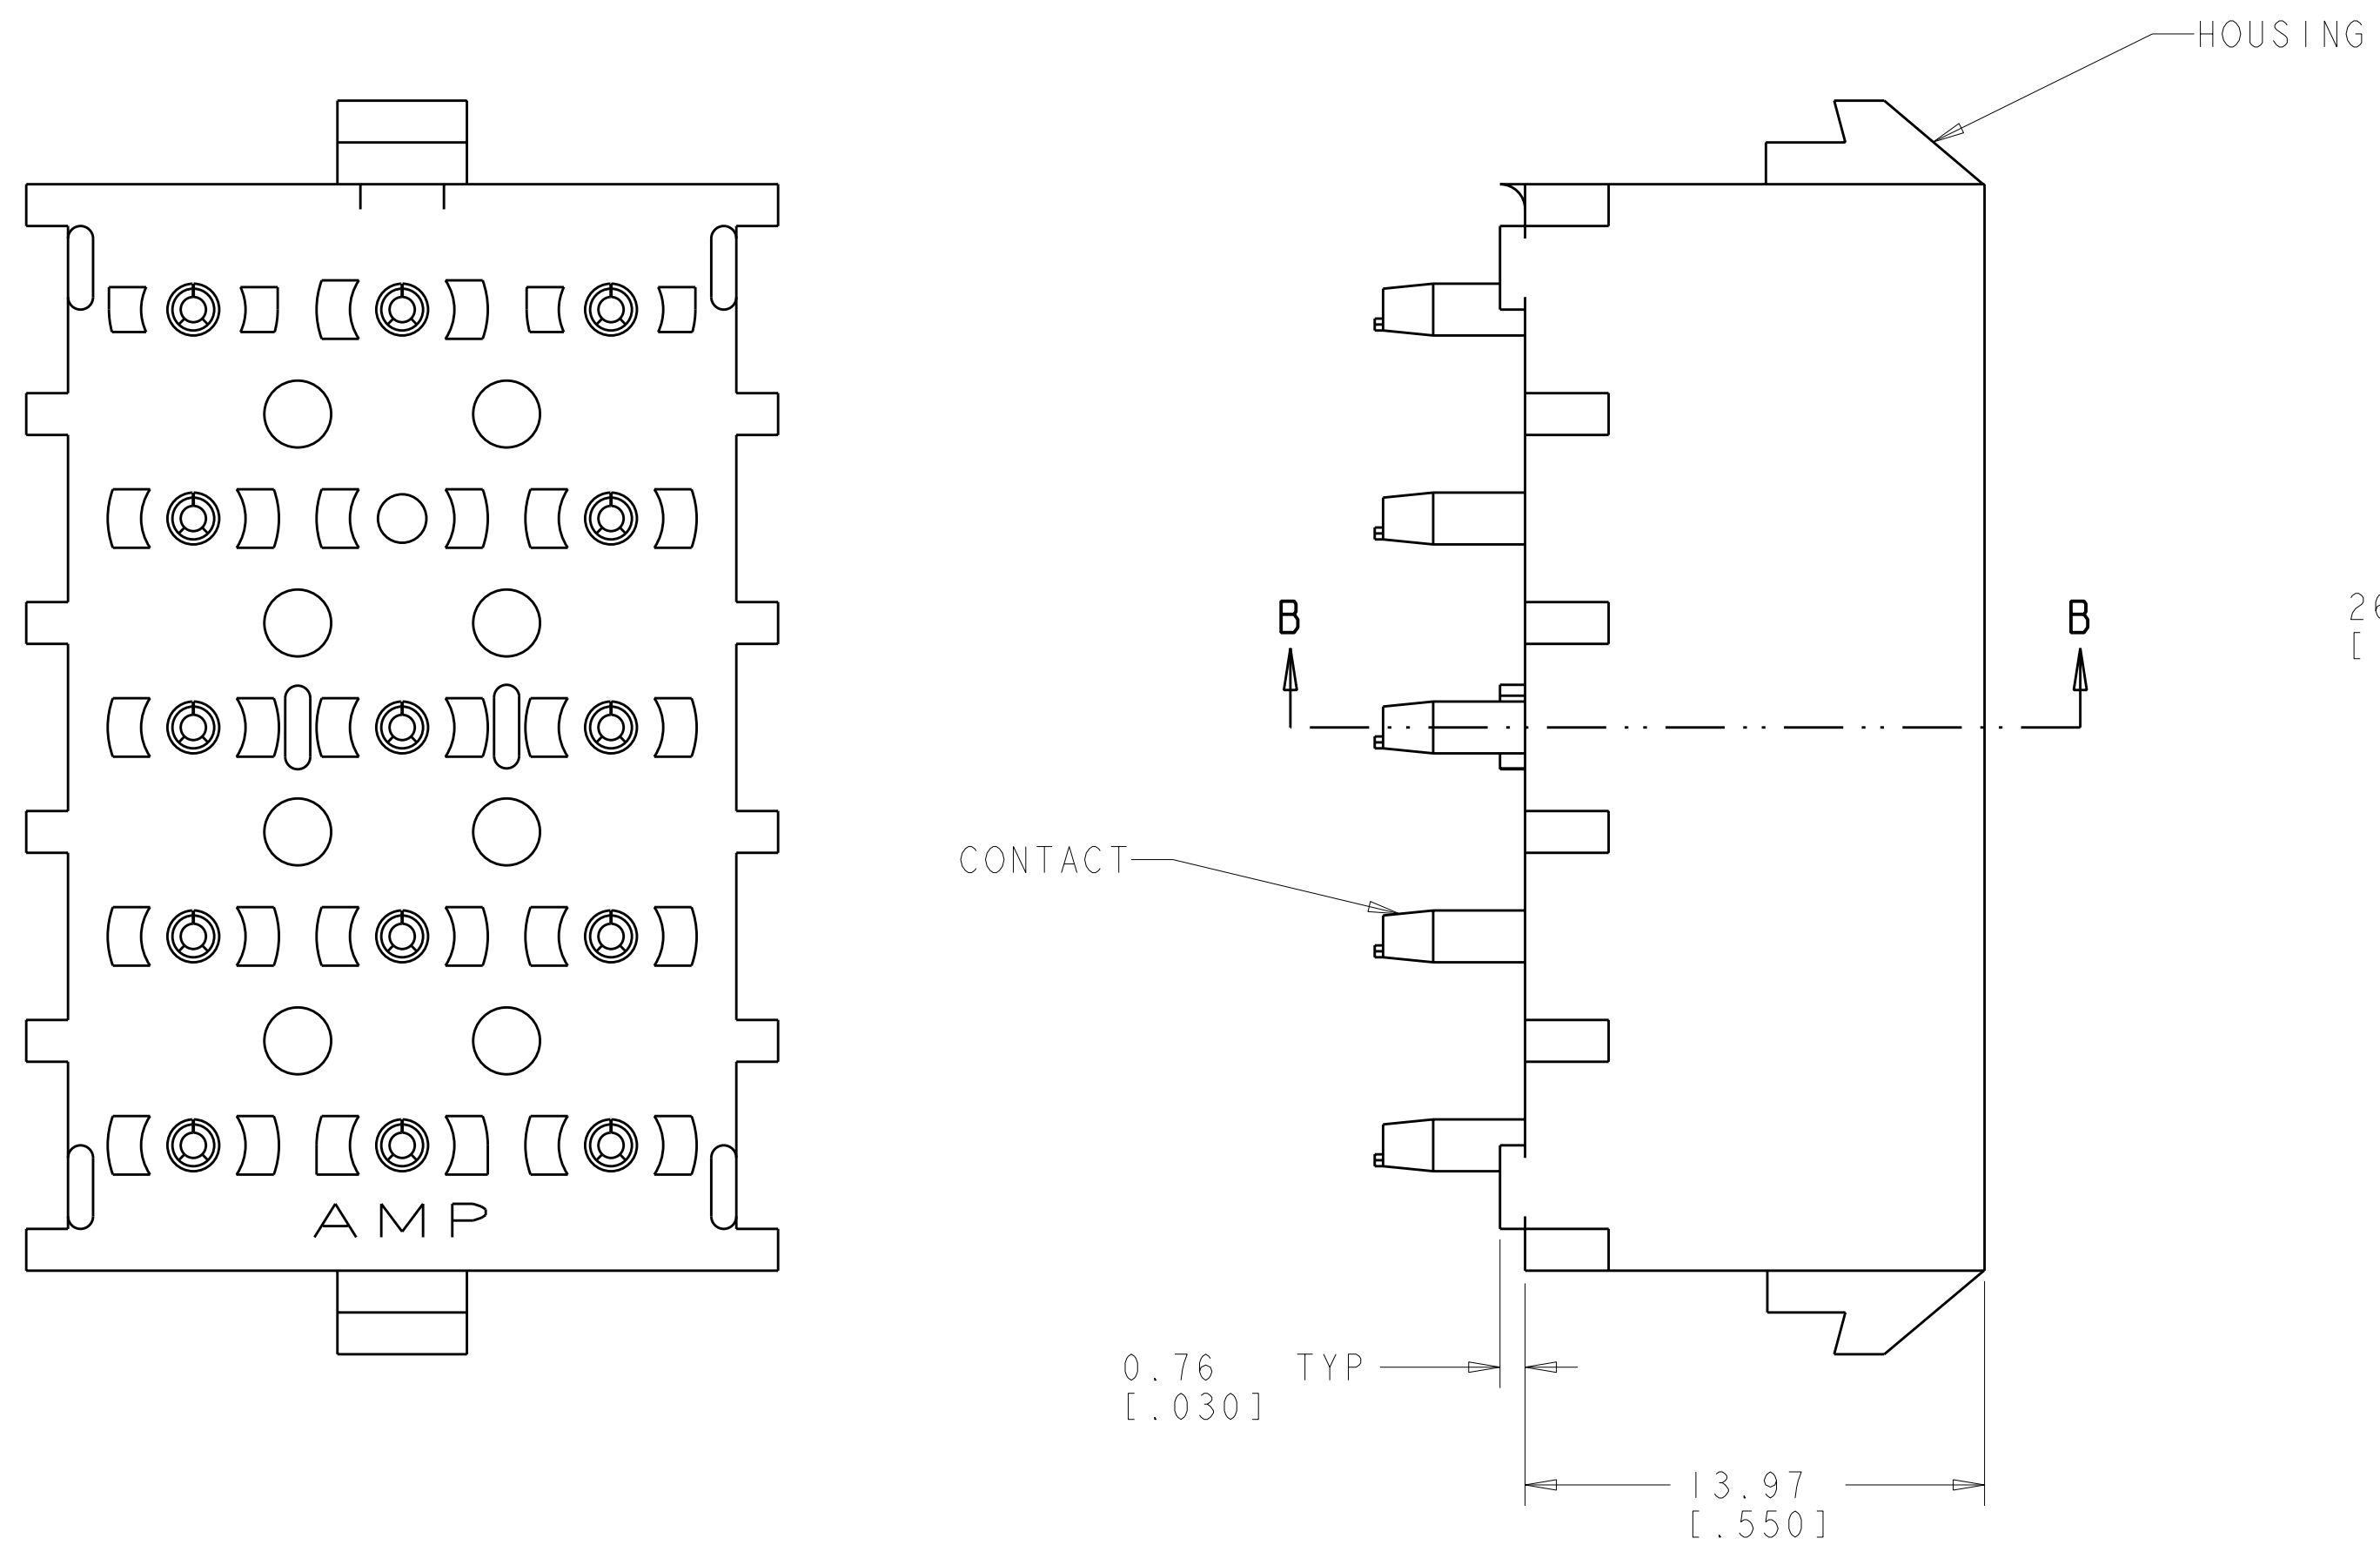

1586683-5 SHOWN

CONTACT NO	MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER
15	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-5
14	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-4
13	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-3
11	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-1
10	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-0
9	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586683-9
5	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586683-5

SOCKET NO OMITTED PIN CONTACT MATERIAL AND FINISH HOUSING MATERIAL AND COLOR PART NUMBER

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [ .062 ] THICK P.C. BOARD HOLE THAT CORRESPONDS TO REMOVED CONTACT CAN BE OMITTED



DIMENSIONS: mm [ INCHES ] 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± .013 [ .005 ] 5 PLC ± .013 [ .005 ] 4 PLC ± .013 [ .005 ] ANGLES ± 30°		DWN R. WHITAKER 04MAY2005 CHK S. RIDGILL 04MAY2005 APVD S. RIDGILL 04MAY2005		Tyco Electronics Harrisburg, PA 17105-3608	
MATERIAL: SEE TABLE FINISH: SEE TABLE		PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: -		NAME: SOCKET HEADER ASSEMBLY, 15 CIRCUIT, SELECTIVELY LOADED, UNIVERSAL MATE-N-LOK(TM) SIZE: CAGE CODE: DRAWING NO: 00779 ©=1586683 CUSTOMER DRAWING		RESTRICTED TO: - SCALE: 5:1 SHEET 1 OF 1 REV: A1	